ENGINEERING NEWS-RECORD

How to build a beach at economy prices *(p. 34)*

★ Small dam proves to be no small job *(p. 30)*

★ Office building pile design goes to work *(p. 32)*

A McGRAW-HILL PUBLICATION

E B POWER GS N
UNIVERSITY MICROFILMS IN
313 N 1 ST
ANN ARBOR MICH

Armco announces *New*

SMOOTH-FLO Sewer Pipe

Combining **TOP FLOW CAPACITY** and **STRENGTH** of Corrugated Metal

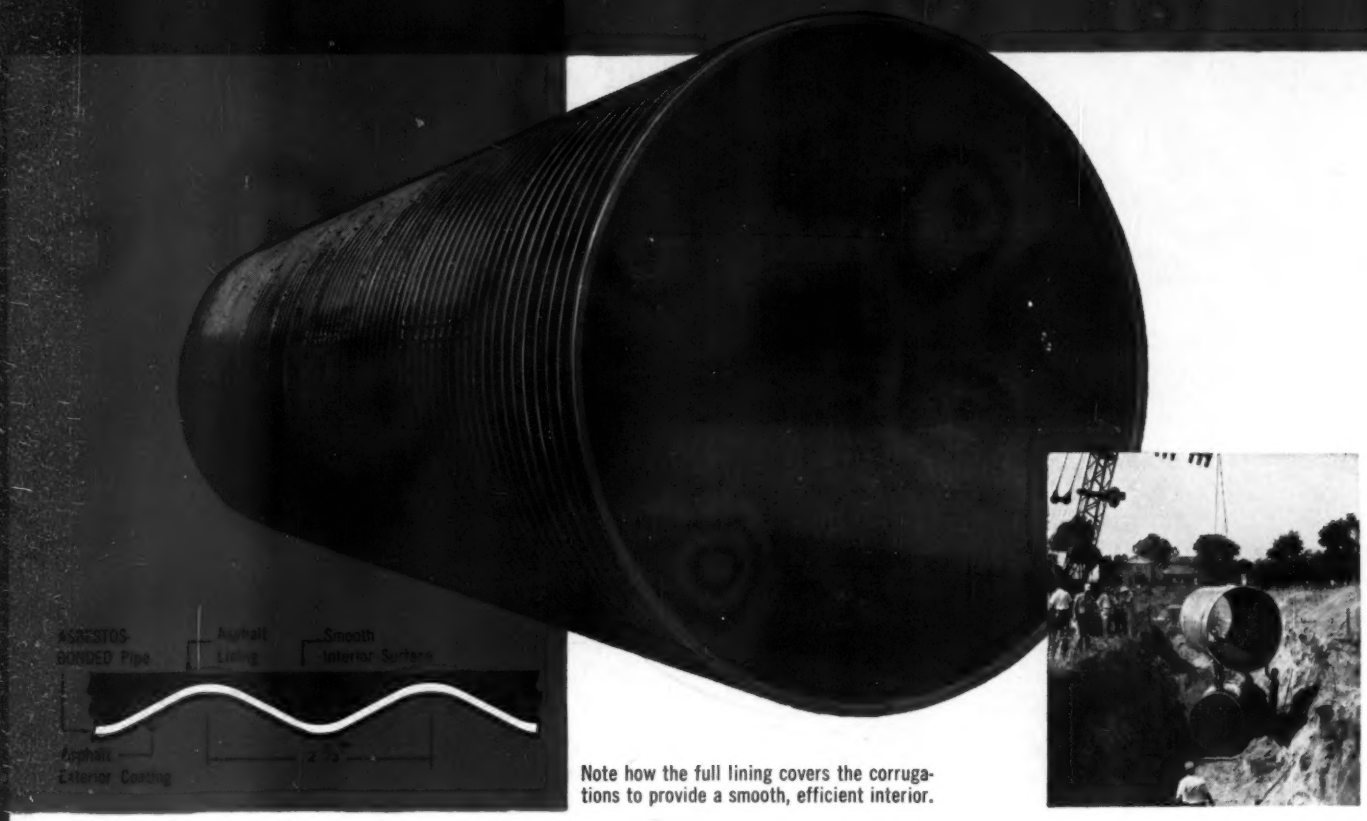

Note how the full lining covers the corrugations to provide a smooth, efficient interior.

For the first time in a single structure you can get *all* the features you need for efficient sewers — top flow capacity, strength and durability. New Armco SMOOTH-FLO Sewer Pipe is the result of more than 50 years' experience in developing drainage and construction products.

TOP FLOW CAPACITY

A smooth, centrifugally applied asphalt lining provides a flow capacity equal to or better than any other sewer pipe. This full lining fills the valleys of the corrugations. The special grade asphalt has been proved in 30 years of sewer service. It withstands heat and cold without cracking, melting or spalling. And it meets the most rugged tests for adhesion and toughness.

STRONG AND DURABLE

To retain continued high flow capacity any sewer must remain free from structural or material failures. Here's how Armco SMOOTH-FLO Sewer Pipe provides that assurance.

FLEXIBLE STRENGTH:
Withstands loads without cracking, breaking or crushing.

STRONG, TIGHT JOINTS:
Keep alignment good. Prevent infiltration of silt or ground water.

DURABILITY FOR EVERY SERVICE CONDITION:
Plain asphalt coating and lining for normal service or for severe conditions, Armco ASBESTOS-BONDED.

INSTALLED ECONOMY:
Long, lightweight sections, simple joints mean easier hauling and handling.

Ask for Complete Data

Write us for the complete story on Armco SMOOTH-FLO Sewer Pipe. Your nearby Armco engineer representative will gladly give you the facts. Armco Drainage & Metal Products, Inc., 6095 Curtis Street, Middletown, Ohio. Subsidiary of Armco Steel Corporation. In Canada: write Guelph, Ontario. Export: The Armco International Corporation.

ARMCO®

ARMCO *Smooth-Flo* SEWER PIPE

LA FERA LAYS IT ON THE LINE!

– tells how P&H 955-A trench hoe (2½ yd.) cuts costs on 8-mile trench job in New Jersey

"Despite water fill conditions our 955-A digs a trench 20′ wide and 22′ deep at a sustained rate of 80′ per day. That's 283.5 cu. yd. per operating hour. We believe we can outproduce other 2½-yard machines year after year with less adjustment, replacement and lay-up costs."

So says Joseph LaFera, President of the LaFera Contracting Company of Newark. And he makes no secret of his costs and operating data, now available in a Gould Report just off the press. Why not get the facts? See how P&H all-welded construction, greater stability, Magnetorque swing and other advanced features can help you get your costs to rock bottom. There's new profit here for you!

Ask for Gould Report #5505. Your P&H dealer can give you a copy, or write — P&H Power Crane and Shovel Division, HARNISCHFEGER CORPORATION, Milwaukee 46, Wisconsin.

HARNISCHFEGER

See your P&H dealer

"Your P&H Dealer has the experience, the organization and the facilities to serve you reliably in every way. He's ready to deliver the kind of on-the-ground service that keeps your jobs moving on schedule. Your P&H Dealer is tops in the business. Get to know him."

the P&H *Line*



Intake Tower, Kaw Power Station, Kansas City, Kansas, R. G. Aldridge, Gen. Con.

Symons Forms On 64′ Tower

Symons forms are used for architectural concrete on exterior and for intricate form work on the interior. Many corbels, inserts, buttresses, ladders and other details required on this job. Engineering for all form work done without charge. This service enabled the contractor to get a clear picture of his job (its cost, bill of materials and labor saving methods). Our fieldman also gave regular on-the-job service.

Send plans for your next job and get complete layout and cost sheet —no obligation. Symons Forms, Shores and Column Clamps can be rented with purchase option. Paid rentals apply on purchase price.

Symons

SYMONS CLAMP & MFG. CO., Dept. 1-5
4265 Diversey Ave., Chicago 39, Illinois

Please send information on items checked:
☐ Forms ☐ Shores ☐ Column Clamps

Name_____

Firm_____

Address_____

City_____ Zone____ State_____

ENGINEERING NEWS-RECORD

ABP Member ABC

Editorial Offices, 330 W. 42nd St., New York 36, N. Y.

Telephones: New York - LOngacre 4-3000; Chicago - MOhawk 4-5800; San Francisco DOuglas 2-4600; Washington - REpublic 7-6630

Number of Copies of this issue printed, 68,441

CONTENTS ON PAGE 17

Waldo G. Bowman
Editor

E. E. Halmos, Jr. ..... *Managing Editor*
J. J. Christie ..... *Asst. Managing Editor*
V. T. Boughton ..... *Transportation, Power*
F. S. Merritt ..... *Architectural, Structural*
S. C. Jensen ..... *Materials and Equipment*
A. J. Fox, Jr. ..... *Hydraulic, Water Supply, Sanitation*
J. P. Chamberlain ..... *Business and Finance*
J. R. Owen ..... *Municipal*
C. J. Harding ..... *Labor, Men and Jobs*
J. R. Carr ..... *Midwest (Chicago)*
L. L. Wise ..... *West (San Francisco)*
N. A. Bowers ..... *Consultant (San Francisco)*
Elsie Eaves ..... *Business News Department*
J. H. Webber ..... *Economics*
J. A. Mahoney, M. Wetzel ..... *Construction Reports*
M. W. Roessler, E. R. Huber ..... *Statistics, Costs, Prices*
M. V. Leggiero ..... *Layout & Makeup*
D. E. O'Shea ..... *Production*
B. J. Lamb ..... *Rewrite*
J. C. Greenough ..... *Printing*

Washington News Bureau, Room 1189 National Press Building; G. B. Bryant, Jr., *Manager*, Glen Bayless, A. E. Adams, Jay Flocken, Boyd France, William Gilmour, Sam Justice, D. O. Loomis, Gladys Montgomery, A. L. Moore, William Olcott, M. A. Reichek, Caroline Robertson, J. T. Skelly, V. B. Smith.

Domestic News Bureaus: Atlanta, 1321 Rhodes-Haverty Bldg., W. A. Kearns; **Cleveland,** 1510 Hanna Bldg., R. A. Cochrane; **Detroit,** 856 Penobscot Bldg., J. C. Jones, Jr.; **Houston,** 1303 Prudential Bldg., J. A. Lee; **San Francisco,** 68 Post Street, M. C. Ralston; **Los Angeles,** 1111 Wilshire Blvd., John Shinn; **Seattle,** 6040 Fifth Ave., N.E., Ray Bloomberg.

Correspondents: Albany, Albuquerque, Augusta, Me., Austin, Boston, Boulder, Baltimore, Birmingham, Bismarck, Charleston (W. Va.), Charleston (S. C.), Columbus, Cincinnati, Cleveland, Chicago, Cheyenne, Dallas, Denver, Detroit, Durham, Harrisburg, Helena, Houston, Hartford, Indianapolis, Jackson, Miss., Jacksonville, Jefferson City, Kansas City (Mo.), Lansing, Lincoln, Little Rock, Miami, Memphis, Minneapolis, Montgomery, Milwaukee, New Orleans, Norfolk, Omaha, Oklahoma City, Philadelphia, Pittsburgh, Portland (Ore.), Providence, Phoenix, Pierre, St. Louis, Schenectady, Syracuse, St. Paul, Seattle, Salt Lake City, Spokane, Topeka, Trenton, Wilmington. **Canada:** Montreal, Toronto, Ottawa, Victoria, Regina.

McGraw-Hill Economics Department: Dexter M. Keezer, director; W. H. Chartener

Foreign News Bureau: Editor, John Wilhelm, **New York;** G. W. Schroeder, **Bonn;** Edward W. S. Hull, **London;** John H. Kearney, **Mexico City;** John O. Coppock, **Paris;** Dan Kurzman, **Tokyo;** Peter Weaver, **Rio de Janeiro;** Gordon Graham, **Bombay. Correspondents:** Amsterdam, Athens, Bangkok, Bogota, Brussels, Buenos Aires, Caracas, Copenhagen, Geneva, Havana, Helsinki, Johannesburg, Lima, Madrid, Melbourne, Oslo, Rome, Stockholm, Sydney, Tehran and 21 other principal cities and countries.

Robert F. Boger
Publisher

September 8, 1955 ENGINEERING NEWS-RECORD Vol. 155, No. 10

Member ABC and ABP

Published weekly by McGraw-Hill Publishing Company, James H. McGraw (1860-1948), Founder, **Executive, Editorial, Advertising and Subscription Offices, McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y.** Publication Office, 99-129 North Broadway, Albany 1, N. Y. Donald C. McGraw, President; Paul Montgomery, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Nelson Bond, Executive Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Joseph H. Allen, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Circulation Director. **SUBSCRIPTIONS:** Address correspondence to Engineering News-Record—Subscription Service, 99-129 North Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address. Subscriptions are solicited only from persons with an identifiable commercial or professional interest in construction and building. **Position and company connection must be indicated on subscription orders.** Single copies 35¢. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada $8.00 a year; $12.00 for two years; $16.00 for three years. Other Western Hemisphere and the Philippines, $15.00 a year; $25.00 for two years; $30.00 for three years. All other countries $20.00 a year; $30.00 for two years; $40.00 for three years. Second class mail privileges authorized at Albany, New York.

Printed in U. S. A. Copyright 1955 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

The ISBELL CONSTRUCTION CO. of RENO, NEVADA

is proud of their Northwests—*they must be* for you will find this lettering on the cab of their latest piece of Northwest equipment—"Our 41st Northwest."

We are mighty proud of the fact that the Isbell Construction Co. *is* proud of their Northwests and every contractor might give some thought as to the type of service the Isbell people have had from their equipment. First—to have purchased Northwests to the number of 41. Second—to ask the manufacturer to letter on their latest machine, "Our 41st Northwest."

It's the type of service and output *you* want.

NORTHWEST ENGINEERING COMPANY
135 South LaSalle Street • Chicago 3, Illinois

NORTHWEST

CRAWLER and TRUCK MOUNTED SHOVELS • CRANES • DRAGLINES • PULLSHOVELS

YOU CAN'T HAVE NORTHWEST ADVANTAGES UNLESS YOU OWN A NORTHWEST

POWER when you need it

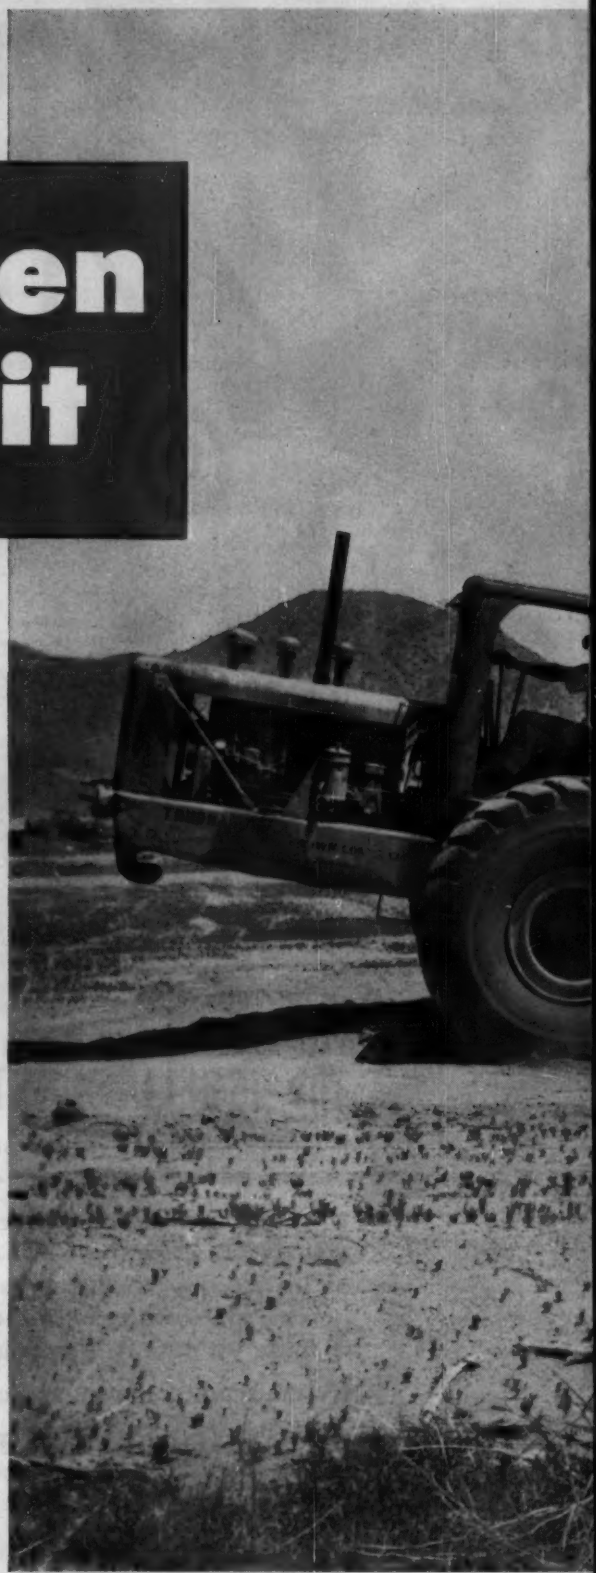

You'll keep your engines in shape for full-power performance by lubricating with one of the famous *Texaco Ursa Oils*. These great oils keep engines clean and free from harmful deposits, keep rings free and ports clear. Thus, you enjoy consistently dependable performance and low maintenance costs.

Texaco Ursa Oils are a complete line of lubricating oils especially refined and processed to make diesel and heavy duty gasoline engines deliver *more power* with *less fuel* over *longer periods* between overhauls.

For air compressors and hydraulic mechanisms, use *Texaco Regal Oil R&O* — it keeps compressor systems clean; prevents rust, sludge and foam in hydraulic systems. And to assure longer drill life, use *Texaco Rock Drill Lubricant EP*.

With effective Texaco lubrication, all your machinery and equipment will stay in service longer, operate at top efficiency. For expert advice in selecting the proper lubricants, consult a Texaco Lubrication Engineer. Just call the nearest of the more than 2,000 Texaco Distributing Plants in the 48 States, or write The Texas Company, 135 East 42nd Street, New York 17, N. Y.

TUNE IN . . .
TEXACO STAR THEATER
starring
JIMMY DURANTE
on television . . .
Saturday nights, NBC.

TEXACO

TEXACO

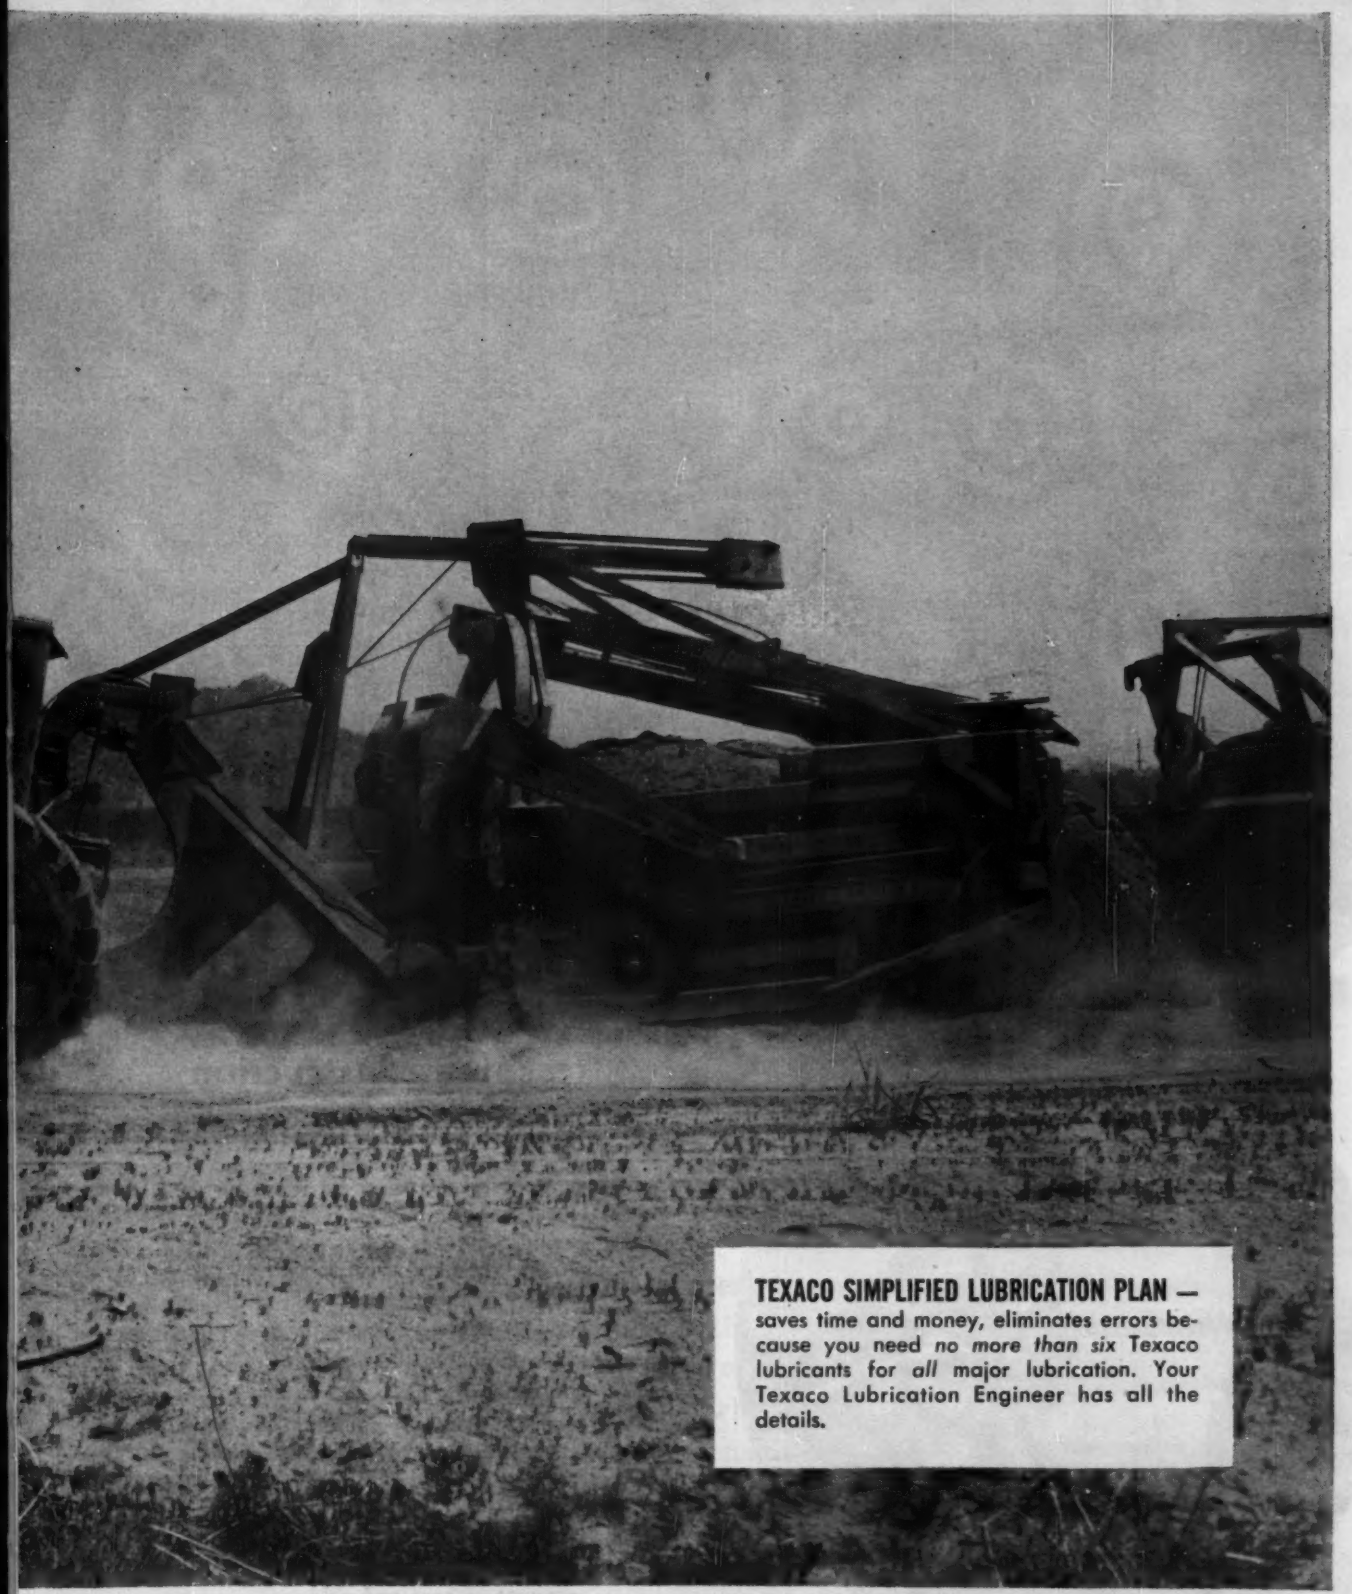

TEXACO SIMPLIFIED LUBRICATION PLAN — saves time and money, eliminates errors because you need *no more than six* Texaco lubricants for *all* major lubrication. Your Texaco Lubrication Engineer has all the details.

Lubricants and Fuels

FOR ALL CONTRACTORS' EQUIPMENT

NOW...*out of 250 million hours of flight experience*

A NEW AIR-COOLED INDUSTRIAL ENGINE

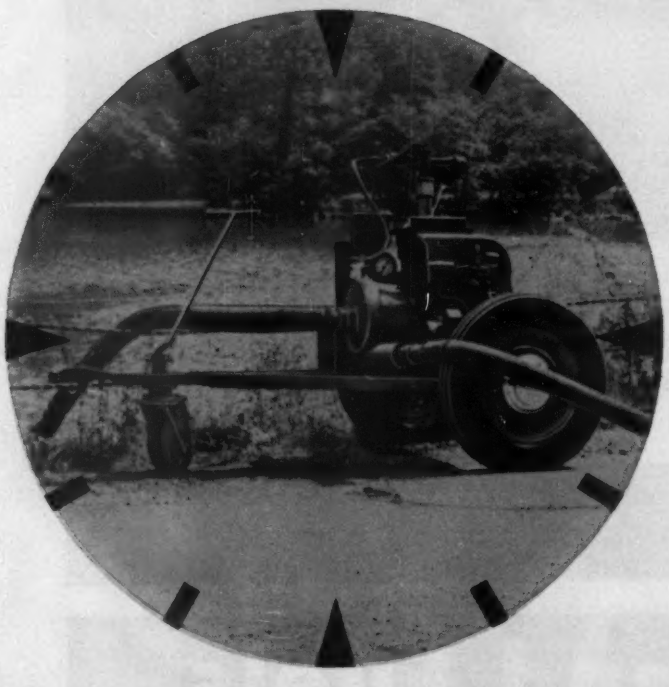

RUN FOR MORE THAN 1,600 CONTINUOUS HOURS! In Williamsport, Pa., this C2-90 was test-run in an actual pumping application for more than 1,600 hours continuously, without overhaul or any service except gas and oil. The engine is still in active service as a demonstrator.

Designed specifically to solve construction industry problems:

NEW! Reserve Power—C2-90's full-power rating provides a ready reserve for generators, pumps, pavers, crushers, mixers, etc.

NEW! Long Life—the C2-90 is a ruggedly built industrial engine specially designed to outlast any other engine on the market.

NEW! Cooling Design—to avoid overheating that comes with dust conditions, the C2-90 provides improved cooling surfaces, a cooling fan that operates through entire speed range, and pre-cleaners.

NEW! All-Weather Performance—the C2-90 advanced air-cooled design performs normally in extremes of heat and cold.

In addition, this short-stroke, oversquare engine has the advantage of modern, high-speed operating ranges.

Specifically designed construction equipment accessories are available: gear-driven hydraulic pump; front-end power take off; various power take-off adaptations, i.e., pulley drives and various reductions for engine and anti-engine rotation.

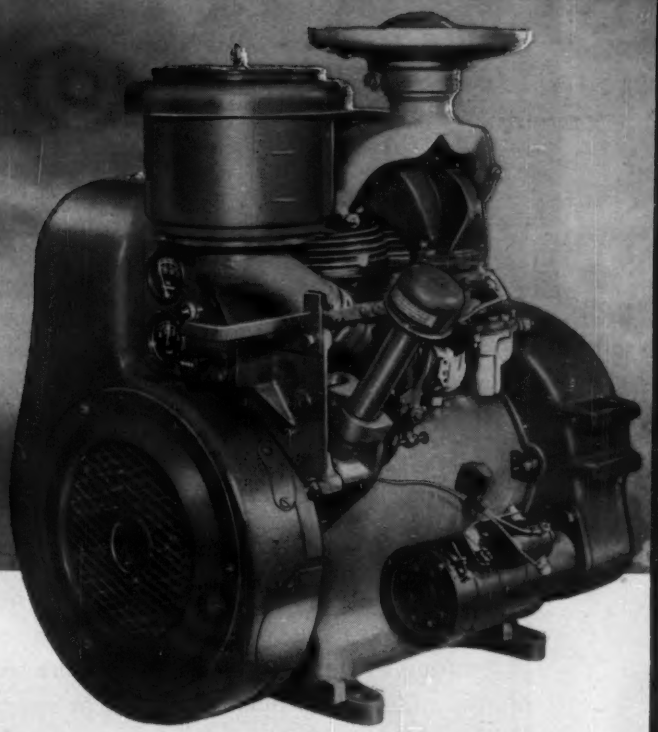

comes

THE FULL-POWER LYCOMING C2-90

Rated 30 h.p.! Delivers 30 h.p.!

The C2-90 is the result of a quarter century of aircraft experience . . . built to the same high standards that have made Lycoming a top name in engines for aircraft—which demand *absolute* dependability. That is why the C2-90 does just what we say it will do—works at *full power* under the most rugged conditions. So why buy an engine you have to de-rate (up to 50% for continual-duty service)? Here is an engine which continually delivers *full power!*

For more details write to Sales Engineering, Industrial Engines, Lycoming Division of AVCO, Williamsport, Pa.

SOON TO COME! New opposed twins, opposed 4's and V-4's for all applications up to 75 h.p.

LOOK TO Lycoming

DIVISION OF AVCO DEFENSE AND INDUSTRIAL PRODUCTS

LYCOMING • AVCO ADVANCED DEVELOPMENT • CROSLEY

POWER PLANTS • ELECTRONICS • AIR-FRAME COMPONENTS • PRECISION PARTS

YEOMANS presents

THE Cavitator* SYSTEM

for Municipal Waste Treatment

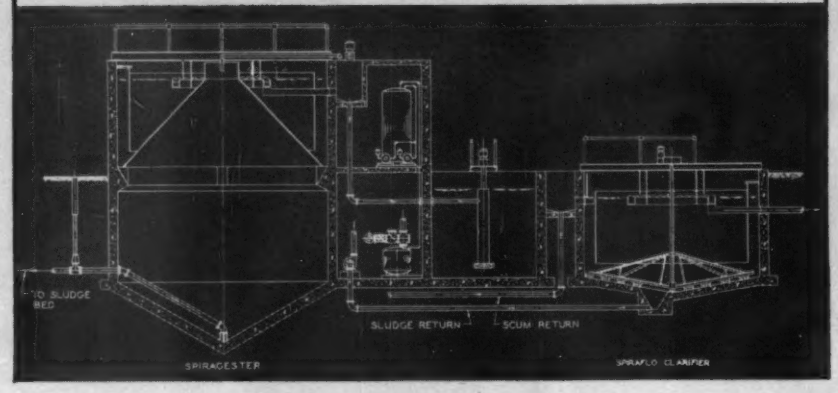

One of the many possible arrangements is illustrated. The secondary treatment is provided by the Cavitator mechanism, a specially designed rotor with two arms mounted on a hollow shaft through which air is drawn for dispersion through the tank contents. The arms are streamlined with the outer ends so constructed that when they are passed through the liquid at relatively high speeds they create a zone of cavitation through which the liquid is recirculated continuously. Air and liquid are drawn together creating a vapor pressure condition corresponding to cavitation with its tremendous forces. The oxygen is forced into the sewage and creates countless small air bubbles which permeate the entire liquid body.

- **high oxygen transfer efficiency**—requires only 135 cu. ft. of air per lb. B.O.D. removed per day in the Cavitator system.
- **exceptional performance on relatively low flows** with high B.O.D.
- **low installation and operating cost** with a high degree of purification.

Primary clarification and digestion is accomplished in a single structure, the Spiragester. A Spiraflo is used for clarification.

Secure detailed information. See your local Yeomans representative listed in the Yellow Pages of your telephone book under "Pumps" or contact factory direct.

*A Yeomans Trademark

YEOMANS BROTHERS COMPANY
1999-1 N. Ruby Street, Melrose Park, Illinois

Manufacturers of: Distributors • Clarifiers • Digesters • Mechanical Aerators
Pneumatic Sewage Ejectors • Centrifugal Pumps

READER COMMENT

Pozzolans in Concrete

SIR: In his letter (ENR August 4, p. 8), R. E. Lee, assistant civil engineer of the San Francisco Water Department, advocating a more widespread use of pozzolans, states that they may be substituted for as much as 50% of the cement in concrete, but assumes that 25% would be a more likely figure. Based on this figure the effects, he states, would be equivalent to increasing the monthly productive capacity of the cement industry by 5,000,000 bbl.

In order to obtain an equivalent productive capacity of this magnitude, it is first necessary to accept the premise that an average of 25% of portland cement used for all purposes may be arbitrarily replaced by pozzolanic material.

Mr. Lee refers to the publication by Prof. R. E. Davis as a source of information concerning the use of pozzolans, but a careful study of all the available literature on the use of pozzolanic material would indicate a degree of enthusiasm on the part of Mr. Lee that is not entirely warranted by the facts.

The Bureau of Reclamation has had considerable experience in the use of pozzolans, and in their Concrete Manual, Sixth Edition, 1955, point out that pozzolans are of various composition, with widely varying properties, some of which may introduce adverse qualities into the concrete.

Pozzolans are generally recognized as beneficial in reducing the heat of hydration in mass concrete, or controlling an alkali-aggregate reaction, but under certain conditions the cement content of a given mix may actually have to be increased beyond the amount necessary in a mix without pozzolanic material in order to maintain required strengths.

Our own investigation into the use of pozzolanic materials as a cement replacement indicates a reduction of strength at early ages, which would discourage their general use in structural concrete, particularly thin-wall sections where form-stripping and construction must proceed according to schedule.

Generally, concrete made with pozzolans requires more thorough curing than that without to obtain equivalent resistance to freezing and thawing, and there may be a higher incidence of shrinkage cracks in concrete made with the use of pozzolans.

In order to qualify as a substitute for cement it must be demonstrated

NOBLE-MOBILE

"Batching plant on wheels"

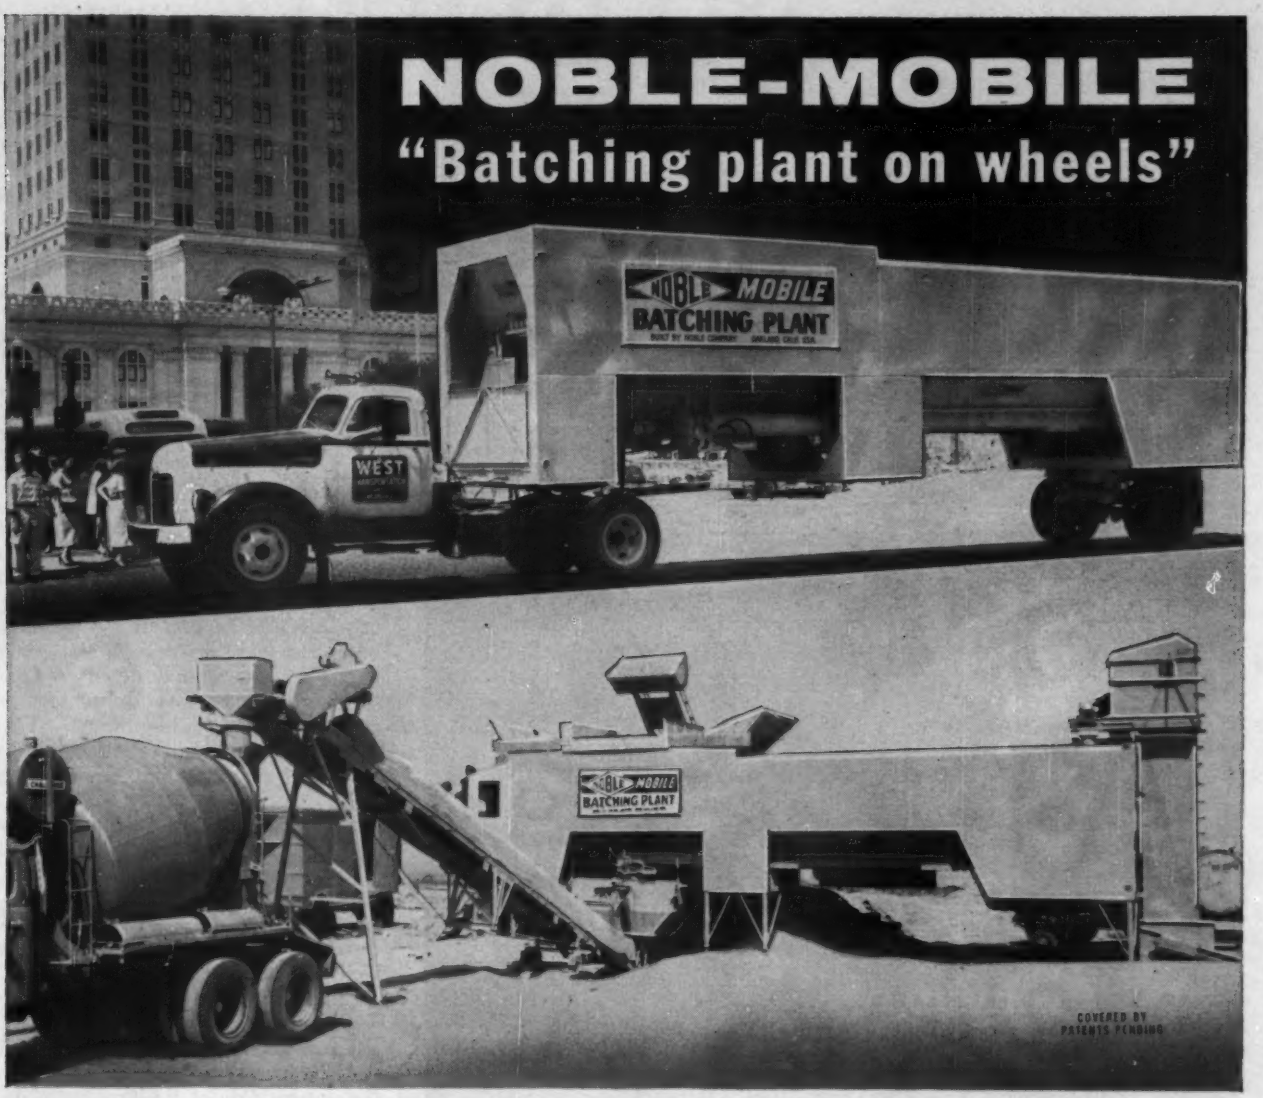

the complete plant that saves erection costs... drive it to the job site and start batching!

Noble-Mobile lets you batch at the job site proper where shorter hauls result in greater capacity. You go quickly into production . . . no footings, crane or electrical wiring required.

Noble-Mobile utilizes bulk cement. Aggregates charged with scooploader, conveyor or clam-shell. 60 yards per hour or more output to truck mixers. Noble-Mobile drives the highways within legal limits. No special permit required.

NOBLE BATCHING PLANTS

Noble-Mobile


Portable or semi-portable plants


High capacity stationary plants

• *DESIGNERS AND BUILDERS* •

For further details phone, write or wire **NOBLE COMPANY**

1860 7th Street, Oakland 20, California, TEmplebar 2-5785 • 20950 Center Ridge Road, Cleveland 16, Ohio, EDison 1-3426

There's one way to be sure when you specify plywood for form work . . .
LOOK FOR THE DFPA* TRADEMARK!
DFPA TESTED QUALITY
When you specify grade-trademarked fir plywood, you're sure of material manufactured under the rigid industry quality control program and independently quality-tested by DFPA* to protect the buyer. Here are grades expressly made for form work:
1. INTERIOR PLYFORM — made with highly moisture resistant glue for multiple concrete form re-use.
2. EXTERIOR PLYFORM — made with waterproof glue for maximum form re-use.
3. OVERLAID PLYWOOD — glossy, smooth, tough resin-fiber surface fused to Exterior plywood. Gives greatest re-use plus smoothest concrete. EXT-DFPA* on panel means 100% waterproof glue.
EXT-DFPA
*DFPA — Douglas Fir Plywood Association, Tacoma, Wash. is a non-profit industry organization devoted to product research, promotion and quality maintenance.

READER COMMENT

that the end product is equivalent or better than a comparable mixture without pozzolan, and that equivalent strength and durability are obtained at comparable ages.

The uses of pozzolans are not always entirely beneficial, and the adaptability for a particular use should most certainly be carefully investigated before arbitrarily using them as a cement replacement.

ELLIOT A. HALLER, PRESIDENT
The Haller Testing Laboratories, Inc.
New York, N. Y.

George Did It

SIR: ENGINEERING NEWS-RECORD of July 28, 1955 has on pages 45-46 a well deserved article concerning veteran contractor Henry George. The article would have been a little more complete had the construction of a complete naval supply depot by Clifton & Applegate and Henry George in 1942-43 been mentioned. This depot was built for about $9,000,000 which was about $1,500,000 less than estimated costs.

The construction included over 2,000,000 sq ft of covered space, with all utilities, roads and paved streets, yard and access railroad tracks, central heating, storm and domestic sewer system, sewage disposal plant, water wells and tank. It also included shops, administrative buildings, cafeteria, marine barracks, and residences for key officers, and complete fencing with gatehouse. While the nine months for construction of the Spokane Coliseum is indeed excellent, attention is invited to the fact that in 1942 the above mentioned contractors had a complete supply depot ready for use in less than six months after field work was started, and the entire job was completed in nine months except for a portion of the central heating plant, which did not cause any inconvenience for temporary heating installations were provided during interim.

V. J. ENGLUND
Supervisory Engineer
Naval Supply Depot
Spokane, Washington

CALENDAR

New England Water Works Association, Lake Placid Club, Lake Placid, N. Y., Sept. 18-22.

International Road Congress, Dolmabahce and Yilditz Palaces, Istanbul, Turkey, Sept. 26-Oct. 16.

Building Research Institute, conference on metal curtain walls, National Academy of Sciences, Washington, D. C., Sept. 28-29.

American Public Works Association, congress and equipment show, Milwaukee, Wis., Oct. 2-5.

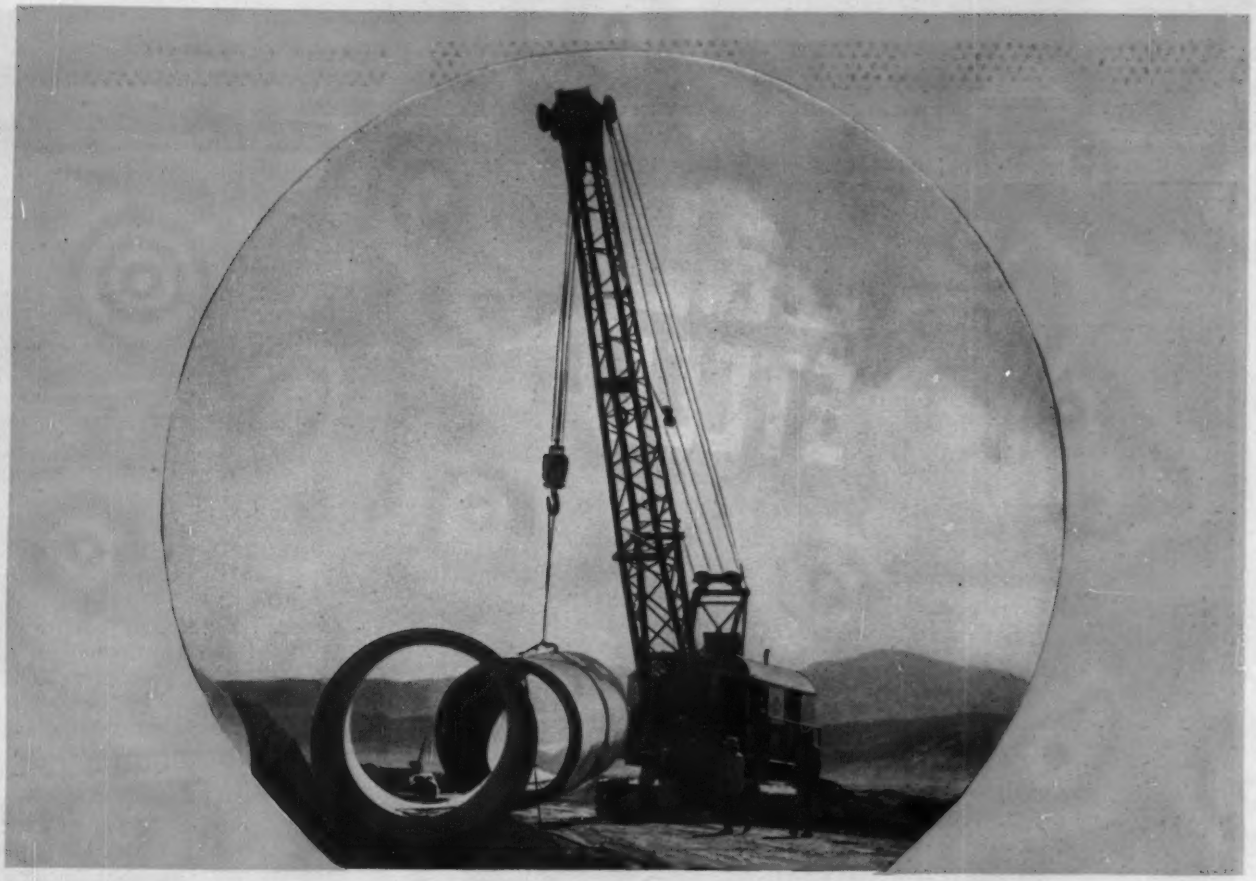

concrete pipes are bound to last longer when reinforced with

CF&I CLINTON WELDED WIRE FABRIC

Concrete pipes subjected to heavy loads, when used as highway drainage culverts, sewer pipes and high pressure water systems, must have superior structural strength to give dependable service with lower maintenance cost.

When you specify concrete pipes reinforced with Clinton Welded Wire Fabric, you make a sound investment in permanent installations. When reinforced with this rugged steel wire mesh they have maximum strength and durability. In addition, their smooth walls assure uninterrupted, clog-free flow.

Clinton Welded Wire Fabric meets all A.S.T.M. specifications and is supplied in a wide variety of gauges and spacings for every requirement.

For complete information, write or phone our nearest district sales office.

CLINTON
WELDED WIRE FABRIC
THE COLORADO FUEL AND IRON CORPORATION
CF&I

3177

THE COLORADO FUEL AND IRON CORPORATION—Albuquerque • Amarillo • Billings • Boise • Butte • Casper • Denver • El Paso • Ft. Worth • Houston • Lincoln (Neb.) Los Angeles • Oakland • Oklahoma City • Phoenix • Portland • Pueblo • Salt Lake City • San Francisco • Seattle • Spokane • Wichita • WICKWIRE SPENCER STEEL DIVISION—Atlanta • Boston • Buffalo • Chicago • Detroit • New Orleans • New York • Philadelphia • CANADIAN REPRESENTATIVES AT: Calgary • Edmonton • Toronto • Vancouver • Winnipeg

J&L
STEEL

School Builders:

Here's a Fitness Report on J&L Junior Beams

In 3 Years Architect D. Clarence Wilson used lightweight J&L Structurals in functional, low-cost design at 33 New Southern Illinois Schools

"Junior Beams . . . a good choice to keep material and handling costs to a minimum." — D. Clarence Wilson

Repeated use often provides the best evidence of how well a product performs. That's why J&L is proud of the record being established by lightweight J&L Junior Beams in Southern Illinois. Architect D. Clarence Wilson of Mt. Vernon first specified Junior Beams for the $800,000.00 Nashville High School, Nashville, Illinois in 1953. Since then Mr. Wilson has designed 33 schools ranging from the $80,000.00 Petty District Elementary School to the $975,000.00 Greenville High School at Greenville, Illinois.

In every one, J&L Junior Beam roof purlins have been specified. The reason as stated by Mr. Wilson, "Today's school must not only be attractive, functional, permanent and safe . . . it must also be economical to build. Junior Beams have proved a good choice to keep material and handling costs to a minimum."

Mr. Wilson's experience with Junior Beams is being shared by more and more cost conscious builders every day.

If you're engaged in light occupancy construction, you'll find Junior Beams offer you a really versatile, flexible structural member.

Write today for our new booklet covering J&L Junior Beams. It shows how Junior Beams are used as floor joists and roof purlins with typical end connections and loading and spacing tables for various spans.

Jones & Laughlin
STEEL CORPORATION — *Pittsburgh*

J&L STEEL

Jones & Laughlin Steel Corporation
428 Gateway Center • Pittsburgh 30, Pennsylvania

Please send me a free copy of your booklet, "J&L Junior Beams—the Lightest Hot Rolled Steel Structural."

Name_____

Company_____

Address_____

see our catalog in
ARCHITECTURAL FILE
or write for copy

GMC'S NEW BLUE CHIP MODEL MW620-42 (at right) gets the power to hustle extra-hefty loads over tough terrain from a rugged 190-h.p. truck engine. Twin Hydra-Matic Drive eliminates shifting effort—protects engine, axle and drive-line. The MW620 has a new 34,000 lb. capacity tandem axle—is rated for 42,000 GVW-65,000 GCW work. The GMC M500 awaiting its turn at left is a two-axle model powered by a 155-h.p. engine that's teamed with 8-speed Hydra-Matic. It's rated at 24,000 GVW.

They've got the bigger "muscles" a construction hauler needs

THEY'RE even brawnier than they look—the 19 rugged new tandem-axle jobs spanning the 28,000 GVW-90,000 GCW range in GMC's great new Blue Chip line.

Their frames, for example, are of a unique new design that builds in super-stamina. If your operation is unusually severe, full-length reinforcements* can be installed right at the factory. There are new extra-capacity axles—front and rear.

And the big choice of power plants—gasoline or Diesel—155 to 230 h.p.—can swing a lot more work with their high torque output—do it faster and with less strain. When time and tonnage are closing in on you their reserve power makes the big difference.

Bigger Clutches, Too

New 2-plate 14-inch clutches give you up to 76% greater working surface—prolonging clutch-life and making shifting easier. Or you can eliminate all clutch-and-shift work—and all clutch repairs as well—with any of the 9 new Hydra-Matic models.

In all 19, you can have Safety Power Steering* to help drivers with the tough going. And every one of them has the kind of rims-to-roof ruggedness that makes down-times fewer and farther between—truck-life longer and more profitable.

In this big range of models, there's sure to be one made to order for your job. Check on it at your GMC dealer's today!

**Optional at extra cost*

See GM Diesels at work at the

General Motors Powerama

Lake Shore Drive, next to Soldier Field, Chicago

August 31 through September 25

GMC TRUCK & COACH—*A General Motors Division*

PLYMOUTH *PUSHES LIKE IT PULLS . . .*

POWERFULLY!

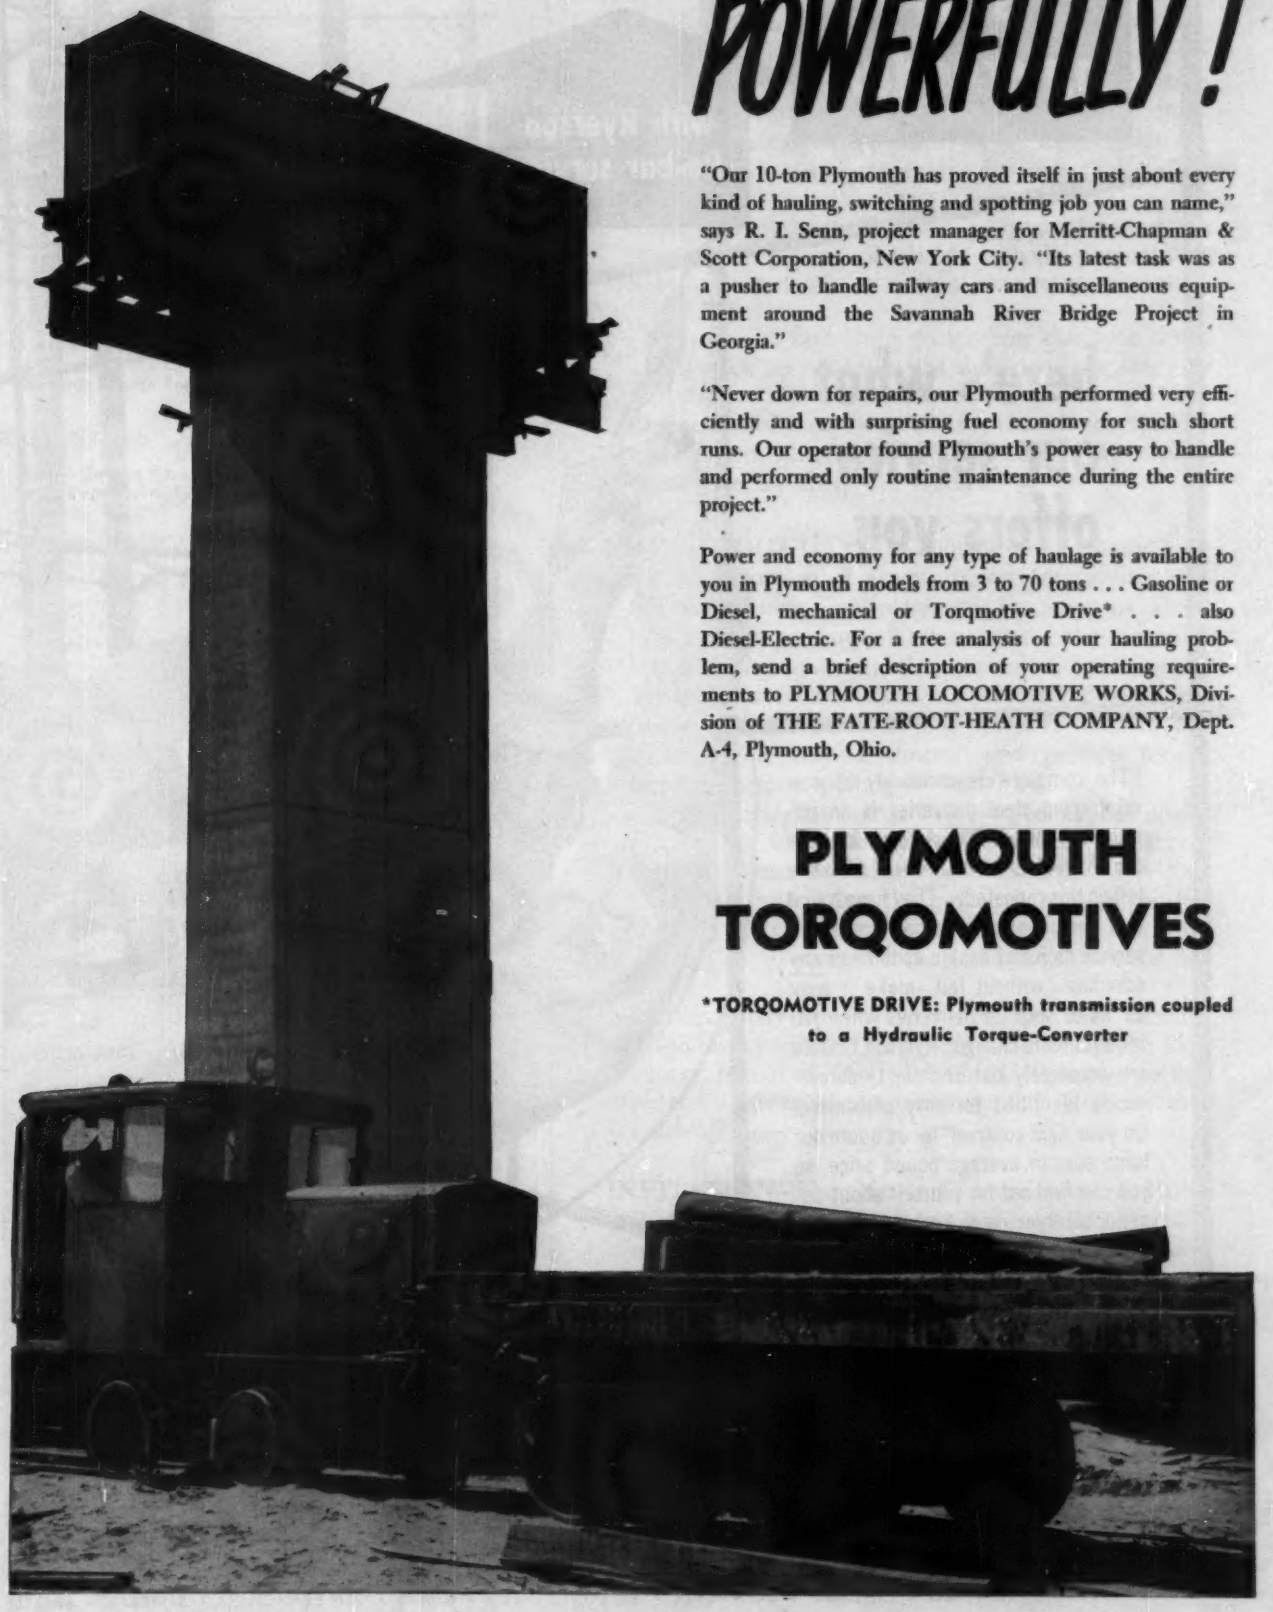

"Our 10-ton Plymouth has proved itself in just about every kind of hauling, switching and spotting job you can name," says R. I. Senn, project manager for Merritt-Chapman & Scott Corporation, New York City. "Its latest task was as a pusher to handle railway cars and miscellaneous equipment around the Savannah River Bridge Project in Georgia."

"Never down for repairs, our Plymouth performed very efficiently and with surprising fuel economy for such short runs. Our operator found Plymouth's power easy to handle and performed only routine maintenance during the entire project."

Power and economy for any type of haulage is available to you in Plymouth models from 3 to 70 tons . . . Gasoline or Diesel, mechanical or Torqmotive Drive* . . . also Diesel-Electric. For a free analysis of your hauling problem, send a brief description of your operating requirements to PLYMOUTH LOCOMOTIVE WORKS, Division of THE FATE-ROOT-HEATH COMPANY, Dept. A-4, Plymouth, Ohio.

PLYMOUTH TORQOMOTIVES

***TORQOMOTIVE DRIVE: Plymouth transmission coupled to a Hydraulic Torque-Converter**

here's what our service offers you

"The complete dependability of your reinforcing steel deliveries is an important factor." Contractors who have completed jobs on or ahead of schedule tell us this repeatedly. They have found that our unequalled re-bar stocks and service facilities enable us to meet any schedule—without fail—make it easy for us to step up deliveries when job requirements change. Ryerson re-bars are accurately cut and bent; permanently identified for easy placement. On your next contract, let us quote our lump sum or average pound price, so you can find out for yourself about dependable Ryerson re-bar service.

in stock

Re-bars & Accessories
Spirals, Wire Mesh
Open Web Joists
Caisson Rings
Expanded Metal
Grating, Treads,
4-WAY Safety Plate,
Structurals, etc.

RYERSON STEEL

JOSEPH T. RYERSON & SON, INC. PLANTS AT: NEW YORK • BOSTON • PHILADELPHIA • CHARLOTTE, N. C. • CINCINNATI • CLEVELAND
DETROIT • PITTSBURGH • BUFFALO • CHICAGO • MILWAUKEE • ST. LOUIS • LOS ANGELES • SAN FRANCISCO • SPOKANE • SEATTLE

ENGINEERING NEWS-RECORD

Vol. 155, No. 10 September 8, 1955

Number of copies printed this issue, 68,441

INDEX

NATIONAL AFFAIRS

How Good Are the Graduates? ... 21
Federal Construction Upturn ... 21
Pelican Island Development Assured ... 23
Traffic Solution: City Urged to Build Four River Bridges ... 24
Flood Sequel: Planners Recruited to Guide Reconstruction Programs ... 24
Wandering Mississippi to Be Curbed ... 25
A Boost for Highway Engineer Teaching ... 26
Military Services Embark on $1 Billion Expansion ... 30
Sewerage Works Program Costing $15 Million ... 32

FEATURES

How to Build a Beach at Economy Prices ... 34
Small Dam Proves to Be No Small Job ... 43

NEW PRODUCTS

Analyzer Can Cut Anti-Freeze Costs ... 50
New Instrument Can Be an Aid in Designing Highways ... 51
Inorganic Coating Makes Possible "Cold Galvanizing" ... 51

INTERNATIONAL

Office Building Puts Electricity to Use ... 52
Hong Kong in the Midst of "Skyscraper" Building Boom ... 53

MEN AND JOBS

Fluor Corp. Announces Organizational Change ... 54
Joint Venture to Assist U. S. Air Force in England ... 54
Adm. Karo Is New Director Coast and Geodetic Survey ... 55
Engineering Firm Elects New Officer ... 55
Reclamation Bureau Names Members of Project Staff ... 56

BUSINESS AND FINANCE

August Contract Awards: The Pace Eases Up ... 75
Cost Indexes Rise Slightly Due to Lumber, Wage Hikes 76
Pennsylvania Turnpike Pushes Plans for New Extensions ... 76
Activity This Week ... 77

LABOR

"United We Stand" Is Theme for Labor Day ... 80
Unions Must Pay for Illegal Strike Losses ... 80
NLRB Warned by Court in Confined Picketing Case. 82
More Boosts Here and There ... 82

Reader Comment ... 8
Calendar ... 10
Washington Observer ... 19
Legal ... 57
Construction Reports ... 58
Material Prices ... 68
Scoreboard ... 74
Editorials ... 96

Back issues of ENGINEERING NEWS-RECORD *are generally available for the previous six months. Price 35¢ each copy except Annual Cost Issue. Semi-annual indexes will be sent on request.* ENGINEERING NEWS-RECORD *is also indexed in Industrial Arts Index and Engineering Index.*

THE CONSTRUCTION WEEK

A FAVORITE TOPIC—Criticizing engineering education has come to be almost a favorite pastime of late, with most critics tending to decry the inadequacy of today's schooling as measured against present needs of the profession. The criticism to be taken most seriously has come from employers of recent graduates—but just how prevalent is their dissatisfaction on this subject?

An ENR spot check shows a representative group of employers pretty well satisfied with the product that is being turned out by today's engineering education (Page 21.).

It would be interesting to see how this spot check would stack up against a real thoroughgoing study of the problem. With the American Society of Civil Engineers dickering hopefully for the wherewithal for such research, there's new significance in what employers have to say about our schools.

NOT YET OUT-DATED—Though developments leading to realization of atomic power are moving at a fast pace, there's no reason to be reluctant about hydro power ventures. At least, that's the assurance the AEC has given to the Bureau of Reclamation. Three of its 10 new starts in the current fiscal year (pages 21 and 22) will include power facilities as will eight of the Army Engineers' new projects for an ultimate output totaling 1,436,000 kw.

Commenting on the AEC's assurance that new hydro projects are in no danger of becoming obsolete in their lifetime, Reclamation Commissioner Wilbur Dexheimer noted that the bureau is required by law to have power phases of its projects pay out, with interest, in 50 years—which is shorter than their life span.

"No matter how cheap a new fuel may become, hydro power will still fill a need," Commissioner Dexheimer remarked. And, he added, "You can utilize water for power whenever you want it. You just turn a valve."

INVITATION—The National Association of Home Builders has decided to test the so-called "Geneva spirit" by extending an invitation for Soviet housing experts to visit the U. S.

NAHB would like to have Russian guests on hand for dedication of its new National Housing Center in Washington on Oct. 3, if possible. The center—which will become a reservoir of information on American homebuilding design and construction techniques—would serve as a good jumping off point for a proposed tour of homebuilding operations that would include a dozen cities. The Russian visitors also would be given an opportunity to visit plants that manufacture building materials.

WROUGHT IRON PUTS A STOP TO CORROSION ON THE NEW JERSEY TURNPIKE

CORROSION-RESISTANT WROUGHT IRON USED FOR BLAST PLATES, DRAINAGE LINES, ELECTRICAL CONDUIT

Premature failures from corrosion are brought to a stop on the 118-mile New Jersey Turnpike. This designed-for-durability feature, plus the expressway's ability to accommodate future traffic demands, are two good reasons why this ultra-modern turnpike rates the honor, "A Highway for Tomorrow." An excellent example of the selective use of construction materials to assure continued operation is the extensive use of wrought iron.

Time-proved wrought iron blast plates are used to protect structures on all railroad crossings. Wrought iron conduit, over 120,000 feet of it, serves and safeguards the underground electrical power distribution systems for toll plazas, service areas, and utility buildings. And to assure long-life service in storm drainage lines, the designers applied the extra durability of wrought iron to this job in many of the sections.

Howard, Needles, Tammen and Bergendorff, N.Y., are General Consultants for the entire Turnpike Authority.

Our booklet, *Wrought Iron for Highway Construction*, defines the reasons for this material's unique ability to resist corrosion, and describes a variety of highway services where wrought iron has served and saved. Write for your copy.

A. M. Byers Company, Pittsburgh, Pa. Established 1864. Boston, New York, Philadelphia, Washington, Atlanta, Chicago, St. Louis, Houston, San Francisco. International Division: New York, N.Y.

Available throughout the world.

WHY WROUGHT IRON LASTS LONGER

Tiny threads of glass-like iron silicate, distributed through the body of high-purity iron, give wrought iron the unique structure which makes it highly corrosion resistant. These glass-like fibers—more than 250,000 to each cross-sectional square inch—discourage pitting and rapid penetration because they are immune to corrosive attack. They also anchor the initial protective scale, which shields the underlying metal.

BYERS

CORROSION COSTS YOU MORE THAN WROUGHT IRON

WROUGHT IRON

TUBULAR AND HOT ROLLED PRODUCTS

ELECTRIC FURNACE QUALITY STEEL PRODUCTS

WASHINGTON OBSERVER

Flood insurance is being pushed again by the federal government. Housing Chief Albert Cole will meet on Thursday with representatives of a half dozen insurance companies. The big problem: How to write flood coverage at rates that property owners can afford to pay.

Administration officials want to find a way of reducing the risk so that protection can be offered at a reasonable price. They are asking the companies to re-examine their positions on reinsuring the casualty companies on their flood liabilities, assuming a percentage of the risk, and spreading the risk among several hundred companies.

•

St. Lawrence Seaway tolls will be a bit higher than expected to cover the costs of navigation aids. This is the ruling of the Budget Bureau, which has given responsibility for constructing and maintaining navigation equipment to the St. Lawrence Seaway Corp. On other waterways in and around the U. S. shoreline, the U. S. Coast Guard does the job, and gets money from Congress to pay costs.

The Seaway Corp. will set its tolls to pay the costs. The aids will include lights, buoys and shore markers along the international section of the river, some 100 miles or so from Lake Ontario to below Massena, N. Y., the Coast Guard may end up doing the job, but as a private agent or subcontractor for the corporation, rather than as a public service agency.

•

Another round in the Hells Canyon Dam dispute is on. The National Hells Canyon Association seeks a rehearing from the Federal Power Commission, which on Aug. 4 announced award of licenses for three low dams to the Idaho Power Co. The association argues the FPC misconstrued the Federal Power Act in voting in favor of Idaho Power. The commission has 30 days in which to answer, and there is little doubt it will maintain its position and reject a rehearing. The proponents of the high dam say they will then take the issue to the U. S. Circuit Court of Appeals.

•

Contractors and their unions can agree to ban use of non-union goods on a job, but the unions can't enforce the contract.

That's the gist of a new National Labor Relations Board decision on "hot cargo" contracts. In the case before it, involving a Los Angeles AFL carpenters union and, Havstad and Jensen, the contractors, the NLRB said that union agents were acting illegally—under Taft-Hartley—when they told union men on the project not to install non-union doors.

The Taft-Hartley's ban on enforcement doesn't apply to employers. They can enforce their "hot cargo" agreements by not buying or installing the banned goods. But under board rulings, the union has to stay away from any enforcement actions.

A strike to enforce such a "hot cargo" clause is also illegal, the board has said in earlier cases.

•

The housing industry is a bit uneasy about the effects of new mortgage credit restrictions. The impact will show up in housing starts next spring—and present forecasts generally agree there may be a drop of from 50,000 to 100,000 as a result of the tougher rules on down payments and length of mortgages. Trouble will show among builders who had a small backlog of approved projects when the new FHA and VA rules went into effect on July 30. The builder who had a new project ready to go, and had got approval for the financing before the crackdown won't be hurt.

The reduction in starts will be in the cheaper housing market. Lower income families will be strapped to make the larger down payments. Interest rates and even the higher payments resulting from shortening mortgages from 30 years to 25 years will have little effect.

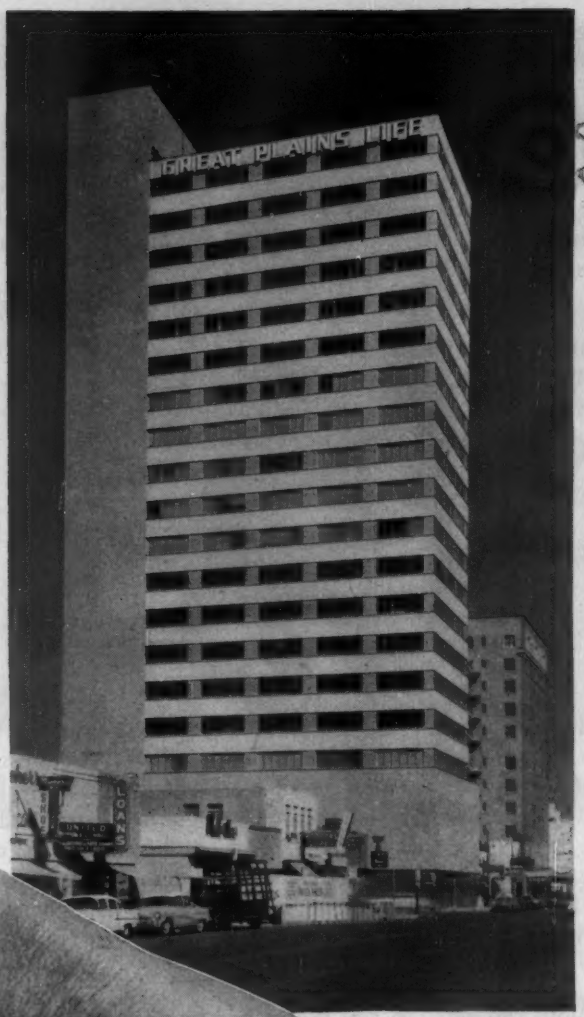

"It's Tops FOR ALL-AROUND MORTAR QUALITY"

...said the Masons, who used 1200 barrels of Lone Star Masonry Cement on this modern, 20-story office building in Lubbock, Texas, said to be the tallest between Fort Worth and Denver and El Paso and Oklahoma City.

Masons are always pleased when they see Lone Star Masonry Cement on the job. They go for its rich, smooth plasticity, the way it carries sand, the ease with which it works under the trowel and spreads to a smooth bed and full joint.

Contractors appreciate the economy of this ready-to-use masonry cement, which saves money because there is one less cementing material to handle, and assures greater uniformity, because there is one less variable in proportioning.

Designer and Owner appreciate the attractive appearance of weathertight walls, assured by the strength and soundness, low absorption, high water repellency and low shrinkage of this always-uniform Masonry Cement.

For it is Lone Star quality, through and through—and that means outstanding performance, every time!

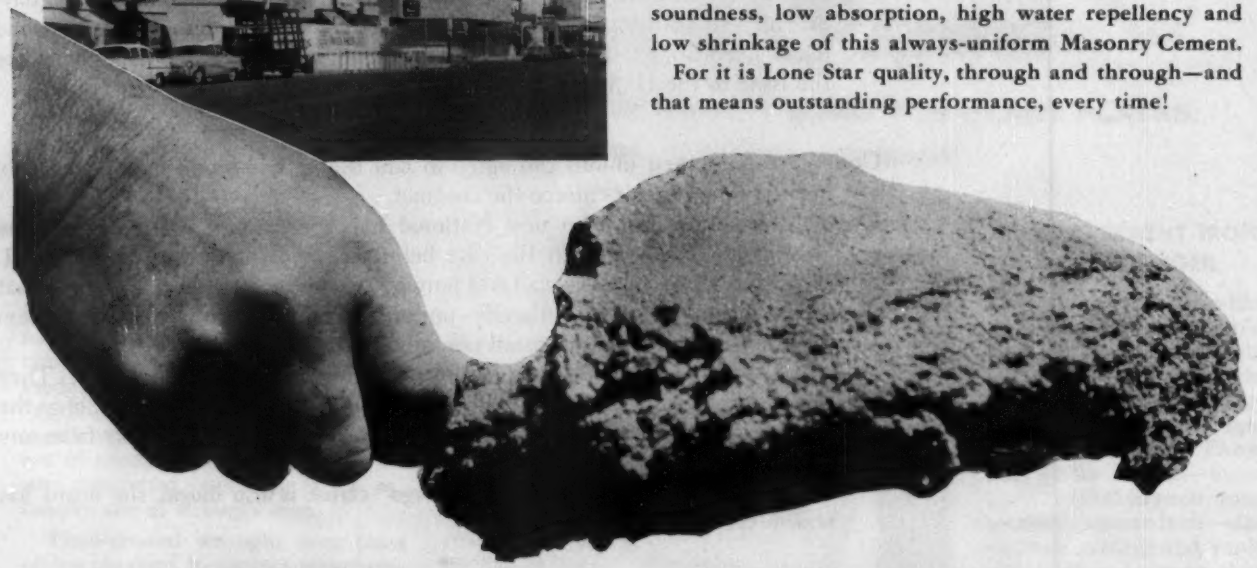

GREAT PLAINS LIFE INSURANCE BUILDING
General Contractor: **B M F P CONSTRUCTION CO.**
Architect: **DAVID S. CASTLE**, Abilene

Lone Star Masonry Cement from
LUBBOCK BUILDING PRODUCTS
—all of Lubbock, Texas, except as noted

LONE STAR CEMENTS COVER
THE ENTIRE CONSTRUCTION FIELD

LONE STAR CEMENT CORPORATION

Offices: ABILENE, TEX. • ALBANY, N. Y. • BETHLEHEM, PA.
BIRMINGHAM • BOSTON • CHICAGO • DALLAS • HOUSTON
INDIANAPOLIS • KANSAS CITY, MO. • NEW ORLEANS • NEW YORK
NORFOLK • PHILADELPHIA • RICHMOND • ST. LOUIS • WASHINGTON, D. C.

LONE STAR CEMENT, WITH ITS SUBSIDIARIES, IS ONE OF THE WORLD'S LARGEST CEMENT PRODUCERS: 18 MODERN MILLS, 141,600,000 SACKS ANNUAL CAPACITY

ENR Asks Employers:

How Good Are the Graduates?

Are the educators of engineers doing right by the employers of engineers? It's a question for almost constant discussion of late.

The pessimistic impression generally heard from educators, presumably exacted from employers, is that today's graduate of the engineering schools is not up to the tasks assigned to him.

Yet a spot check on the situation among some of the larger employers of inexperienced graduates indicates the opposite might be true. All firms responding to a survey by the ENR Research Department said they generally find today's engineering graduates capable of performing the work required of them.

The real answer is certainly not so definite, nor so simple. Indeed, some of the graduates feel they are capable of more advanced tasks. Perhaps the best conclusion to be drawn from all current criticism of engineering education, including ENR's findings, is that ASCE's proposed thorough-going study of the subject (ENR June 23, 1955, p. 23) is quite in order.

• **Employers give the answers**—ENR's spot check was prompted by the frequently-expressed observation that there is a gap between what engineering schools turn out and what employers of engineers expect. A series of questions was put to employers who were considered representative of consulting and contracting firms and public agencies. The firms were geographically dispersed and varied in size and specialty.

Here is a summary of the findings:

• The eleven organizations responding hired a total of 170 inexperienced graduates this year. About one-third were returning from the armed services.

• These green young graduates were put to work in the offices drafting and designing, with a few doing report writing and other office chores. In the field, the greatest number became instrumentmen, with inspectors and rodmen following in that order.

• In every case, responding employers indicated that they are assigning to the inexperienced employes tasks that call for as much—or more—knowledge than was required in former years.

• There was a 6 to 5 split on whether present graduates are as good draftsmen as those of the past. It was 7 to 4 favoring today's graduate as a surveyor. Employers said unanimously that today's graduate knows more about design and 6 of 11 said he is better trained in writing than previously.

• Asked how long it takes the inexperienced employe to begin to earn his keep, employers' answers varied from "no time at all" to about two years.

The majority of the employers said the break-in time is about the same as in previous years. But three said it is shorter today, and only one said the break-in time is longer than it was formerly.

• The respondent who said the nonproductive, in-service training period is longer today sponsors a formalized one-year training program. Only one other firm among the 11 respondents reported having such a program.

• **General satisfaction**—A request for general observations on the question of fitness of engineering graduates for their first jobs brought these varied comments:

"Standards generally good . . . varies with quality of schooling . . . well prepared for careers . . . need more basic training in fundamentals of self-expression, speaking and writing . . . judgment needs development . . . adjust quickly because of aggressiveness . . . show greater interest in pay, short hours, fringe benefit jobs."

While the answer to the key question in this small study (whether today's graduate is capable of the tasks assigned to him) was unanimously "yes," there remains the question of whether the tasks given to the recent graduate are properly selected to get the most out of today's engineering education.

Complaints about graduates are not hard to find. Neither are complaints from the graduates. Many of them feel they are capable of more than the demands of their early assignments. Such dissatisfactions may not prevail, but they do exist.

How far these dissatisfactions go, how serious they are and what might be done about them by revisions in engineering education: these are the questions still to be answered. And, there is indication now of increasing belief that the place to study the adequacy of engineering education—to find these answers—is not in the schoolroom, but in the office.

Federal Construction Upturn

Federal construction spending for the current fiscal year, ending June 30, 1956, will exceed the $5 billion estimated last January. Revised figures issued by the White House and the Budget Bureau now forecast a total of $5.33 billion in construction expenditures, an increase of $330 million over the estimate made early this year by President Eisenhower (ENR Jan. 20, p. 21).

This latest budget review predicts federal construction expenditures will run ahead of the January estimates in several categories including military public works, grants to federally affected school districts, natural resources, grants for federal-aid highways, and the Tennessee Valley Authority.

Other types of federally financed construction are expected to boom after this year, according to the Budget Bureau. One reason is that Congress has voted money to start a large number of new rivers and harbors, flood control and reclamation projects. Congress went far beyond the Administration's recommendations. The President asked for funds to start 41 projects; Congress voted initial funds for 109, with a total estimated cost of $1.8 billion.

Expenditures on the new projects will be comparatively small in the current fiscal year, but they will increase substantially in the following years.

• **Quick allocations**—The Budget Bureau has allocated funds for all the new starts included in the President's budget requests to Congress and in addition has made apportionments for all of the "unbudgeted" new starts requested by the various construction agencies.

The Reclamation Bureau received fund allocations for all 10 of its new starts early last month. The list included five projects that had not been included in the President's budget requests.

The Corps of Engineers also has re-

ceived speedy apportionment for every new start submitted, including the full list of budgeted items and all top-priority projects that were not budgeted, such as Tuttle Creek Dam in Kansas.

• **Other programs expand**—The budget review also noted other factors that favor a growth in federal construction spending, such as the $42-million additional grant-in-aid authority Congress voted for local airports (part of a four-year, $250-million program) and a $274-million increase in funds for urban renewal grants and for college housing and public works.

Projects and money available for new contracts during the fiscal year are more important to construction than the actual cash expenditures for the 12 months. Civil works projects, for example, are financed on a year-to-year basis by annual appropriations. A big contract for a civil works project can be awarded although there is only enough money on hand to pay the first year's bills.

Here is a rundown on appropriations for the major federal construction programs this year:

• **Military construction**—Because military construction is moving faster than was expected in January, estimated spending has been stepped up 8% in the current fiscal year. An estimated 500 projects are fully funded and eligible for contract award this year. The Air Force has the biggest program. It expects to let contracts for $1.2 billion in construction by June 30, 1956. This program will emphasize operational facilities such as runway improvements and bases. A close second in importance will be family housing, which will be a major program for all of the armed services.

• **Atomic Energy Commision**—AEC has an unobligated balance of $380 million that can be committed to new construction contracts this year. In addition, about $50 million in subcontracts will be awarded by prime contractors for AEC projects already under construction. AEC's total construction expenditures for the year may reach $500 million.

• **Army civil works**—Contracts for 97 new projects will be advertised. Construction spending during the year will exceed $400 million. New money available for construction totals about $445 million.

• **Reclamation**—Bids will be taken on 10 new starts with the first year's work to be financed out of appropriations included in the $150 million voted by Congress in the last session.

Here's complete tally of appropriations for construction in fiscal year 1956

	In millions of dollars		
	Fiscal '54	Fiscal '55	Fiscal '56
ALL CONSTRUCTION	$2,159.4†	$2,730.1†	$4,090.9
MILITARY CONSTRUCTION			
Air Force—airbase construction	240.8	630.0	994.3
Army—military bases	0.0	.....	485.1
Civilian components	9.1	15.0	31.6
Navy—Bureau of Yards and Docks	0.0	98.0	442.6
Civilian components	30.0	15.0	28.0
Secretary of Defense—military const.	0.0	88.5#	2.3**
CIA—new building	.....	.....	5.5
ARMY CIVIL FUNCTIONS			
Rivers and harbors & flood control	278.7	306.4	406.7
Mississippi R. flood control	51.4	45.5	52.0
Other civil functions	2.8	4.7	8.3
INDEPENDENT OFFICES			
Atomic Energy Commission	166.0	110.9	256.3
TVA	183.4	120.0	.....
VA hospitals	38.7	50.5	33.9
NACA	11.4	4.6	12.6
HHFA slum clear & urban redevelop.	20.0	40.0	55.0
Defense Housing	0.0	(4.5)*	.....
GSA—lease purchase design & plan	.....	.....	15.0
American Battle Monuments	8.5	3.5	3.0
Smithsonian Inst.—bldg. plans	.....	.....	2.3
INTERIOR			
Reclamation	116.3	132.0	151.1
Bonneville Power Adm.	38.9	24.3	14.6
Alaska—public works	12.0	9.5	3.0
Roads	14.6	8.0	6.3
Railroad	8.8	2.9	4.1
Virgin Is.—public works	1.0	.....	.....
Bureau Indian Affairs	15.9	14.6	8.0
National Park Service	15.4	14.3	34.0
Other Interior	30.6	34.5	8.4
COMMERCE—BUREAU PUBLIC ROADS			
Federal aid highways	530.0	595.0	640.0
Forest highways	15.0	18.5	21.8
Access roads	5.5	.....	.....
Grade crossing elimination	2.2	.....	.....
Public lands highways	1.8	0.9	2.0
Inter-American Highway	1.0	5.8	63.0
Rama Road, Nicaragua	1.0	1.0	2.0
COMMERCE—CAA			
Federal aid airports	22.7	22.0	27.5
Washington Nat'l Airport	0.4	0.0	3.1
COMMERCE—Other	1.2	0.1	2.8
HEALTH, EDUCATION & WELFARE			
Hospital construction	84.7	96.0	111.0
School construction	125.0	118.5	24.0
Other	4.4	6.6	15.0
AGRICULTURE			
Forest roads and trails	14.5	22.5	.....
Flood control	5.0	7.5	10.0
Watershed protection	.....	7.2	12.0
Other	.....	1.8	0.3
STATE			
State Dept building	.....	.....	1.0
Internat'l Boundary & Water Comm.	6.6	0.3	.....
JUSTICE			
Federal Prison System	0.2	0.0	0.9
LEGISLATURE			
Capital architect	1.0	12.6	18.5
DISTRICT OF COLUMBIA	28.8	39.9	35.0

† Figures don't add up because of rounding; fiscal '55 total includes second supplemental appropriation.
# Incl $75 mil. housing; $13.5 mil. access roads
* Cutback. ** Access roads.

Pelican Island Development Assured

First contract is let for Galveston crossing, a prerequisite for initiating work on $30-million industrial community

Award of a contract in July for Stage I of the work on a bridge to connect Galveston Island in Texas with Pelican Island opened the way for a start on a $30-million project for industrial and residential development of Pelican Island.

Under an agreement between the city of Galveston and the Pelican Island Development Corp., the latter could not start its work until a contract had been let for a major part of the bridgework.

Pelican Island lies north of the Galveston Ship Channel. It is an almost barren area, its sole industry being the shipyard of the Todd Shipbuilding Corp. The first phase of work planned there by the developers is filling an area of 1,200 acres to 10 ft above sea level. This will require dredging 3,000,000 cu yd from outside the harbor line, which in turn will provide a deep channel to the Intracoastal Waterway at the northern tip of the island.

The dredged channel will make available additional deepwater frontage for industrial sites, a barge terminal and yacht basins.

The first phase work also includes a paved highway from the bridge terminus to the northwest corner of the Todd leasehold along the route of a projected six-lane highway to serve heavy industries on that side of the ship channel.

• **Dual-purpose bridge** – The bridge and causeway connecting the two islands will be 8,400 ft long. It will carry a two-lane highway and a single-track rail line. Included will be a reinforced-concrete trestle 2,100 ft long over railroad yards at 51st St. in Galveston.

The water crossing will consist of 3,100 ft of hydraulically placed embankment retained by sheetpiling, 2,100 ft of prestressed-concrete trestle, 900 ft of a steel-girder trestle, and a 200-ft single-leaf bascule bridge at the navigation channel.

Spans in the highway section of the concrete work will be 50 ft, and 25 ft under the railway tracks. Span lengths for the steel girders will be 102 ft.

Prestressed concrete stringers are to be used in the highway spans of the bridge, and hollow prestressed-concrete slabs to support the railway track. Both will be carried on bents formed of 24-in. prestressed-concrete piles capped by beams of the same material.

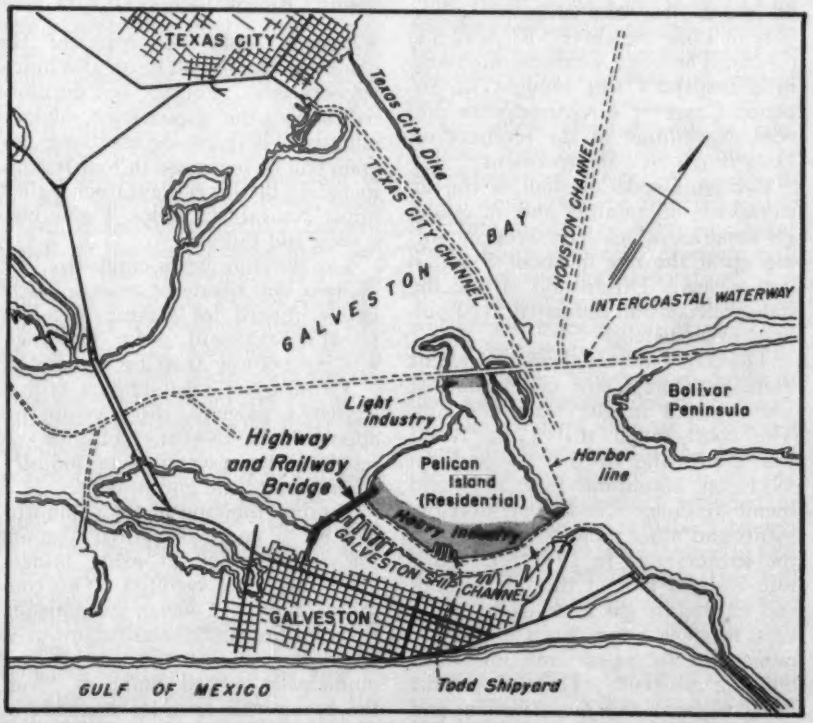

A BRIDGE to connect Galveston with Pelican Island for railway and highway traffic is the first step in a development program for the latter.

The bridge work is divided into three contracts, the first of which has been let to the Farnsworth & Chambers Co. of Houston for about $3 million. It includes the hydraulic embankment and the reinforced concrete trestle sections complete, the piers for the steel trestle portion, and the main pier for the bascule bridge up to Elev. 10. The bridge fender system is also included.

Contract 2 contemplates the completion of all the remaining superstructure work within the limits of Contract 1 and provides for completion of the steel girder trestles, completion of the main bascule bridge pier, and the bascule bridge span.

Contract 3 includes the complete reinforced concrete trestle crossing of the railroad yards.

This bridge is being built by Galveston County Navigation District No. 1, with Parsons, Brinckerhoff, Hall & Macdonald, New York, as consulting engineer. A. Bahn, Jr., is resident engineer.

Additional construction planned by the Pelican Island Development Corp. includes water and sewer connections to Galveston Island, an adequate source of industrial water, and construction of the rail line, first to the Todd shipyard and ultimately to the east end of the island to serve the area assigned to heavy industries. Streets, power lines and shopping centers for the residential area also are planned.

Engineers for the Pelican Island Development Corp. are the Southern Engineering Co. & Associates, Houston, Texas.

Contract for Seaway Lock Goes to Canadian Combine

A $7.1-million contract for construction of Cote Ste. Catherine Lock and approaches in the Lachine Section of the St. Lawrence Seaway has been awarded to joint venturers Canamont Construction Ltd. and Canit Construction Ltd. The work is to be completed by July 31, 1958.

Cote Ste. Catherine Lock is one of the two locks to be constructed on the river's south shore in the Lachine Section, just upstream from Montreal. Bids will be asked shortly on the other one, at St. Lambert.

The present contract in addition to construction of the lock includes excavation of a navigation channel and construction of dikes to form approaches to the lock. It includes excavation of a turning basin downstream of the lock, construction of regulating works for the control of the water level of the upper reach of the canal and formation of a reservoir pool upstream of the lock.

Traffic Solution

Louisville urged to build four Ohio River Bridges, downtown expressway loop

A sweeping program of traffic improvements, including four new Ohio River bridges and a downtown expressway loop, have been recommended as the solution to Louisville's traffic problems for the next 25 years.

The recommendations were made by Harland Bartholomew & Associates St. Louis planning firm, as part of its three-year $173,000 study of Louisville and Jefferson County.

No price tag was placed on the program. But the planners admit that many of the projects must be regarded as long-range goals and will require state and federal aid.

Major recommendations are:

- An expressway loop around the central business district. It would carry through-traffic, which now accounts for more than half of the downtown vehicular traffic, around the busy office and shopping center.
- Two new Ohio River bridges, two more in the future. Top priority is given to a span that would extend from the proposed Campbell St. Expressway to Jeffersonville. Next on the list is a bridge that would run from about 34th St. to New Albany. The two other bridges, to be built later, would be located at the western and eastern ends of extensions of the Henry Watterson Expressway.
- Two new expressways and two new parkways extending out from the downtown loop. One expressway would go west to the proposed New Albany bridge. The other would run south to Shively. The report urged review of a proposed Seneca Parkway to serve the eastern suburban area. It also suggested a Beargrass Valley Parkway to run southeast to connect with the Henry Watterson Expressway.
- Numerous new streets and roads, both inside Louisville, and out in the country. These would connect existing thoroughfares in new arterial routes.
- Numerous street widenings, overpasses and underpasses.

The firm also called for a drastic change in plans for the north-south expressway, on which construction is to start soon. This artery has been planned to start at the Henry Watterson Expressway and run north to the Ohio River in downtown Louisville, connecting it with Clark Bridge. But the report proposes that the expressway terminate at Chestnut St. and connect with the southern leg of the downtown loop. Through traffic then could use the loop to reach either of the two proposed new bridges.

Probably the most controversial phase of the report is that dealing with the bridges to Jeffersonville and New Albany. Bartholomew terms the Jeffersonville bridge as most needed. The Louisville Bridge commission, however, plans to build a crossing to New Albany first. It seems certain that the New Albany bridge will go up first since the governors of Indiana and Kentucky are expected to sign a contract soon for its construction.

Meanwhile, Kentucky highway officials have agreed to seek federal approval for making Watterson Expressway 6 lanes wide from Preston to Crittenden Drive. The section is now being built 4 lanes wide. But the State Fair Board has asked that Phillips Lane be closed at the expressway approach to the new state fairgrounds. In this case, the additional expressway lanes would be needed to accommodate dislocated local traffic. Federal approval is needed for this change in plan since the U.S. Bureau of Public Roads is putting up funds for the expressway.

California Stakes Its Claim To Tideland Oil, Gas Funds

The State of California has sued for possession of $100 million in accumulated tideland oil and gas royalties.

The State Attorney has filed a petition of intervention in the legal battle over dispensation of tideland oil and gas royalties collected by the City of Long Beach (ENR, April 14, p. 28). The state wants to intervene in a taxpayer's suit brought in Superior Court in Los Angeles to prevent expenditure of the revenues on Long Beach civic improvement.

California seeks one-half of the accumulated oil royalties and all of the gas royalties, which have been mounting up at the rate of about $34 million a year. This would enrich the state coffers by an estimated $100 million immediately.

The state bases its claim on a recent State Supreme Court clarification of law involved in the taxpayer's suit. The court noted that Long Beach was given title to the tidelands in 1911 on condition that it would spend revenues on harbor developments and other projects of benefit to the entire state. In 1951 the legislature released half of the oil revenues and all the dry gas revenues for other uses, to allow Long Beach to use the money for its $40-million municipal building program. This, the court held, violated the Constitution and funds released from the original purpose should revert to the state.

Flood Sequel

City planners recruited to guide reconstruction programs in Connecticut

Connecticut will attempt to recruit some of the nation's top community planners and bring them to the state to help disaster-stricken towns in their rebuilding efforts.

The plan, announced by Gov. Abraham A. Ribicoff, was launched last week when Frederick P. Clark, of Rye, N. Y., a planning consultant, was retained. He will help obtain other planners.

Services of the planners will be provided at no cost to the flood-devastated communities. They will be paid from a state emergency contingency fund of $100,000. The planning and rebuilding program will be handled through the State Development Commission.

The governor said, however, that the initiative must come from the towns because the "state cannot and will not impose its ideas and philosophies on the towns."

Thirteen communities have taken advantage of the offer and have requested planning aid. These include: Waterbury, Torrington, Winsted, Ansonia, East Granby, Putnam, Seymour, Canton, Naugatuck, Thomaston, Beacon Falls, Farmington, Washington.

Planners will work in teams to give direct "on-the-ground aid to cities and towns," Ribicoff said.

- **Advisory only**—The work of the planning officials will be on a technical advisory basis. Policies and decisions will remain the responsibility of local officials. The planning assistance program will be organized in four regions, including the lower Naugatuck Valley, upper Naugatuck Valley, Farmington Valley, and Putnam.

The governor again emphasized his opinion that riverfront areas could be better utilized for parking or recreational development, or for more highway right-of-way than for business.

To integrate rehabilitation with a legislative program, the governor has appointed an 18-man committee representing top executives in industry, labor, finance and government.

A prime function of the committee will be to undertake initial planning for reconstruction of roads, bridges, and other state facilities. The committee also will make recommendations for financially assisting towns in rebuilding schools, town roads, and municipally owned buildings. And, the group will consider methods by which the state can supplement federal agencies and relief organizations.

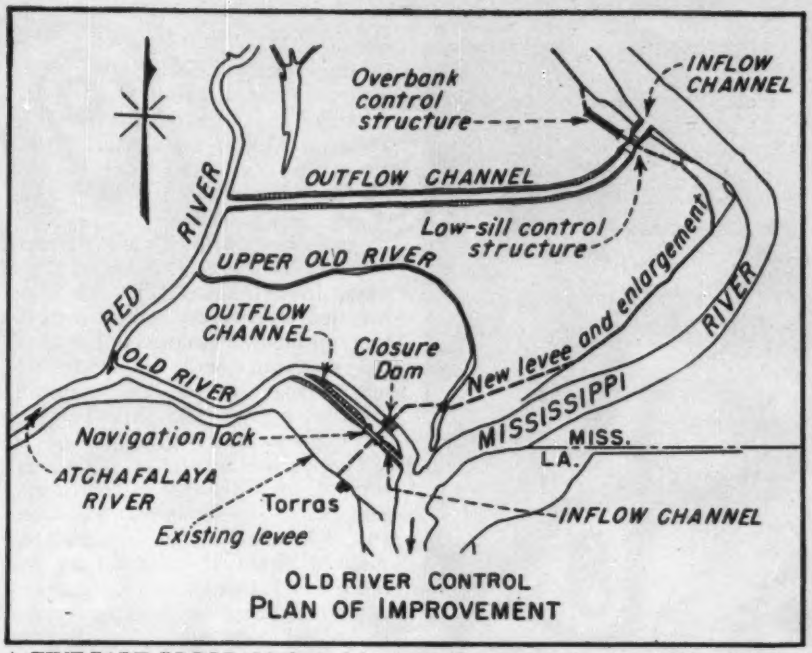

A FIVE-PART PROGRAM devised by Army Engineers will prevent the Mississippi from being captured by the Atchafalaya River. Project plans include a low-sill dam, an "overbank" structure to control the flow at flood stages, a navigation lock, new levee construction and sealing off of Old River.

Wandering Mississippi to Be Curbed

The F. and C. Engineering Co. of Houston, Texas, a subsidiary of Farnsworth & Chambers, Inc., has submitted the apparent low bid of $9.8 million for construction of the low-sill dam in the Old River division control project in Louisiana.

The low-sill dam is the first—and most important—unit of the $47-million project designed by Army Engineers to prevent the Atchafalaya River from capturing the Mississippi through diversion of waters into Old River (ENR April 8, 1954, p. 36).

Old River, only 6 mi long, connects the Mississippi with the junction of the Red and Atchafalaya Rivers some 100 mi above New Orleans. Every year Old River has been stealing more and more of the Mississippi's flow and sending it down the 140-mi Atchafalaya River to the Gulf of Mexico. Unless this growing diversion is placed under control, the Atchafalaya will become the master stream and 313 mi of the Mississippi below Old River will rapidly silt up.

The overall plan, which will take from 8 to 10 years to complete, has three principal features: two control structures on the west bank of the Mississippi about 10 mi upstream from Old River, and a navigation lock connecting the two rivers.

The 577-ft-long low-sill dam is designed to maintain low water flow of the Mississippi River water into the Atchafalaya. This flow is needed in the Atchafalaya to maintain navigable depths and to aid in the establishment of a main central channel.

The low-sill structure will have 13 gate bays, each with a clear opening of 37 ft. Three of the bays will have a sill elevation 5 ft below Gulf level to handle the extreme low water flow. The other bays will have a permanent crest 10 ft above Gulf level. All of the bays will have movable weirs to be placed on top of the sills to cut off the flow entirely at low and median river stages.

An inflow channel will be constructed from the low-sill structure to the Mississippi River. A 7-mi outflow channel will be built from the structure to the Red River at a point about 12 mi above its junction with Old River and the Atchafalaya.

The second major phase of the plan will involve construction of an "overbank" control structure adjoining the low-sill dam. This project—3,400 ft long with 97 bays—is designed to control the overbank flow of high water from the Mississippi to the head of the Atchafalaya Basin.

A third main project included in the overall program will be a navigation lock which is to be located in Old River near the Mississippi. This will be built so that the growing commerce through Old River won't be disrupted.

Later phases of the project will include levee work between Old River and the site of the control structures, and sealing off Old River.

Delaware Dams Helped; Governor Asks Another

Flood-stage figures for the Delaware River's recent rampage have come out of Pennsylvania with word that these new all-time records might have been even higher but for New York City's two completed water supply reservoirs in the basin.

The late August flood crested at 23.91 ft at Port Jervis, N. Y., higher than the 175-year record of 23.1 ft set in 1903, but reportedly 2 ft lower than it might have risen without control of the two reservoirs upstream. Pepacton and Neversink Reservoirs impounded 18.5 and 5.9 billion gallons respectively during the flood, controlling runoff from more than 15% of the drainage area above Port Jervis.

These findings have led Pennsylvania's Gov. George M. Leader to ask immediate legislative consideration to construction of proposed Wallpack Bend Dam lower down on the Delaware. This dam was a unit of the Incodel Plan for developing water supply of the entire Delaware Basin, and recently has been subject of legislation that would permit its construction by Pennsylvania, with a 30% interest from New Jersey.

It is estimated that existance of Wallpack Bend Reservoir, drawn down as would be expected in late August, might have delayed flood peaks downstream by six hours and cut the crest at Trenton by about 3 ft.

Gov. Leader reported that on his instructions to M. K. Goddard, State Secretary of Forests and Waters, an engineering firm would review Incodel plans for the Wallpack Bend Reservoir.

N. Y. Board of Education Changes Bid Procedures

From now on, the New York City Board of Education will pre-qualify bidders on all of its construction projects in an attempt to get "more substantial" bidders, according to Joseph Meehan, contract clerk for the board. Until now, pre-qualification in New York City has been required only by the New York City Housing Authority.

Ten days before the Board of Education advertises for bids on a job, it must, under the new amendment to the state education law, advertise to notify bidders of pre-qualification requirements. Once qualified, a contractor will remain on the active list for a period of one year. Contractors will be qualified on the basis of similar job experience and financial responsibility.

NEW TEACHING TECHNIQUES are passed along to college instructors during a summer graduate course in highway engineering. Conducting the seminar is Robley Winfrey, acting chief of the personnel and training office, U. S. Bureau of Public Roads.

A Boost for Highway Engineer Teaching

This fall college engineering instructors from 23 states and two foreign countries will return to their campuses with a new picture of what is going on in the highway field.

The 26 instructors have just completed the most ambitious teacher-training course in advanced highway engineering ever offered by the University of California's Institute of Transportation and Traffic Engineering.

For eight weeks the instructors divided their time between standard graduate work and seminars led by nationally-known highway engineering experts. They talked to top road men and educators. They made use of ITTE's laboratory facilities at Richmond. And they took field trips for close looks at design and construction techniques used in California's stepped-up highway construction program.

• **Financial aid**—How was the university able to offer its course to such a large group of teachers? And how was it able to get such wide geographic coverage? The answer lies in grants-in-aid. These—amounting to $650—were given each of the 24 U. S. participants by the Automotive Safety Foundation and the Highway Research Board of the National Academy of Sciences.

The ITTE staff members—and the two supporting organizations—hope that they have started a "chain reaction" in engineering education. They expect the reaction to begin when the instructors return to their classrooms and stimulate highway engineering education throughout the country. This, in turn, should eventually help meet training needs posed by rapidly-accelerating highway construction.

The institute, staffed with some 25 specialists in the various phases of the highway field, is ideally equipped to give teachers a comprehensive briefing in new highway science and practice. It was set up in 1947 by the California legislature as a research and instruction facility for highway design, construction and operation. Besides training both undergraduate and graduate students, it takes its know-how into all parts of the state through road schools for state and county highway officials.

• **Professional advice**—The summer session was based on two 3-unit courses. One was Highway Planning and Economics, taught by Prof. Donald S. Berry, ITTE's assistant director. The other was Traffic Engineering, taught by Prof. Ralph A. Moyer, an ITTE staff member. The first course covered highway planning surveys and the application of their results in highway programming. It also took up economic analysis and highway financing, and urban traffic studies for planning city improvements. The second course investigated analysis of traffic movement characteristics and methods for making traffic studies.

Weekly seminars emphasized new techniques in teaching highway engineering. They also dealt with engineering practice, and planning. The graduate courses themselves served as examples in teaching techniques. Professor Moyer, for instance, made a practice of assigning three students to lead discussions for each topic during class periods.

Seminars drew heavily on engineers from the California Division of Highways. In addition, ITTE staff members led discussions and demonstrations on highway taxation and finance, soil mechanics and bituminous research, road surface characteristics, drainage, highway and street lighting, and highway bridge research.

To give the instructors a first-hand glimpse of California construction, field trips supplemented classroom work. On one 1,100-mi trip the class observed freeway construction between San Francisco and Los Angeles as well as examining the geometric design and operation of Los Angeles freeways. It also visited ITTE's facilities on the campus of the University of California at Los Angeles. There, the institute studies psychological factors in traffic planning.

Another trip—to Sacramento—allowed the class to study California's use of punch card tabulation in highway planning. This demonstrated techniques of machine analysis of information gathered on such subjects as traffic and costs.

Seattle Approach Approved For Lake Washington Bridge

The Washington State Toll Bridge Authority has reached an agreement with Seattle on the western approach to the projected $20-million floating bridge across Lake Washington. As a result, construction contracts may be awarded by Jan. 1.

The Seattle approach, as originally planned by the authority called for construction of a highway about a mile due west to connect with the proposed Tacoma-Seattle-Everett toll road. City officials objected that this would not comply with a 1953 state law requiring construction of approach arterials into downtown Seattle.

Under the new agreement between city and state officials, the project will include the first unit of a highway extending from the bridge to the central business district. Tolls will be continued on the bridge until approach arterials can be built into downtown Seattle.

The new bridge will cross the lake east of Seattle (ENR July 22, 1954, p. 23). It will be similar in design to a 15-year-old span located several miles south, which is composed of 300-ft-long floating concrete pontoons anchored to the lake bottom.

STEADY, SURE HANDLING was necessary to set and drive the sheet steel pilings for the coffer dams. The American above is finishing the coffer dam before driving. On the U. S. Highway 77 bridge one mile south of Fremont, Nebraska, the American out-produced four other cranes, *some with higher-rated capacity*. The American's versatility enabled it to reach and lift many kinds of loads under adverse working conditions.

Bridge contractor gets...

20% MORE PRODUCTION WITH AN AMERICAN

An American 300 Series Crane showed unusual versatility and tremendous lifting power under difficult conditions during a highway bridge project on the Platte River in Nebraska recently. The American worked alongside four other cranes on this job and produced 20% more than any of the other machines, according to the job superintendent of the Capital Bridge Company contractors.

Making the coffer dams required setting and driving sheet steel pilings down through the river bottom to a hard clay underlay. Then, after excavating inside the coffer dams, thirty-two 41-foot 10-inch H-beam pilings were driven into the hard clay to form the footings for the ten pier foundations used in the 1,350-foot bridge.

The ability of the American Crane to perform permitted the operator to line up his sheet pilings fast and accurately.

"MOST POWERFUL for its rated capacity," says Al Goebel, operator for the Capital Bridge Company, of the American 300 Series Crane. "I've operated a lot of them," he says, "but this new American 300 Series is the easiest of all to handle." Anti-friction bearings in the American Crane's brake linkage cut leg effort of the operator in half and boost production accordingly.

WORKING WITH AMERICAN, Capital Bridge found another important advantage in the ease with which the machine can be transported from one project to another. They found that the American Crawler Crane can be moved over Nebraska highways *without special travel permits* which cut their lost time and considerably lessened routine "red tape". For factual, detailed information on how American Crawler and Truck Cranes can boost production on your jobs, see your American Distributor, or write American Hoist & Derrick Co., St. Paul 1, Minnesota.

Tractor-wise Owners and Operators

...in New International

"IT CAN SELF-LOAD AND DELIVER FASTEST"—"International TD-18A improvements like the new 300% stronger track frames and cartridge-type track roller seals increase production, machine life, and operating ease. As for power, our new TD-18A can self-load the 8-11 cubic yard scraper and deliver fastest of any crawler we ever had." *Here's proof extra traction matches the TD-18A's power increase!* G. W. Owen, Warden, Henry County Public Works, McDonough, Georgia.

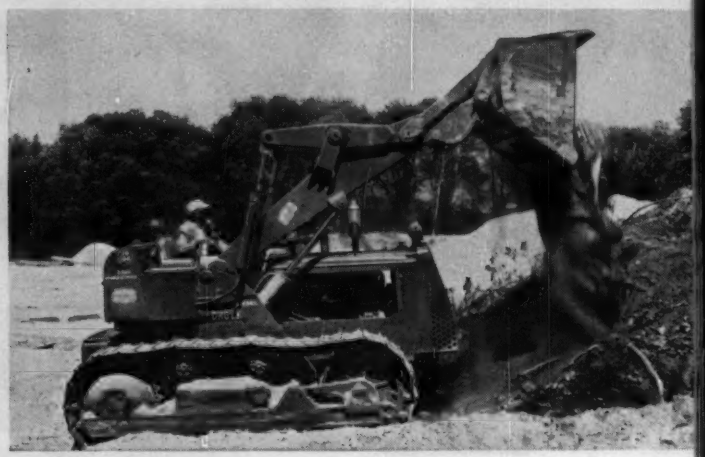

"EVERY LOAD'S A PAYLOAD"—"My International-Drott TD-18A Skid-Shovel is built for the operator's comfort. I know, because I'm the operator. It has 360° visibility which no other loader has. Every load is a payload." *No other outfit built gives you the TD-18A's combination of power, visibility and responsive controls. No wonder TD-18A handling ease turns "skinners" into high-producing operators throughout the day!* V. S. Steffes, Owner, Batavia, Illinois.

"OPERATORS FIGHT FOR NEW TD-18A"—"The TD-18A's were always good—fast, trouble-free performance and low operating cost made me money. The new TD-18A is stronger and really planned for the man in the seat. It has operators fighting for it." *Big, wide, comfortable cushions; hydraulic steering control boosters, and levers are conveniently grouped on the roomy, non-skid deck!* M. B. McKee, Chickasha, Oklahoma.

"LESS FATIGUE TO STRIP MORE COAL"—"There are two outstanding reasons why I like my new design International TD-18A. First it's designed to strip rugged terrain. And second, the operator can do more with less fatigue. The extended tracks enable working steep terrain with maximum production and safety." *Tough jobs, like coal-stripping, prove the TD-18A excels in ample new gear train strength, too!* Elmer Phillips, General Manager, Little Beaver Mining Corporation, Beckley, West Virginia.

Report on the Decisive Difference

TD-18A Performance

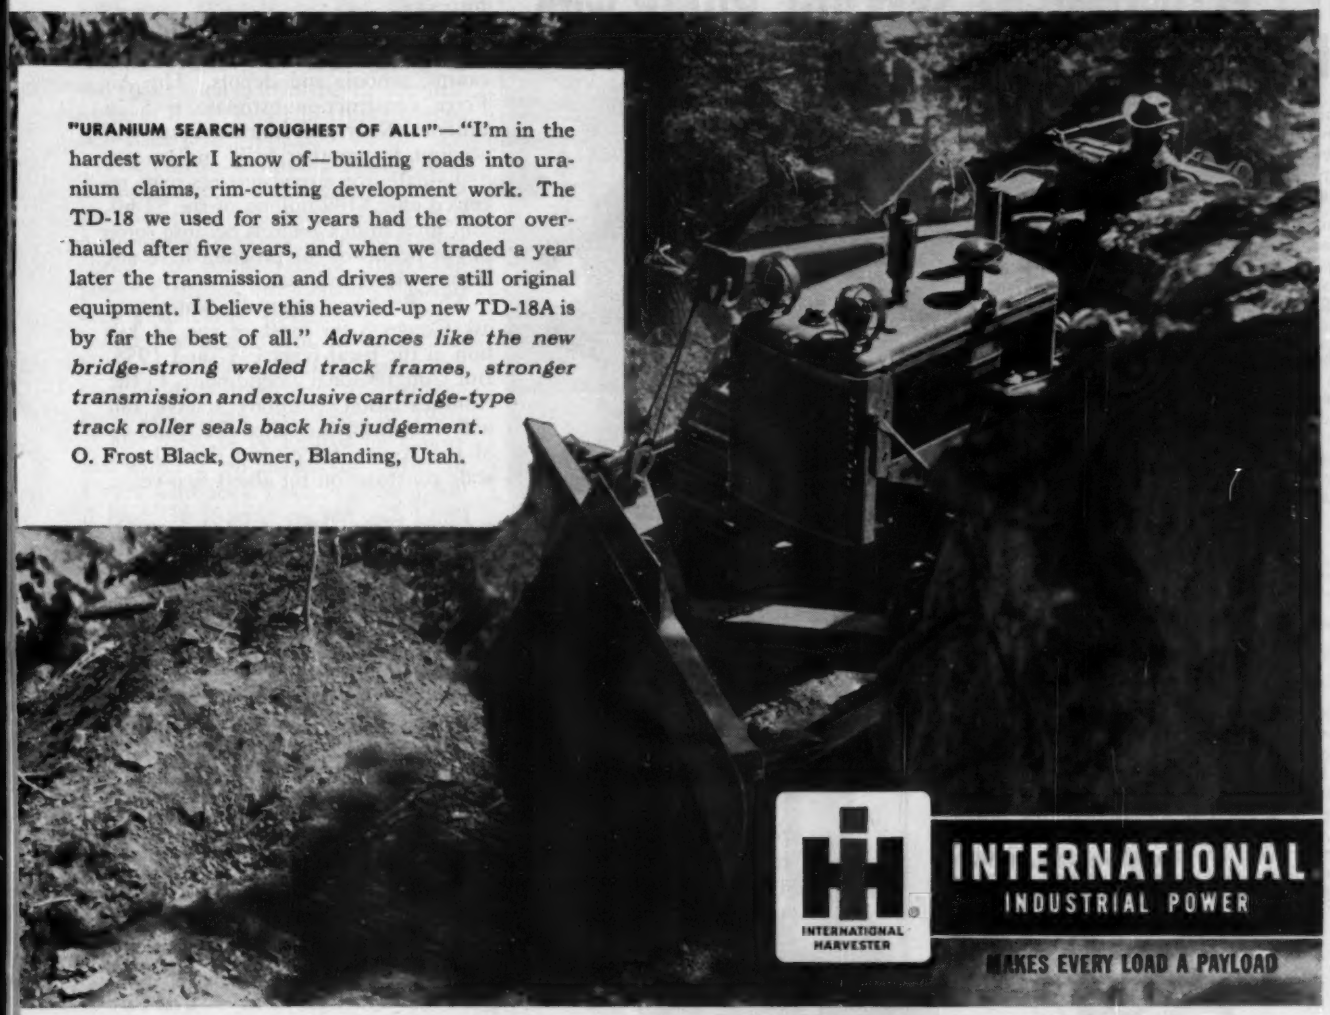

"URANIUM SEARCH TOUGHEST OF ALL!"—"I'm in the hardest work I know of—building roads into uranium claims, rim-cutting development work. The TD-18 we used for six years had the motor overhauled after five years, and when we traded a year later the transmission and drives were still original equipment. I believe this heavied-up new TD-18A is by far the best of all." *Advances like the new bridge-strong welded track frames, stronger transmission and exclusive cartridge-type track roller seals back his judgement.* O. Frost Black, Owner, Blanding, Utah.

INTERNATIONAL HARVESTER

INTERNATIONAL
INDUSTRIAL POWER
MAKES EVERY LOAD A PAYLOAD

Ease into foam-rubber-padded, panoramic-vision seat and see the *decisive difference*. Try new finger-tip power steering, and other big *job-easing incentives* for boosting production, as developed only by International. Prove TD-18A *full-power traction*—note, too, how the gear train is beefed-up to transmit 103 drawbar hp, and then some! Measure what new *300% stronger track frames* mean for *full-capacity performance* under slam-bang conditions. Compare how new *cartridge-type track roller seals*, and other International *downtime-prevention engineering*, beat anything else on tracks. Ask your nearby International Industrial Power distributor for a new TD-18A demonstration.

weil Super HEAVY DUTY Sewage Ejector

• SCREENLESS
• RUGGEDLY BUILT
• NON-CLOG IMPELLER

THE ECONOMICAL SEWAGE PUMP with the *NON-CLOG impeller!*

This WEIL Screenless Heavy Duty Non-Clogging Sewage Ejector is ruggedly built for years of trouble-free operation. WEIL Pumps of this design are still operating satisfactorily after 25 years of service.

This unit is completely factory assembled, economical to install – only one piping connection is required. Pre-assembly and factory testing insure LESS installation time and no "call-back" servicing.

Inherent in the design of this pump is an ample reserve of strength to meet the most severe conditions. The ease and simplicity of installation and the record of many years of trouble-free operation make this pump the logical choice with the engineer, contractor and owner.

Fig. C-9001

This Two Blade NON-CLOG Impeller is the most important part of the screenless non-clog sewage pump. Not only does it effectively handle large diameter solids but it also passes rags and stringy material of various lengths which are washed into the sewage pit. Pumps with this impeller successfully handle difficult pumping jobs such as waste from public toilets, canning plants, hospitals and industrial installations.



Fig. C-9021

This rugged pump casing with wide waterways permits unobstructed passage of the maximum solids handled by a non-clog impeller.

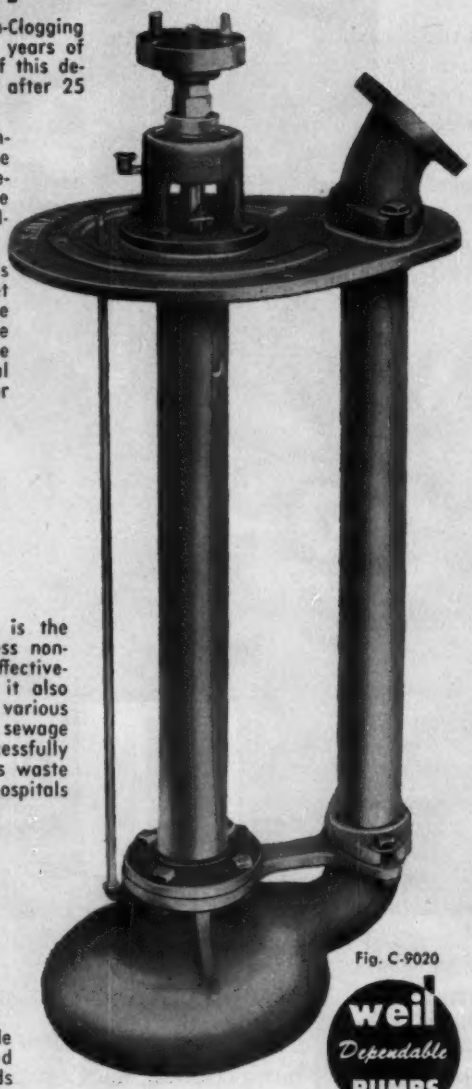

Fig. C-9020

weil Dependable PUMPS

Send for NEW Bulletin C-900 E

weil PUMP CO.

1528 NORTH FREMONT STREET • CHICAGO, ILLINOIS

Reserve Facilities

Military services embark on $1-billion expansion

A special $1-billion plan to expand military reserve training facilities over the next five to seven years is in the planning stage.

The program, which is in addition to other planned federal work (see page 21) stems from a new military reserve law which would more than triple the size of the trained reserve forces.

The Army estimates it will need $597 million worth of new armories, camps, schools and depots. The Air Force construction estimate is $256 million. Navy and Marine Corps will account for another $178 million.

To date, the armed services have received only $109 million of the $1-billion total from Congress because some of the details of the program have not been worked out yet.

The Pentagon originally planned to ask Congress for most of the $1 billion in the fiscal years 1957 and 1958. But Congressional amendments to the Administration's military reserve bill will slow down the scheduled build-up of the reserve forces and defer large-scale construction for about two years.

• **Army**—Plans call for 3,141 new armories, rifle ranges, ordnance repair shops and depots, amounting to $509 million; 279 weekend training camps, amounting to $75 million; and 17 new summer training camps amounting to $13 million.

• **Air Force**—Construction of new facilities will account for $214.2 million. Another $41.1 million would be spent for replacement of obsolete or rundown areas, and for additions to some training facilities. For the most part, the work would include new schools, aircraft maintenance shops, hangars, taxiways and runways.

• **Navy**—The Navy's construction program would include 16 new Naval Reserve training centers and additions to 12 "inadequate" training centers and 34 small electronic facilities. For the Marine Corps Reserves, 77 new training facilities would be required.

Fill May Replace Trestle On 12 Miles of Lake Crossing

The engineering department of Southern Pacific Railroad Co. is making tests to determine the feasibility of using rock fill to replace 12 mi of wood trestle on its Lucin cut-off across Great Salt Lake, Utah.

It is estimated that the project

would cost from $35-$38 million. A fast tax-write-off was approved by the Office of Defense Mobilization.

The 30-mi crossing now in use was completed in 1903 at a cost of $8 million. It consists of 18 mi of double track over fill, and 12 mi of single track over trestle. If the trestle is replaced with fill, the 12-mi stretch can be double-tracked.

First Contract Is Awarded On Canadian Hydro Project

Dawson, Wade & Co. Ltd., of Vancouver, B.C., has been awarded a $4.9-million contract for construction of the rock-fill dam involved in the first phase of the $19-million Upper Campbell Lake hydro project.

The British Columbia Power Commission project, which will merge Upper Campbell and Buttle Lakes into a 30-mi-long reservoir, is being pushed ahead to meet rapidly increasing power demands on Vancouver Island (ENR March 31, p. 64).

The Vancouver firm, in association with Maco Corp. of California, will start work immediately so that the commission can store water by 1956.

The dam, to be located on Campbell River 2 mi below the outlet of Upper Campbell Lake, will be 1,800 ft long, 36 ft wide on top and 1,000 ft thick at the base. Its construction will require more than 2,000,000 cu yd of earth and rock.

The dam will impound 800,000 acre-feet of water by raising the lake level 79 ft. It also will firm up 126,000 kw generating capacity at the downstream John Hart and Ladore Falls plants, and provide 63,000 kw at the Upper Campbell Lake site.

The second stage of construction on the hydro project will add another 30 ft to the dam height and include installation of a 52,500 kw generating unit. This will back water into Buttle Lake 15 ft over its normal level and form the reservoir.

Shopping Center Going Up On Indianapolis Outskirts

Construction of the $7.5-million Eastgage Shopping Center on U.S. Highway 40 at the eastern edge of Indianapolis got under way last week.

When it is completed late in 1956, the center will include 56 stores and shops, parking space for 3,000 cars and a 350-seat auditorium.

Work on a second shopping center at the northeastern edge of the city is slated to start early next year. L. S. Ayres & Co. and William H. Block Co., two of the leading department stores in Indianapolis, will be the major occupants.

ANOTHER PROBLEM SOLVED BY SPENCER, WHITE & PRENTIS

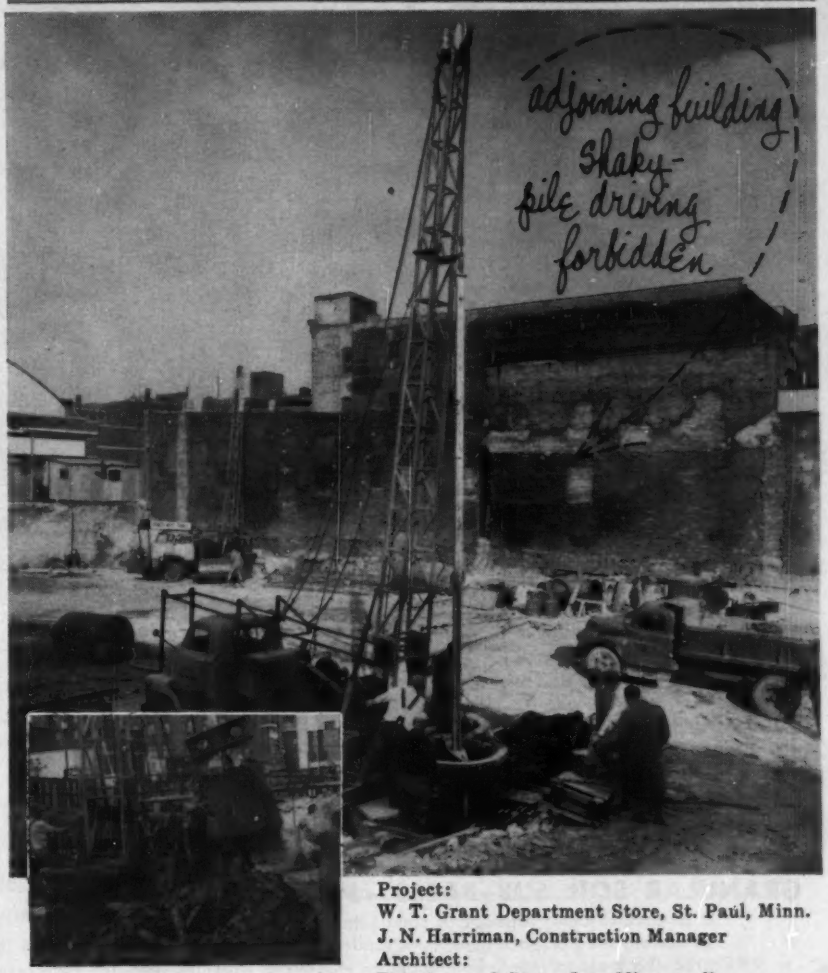

Project:
W. T. Grant Department Store, St. Paul, Minn.
J. N. Harriman, Construction Manager
Architect:
Thorshov and Cerny, Inc., Minneapolis

MACHINE-DRILLED CAISSONS SOLVE PROBLEM QUICKLY, ECONOMICALLY

A foundation going down 44 ft. to bedrock was required on this job. But soil contained much soft clay and the city authorities would not permit pile-driving, fearing that vibrations might make the adjacent building unsafe.

Solution? Two earth-boring machines drilled the 47 needed caissons in short order and at costs well below budget. A 10-ft. layer of quicksand posed a special problem but our engineers devised a technique to seal it off with steel casings.

Our earth-borers have perfect qualifications for jobs of this kind and they are always willing to travel. We have sped these easily-transportable machines to many different locations ranging from Minnesota to New Jersey, from the District of Columbia to the Province of Quebec. Where is *your* job located?

CATALOGUE ON REQUEST

FOUNDATIONS • PILING • UNDERPINNING • SHORING • COFFERDAMS • SPECIAL SERVICES

SPENCER, WHITE & PRENTIS INC

10 EAST 40TH STREET, NEW YORK 16, N. Y.

DETROIT: HAMMOND BLDG. • CHICAGO: 134 SO. La SALLE ST. • WASHINGTON, D. C.: TOWER BLDG.

IN CANADA: SPENCER, WHITE & PRENTIS OF CANADA, LTD.

TORONTO: 700 BAY ST. • MONTREAL: 2052 ST. CATHERINE ST., WEST

FAST, COMPLETE COMPACTION OF 12" MACADAM BASE COURSES

Specified density of base courses of rock, slag, soil-bound macadam, gravel and sand up to 12" thick is achieved in jig-time with the JACKSON MULTIPLE VIBRATORY COMPACTOR. Frequently no more than one pass is required. Likewise, one pass suffices to solidly fill all voids from top to bottom when sufficient dry fines have been spread. With a standard width of 13', 3", working speeds up to 60 FPM and reverse travel of 5½ MPH, this machine offers single course compaction at its best — tremendous opportunity for time-and-money savings.

GRANULAR SOIL SUB-BASES — PAVEMENT WIDENING

It is equally advantageous in compacting granular soil sub-bases. And by towing the compacting units in tandem at the side of the tractor, any granular material used in flexible base course widening can be compacted to specified density in one pass.

LARGE AREA FILLS: Nothing approaches the efficiency and convenience of this machine in compacting granular soil fills such as bridge approaches, sub-bases for large concrete floors, parking lots, etc. It quickly achieves desired density and individual units may be sub-contracted and even fitted with operating handles to suit every condition and to get into the really tight places. Interchangeable bases 12" to 26" in width, are available.

IN TRENCHES — CLOSE TO FOOTINGS, ETC.

The manually-guided, self-propelling JACKSON COMPACTOR (similar to one of the compacting units used in the MULTIPLE, fitted with operating handle) has proved exceedingly successful on thousands of granular soil compaction jobs and is widely used for bituminous pavement patching. Operated from a Jackson Power Plant on auto trailer having quick pick-up device for loading and carrying Compactor.

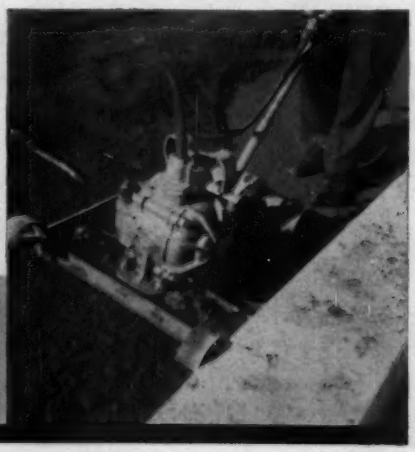

See your **JACKSON DISTRIBUTORS** or write us for complete information.

JACKSON VIBRATORS, INC.
LUDINGTON, MICHIGAN

Sewerage Program

Works costing $15 million slated for Syracuse area

The Ondondaga Public Works Commission will open bids Sept. 21 for the first segment of a $15-million program for construction of sewerage facilities for the metropolitan Syracuse, N. Y., area.

Later this fall, bids will be asked on separate contracts for a pumping station, a force main and digestion tanks, and a control house.

The Sept. 21 letting will be for 7,500 lin ft of trunk sewer, with an estimated cost of $750,000. Work on this stage of the project is scheduled to get under way in October.

Early this year, the Onondaga Public Works Commission, responsible for overall planning of sewerage facilities in the county, inaugurated the design of trunk sewer and treatment plant facilities for the newly formed metropolitan Syracuse Treatment Plant District and the West Side Sanitary District.

• **Construction outlined**—The program for the two districts includes construction of a 50-mgd primary treatment plant and a 6-mi effluent force main to serve the major portion of the City of Syracuse and the suburban West Side Sanitary District; trunk sewer and pumping facilities to serve the West Side Sanitary District; and modifications of an activated sludge treatment plant now serving the Ley Creek Sanitary District.

The county construction program, scheduled for completion in 1959, will provide trunk and treatment facilities that will enable towns in the metropolitan Syracuse area to start work on badly needed laterals.

The Onondaga Public Works Commission has retained O'Brien & Gere, Syracuse consulting engineers, to design the facilities.

Monorail Transit Test Started in Houston Park

Preliminary work has been started in Arrowhead Park in Houston, Texas, on a test section of a monorail rapid transit system proposed for that city. The test section is to be 830 ft long and will consist of 15 towers 26 ft high of "inverted J" design to carry the monorail with a 51-passenger car. The car is to have a clearance of 14 ft above ground.

This pilot project is privately financed, sponsored by Monorail, Inc. of Houston, Texas. Francis J. Niven, Houston, is consulting engineer.

A Big Reason Why More Firms Are Switching to Copyflex . . .

PROBLEM-FREE INSTALLATION and OPERATION!

Model 93

Because Copyflex reproduction machines are completely free from fumes and odors, they require no exhaust venting . . . they need no plumbing or auxiliary equipment, no installation other than an electrical connection.

Because they are absolutely clean, quiet, and odorless, they can be operated *anywhere* without annoyance to personnel in the vicinity.

That's why the people who handle reproduction, and know it best, prefer Copyflex. It's a big reason why more and more firms are switching to Copyflex!

Why settle for less when it costs no more to own the one machine that offers you *all* the advantages of diazotype, positive black-on-white reproduction—speed . . . economy . . . quality—*plus* trouble-free installation and ideal operating conditions!

You'll find that Bruning also gives you the widest selection of reproduction materials available anywhere. Mail coupon for information on models and prices—today!



PUT IT HERE . . .
Near an inside wall—
no plumbing, no ducts!

PUT IT THERE . . .
Near an outside wall—
no vents in walls, windows!



PUT IT ANYWHERE!
Needs only an electrical connection for operation!

BRUNING Copyflex

Best Process! Best Machines!
Best Selection of Materials!

Specialists in Copying Since 1897

Charles Bruning Company, Inc., Dept. 93M.
4700 Montrose Ave., Chicago 41, Ill.
Please send me information on Copyflex Reproduction Machines.

Name_____ Title_____

Company_____

Address_____

City_____ Zone____ State_____

CHARLES BRUNING COMPANY, INCORPORATED • 4700 MONTROSE AVENUE • CHICAGO 41, ILLINOIS

START is timed for low tide, when bulldozers in tandem cut 2-ft deep trench, pushing sand seaward.

How to Build a Beach

With exactly 31.5 miles of actual ocean front land within its official borders, the State of Maryland has long been determined not to lose an inch to the Atlantic Ocean. And state engineers are succeeding not only in holding the beaches but in building them bigger, at costs and with methods so cheap and so easy that they are worth study by possessors of much more ocean-front real estate.

Using nothing but beach sand, asphalt, two bulldozers, a couple of trucks, manpower—and great ingenuity—the state is building groins that work and last at the cost of about $10 per foot of length. Previous groins of wood have cost $80 a lineal foot, or more.

The proof exists for anyone to see at the state's playground area of Ocean City, where a program of building the new type asphalt groins has produced acres of new beach. And what's more—has held the beach against the worst that the ocean and the wind can do.

A large part of the credit for the work goes to one man—Walter C. Hopkins, now deputy chief engineer of the Maryland State Roads Commission—and to theories that he and others have worked out after study that dates back (in Hopkins' case) to 1923.

In a nutshell, the theories are these:

1. Any groin for beach protection and buildup should be impermeable.

2. The groin should be as low in the water as possible—preferably about two feet below mean high water, so that it will provide, in effect, a settling basin for waterborne sand.

3. The groin should be built with as few sharp edges as possible, and in such a way that the water can flow over it smoothly.

• **Genesis**—Although the groins as they are now being built are actually so simple of construction that they can be built with ordinary road equipment and unskilled

OCEAN CITY (right) is only 840 ft wide at its widest point. Asphalt groins are almost invisible after few weeks of operation.

STEP 2—Sand removed from trench becomes a cofferdam, designed to protect work on tip of groin at water level.

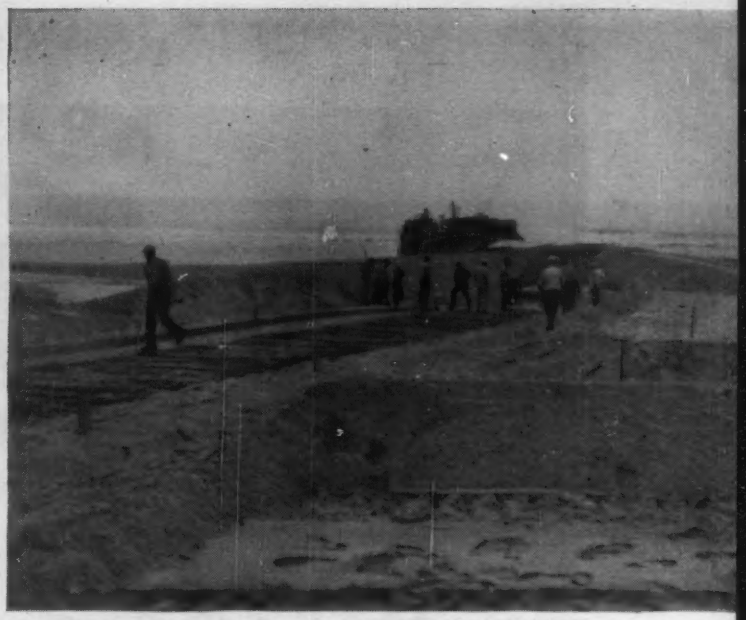

STEP 3—Airplane landing mats go in to give traction for trucks, and boards for side forms are staked into place.

at Economy Prices

labor (in Maryland prison labor has been used), their development was of course no simple, easy matter.

A bit of geography and some little history is necessary to set the scene.

Almost the entire length of the so-called DelMarVa Peninsula (occupied jointly by Delaware, Maryland and Virginia) is bounded by a long, narrow barrier reef of sand, running almost due southward from the southern shore of Delaware Bay to the mouth of Chesapeake Bay.

Varying in width from a few hundred feet to perhaps two miles, this sand reef encloses within it a continuous body of shallow, brackish water.

In the years since state lines were established, ocean

STEP 4—First load of hot-mixed asphalt-sand is dumped, through water that has seeped in. Placement is done by hand.

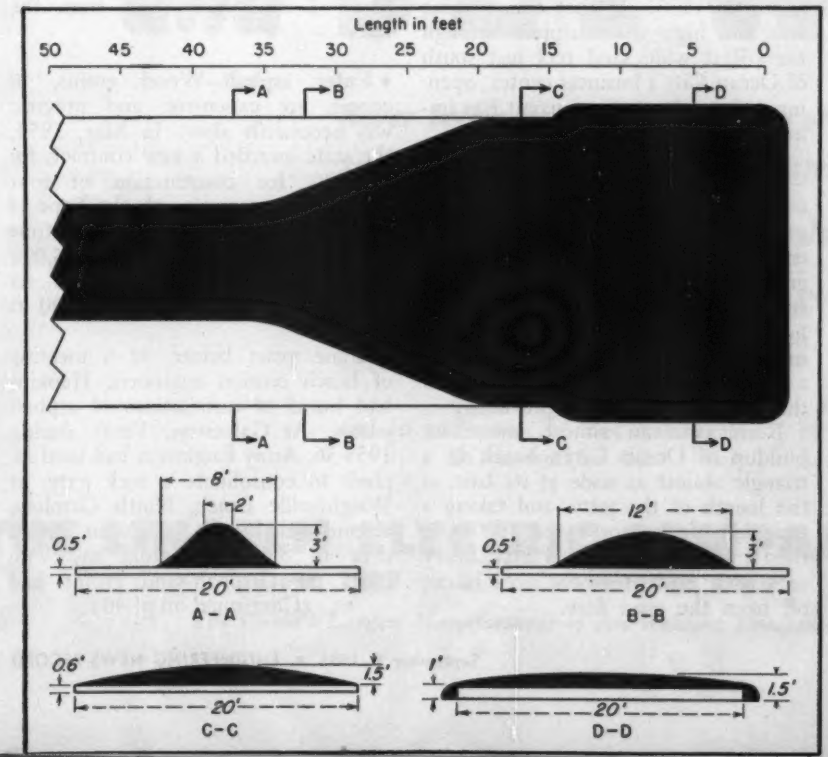

FINISH—Coming up the beach toward dune-line, groin is shaped into triangular section. Landing mats are removed as construction proceeds.

WITHIN A WEEK, groin is getting hard to find under quick covering of tide and wind deposited sand.

Beach Building at Economy Prices

communities—most of them of tiny size—sprang up along the beaches, where first fishermen and later vacationers built homes on the windblown sands facing the roar of the surf.

Perhaps the largest of these is Ocean City, where the fine sand beaches attracted vacationers as far back as the 1880's. Ocean City's population—also typical of the area—varies between about 2,000 in winter to nearly 100,000 at peak of the summer season.

Constant erosion of the beaches, however, was a problem, and in 1923 the State Roads Commission—interested because of a road that runs the length of the Maryland section of the sandspit—assigned young Walter Hopkins, then connected with the bridge department, to see what could be done.

• **Lessons**—Starting with the then conventional wood groins some of which can still be found on ocean beachfronts—a double row of piling, interwoven basket fashion with brush and timbers—and careful observation of the key factors of wind and littoral currents, Hopkins came up with the key theories that were to govern almost all the state's future work on beach protection and buildup:

• The permeable groins didn't and couldn't work satisfactorily, because they provided too many points of scour for water action.

• There is a veritable river of sand, carried by a southward-flowing littoral current, running a relatively few feet offshore from the low tide line along the full stretch of Maryland's abbreviated shoreline.

• Permanent-type fittings such as bolts are a much more important factor in the life of a solid wood groin than is the wood itself. First failures in ordinary type groins usually occur after fittings have rusted away, permitting the structure to become loose.

Following the last of these lessons, Maryland has for many years now used bronze bolts on its wood groins —and reports no failures.

• **Demonstration**—Graphic demonstration of Hopkins' two basic theories came out of a major disaster—a hurricane in 1933. At that time, raging seas and high winds ripped through the 650-ft wide sand reef just south of Ocean City's business center, opening a channel into Sinepuxent Bay immediately to the west.

Determining that the new channel —providing an outlet to the bay some 60 miles above the old outlet—would improve the quality of bay water and create new fishing and oyster breeding grounds, the Corps of Engineers constructed rock jetties 1,200 and 600 ft long to protect the new opening. They incorporated within the northern jetty a part of an impervious wood groin that Maryland had built previously.

Result was an almost immediate buildup of Ocean City's beach in a triangle almost as wide at its base as the length of the jetty, and taking a triangular form northward for more than a mile. South of this jetty, heavy erosion is evident as the area is cut off from the sand flow.

"All you had to do," says Hopkins, "was to stick some sort of a proper barrier into the sand river flowing just offshore—and you had a beach."

Encouraged, the state appropriated more money for further remedial work, and the wood groins began to extend northward along the beach, gradually developing according to Hopkins' theories, to a low, straight contour, several feet below high water line, fitted with bronze bolts and heavily creosoted timber.

Long and careful observation of the wind and water developed a pattern of groins placed roughly every 400 ft northward from the inlet. By the end of 1953, these groins had been built northward as far as 26th Street, about 2 miles northward from the inlet.

• **Enter asphalt**—Wood groins, of course, are expensive, and progress was necessarily slow. In May, 1954, the state awarded a new contract, for $61,000, for construction of four more of the groins, with the hope of reaching the Delaware line some time in the future. Costing roughly $15,000 each, these groins took about six weeks to build to their full 200 ft length.

Some years before, at a meeting of beach erosion engineers, Hopkins had heard of installations of asphalt jetties. At Galveston, Texas, during 1935-36, Army Engineers had used asphalt to consolidate a rock jetty; at Wrightsville Beach, North Carolina, a sand-asphalt mix had been placed over an old wood groin in 1948; eight pure asphalt-sand groins had

(*Continued on p. 40*)

Welding industry's greatest cost-cutting twins . . .

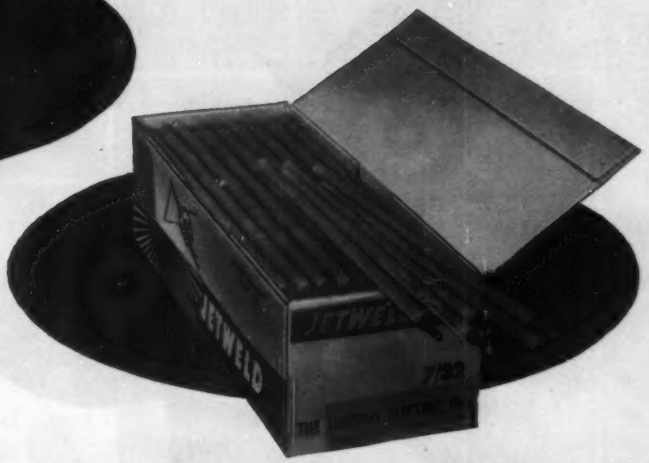

IDEALARC *and* JETWELD

Never before has any combination of welder and electrode offered such a cost-saving potential in faster, easier welding. Here's why:

Idealarc for easy, efficient operation . . . first welder to give you *both* AC AND DC WELDING CURRENT with Dual Arc Control where you select "soft arc" or "forceful arc" on AC as well as DC and in addition . . . hot starting on DC as well as AC

Jetweld for high-speed operation . . . first universally adopted iron-powder electrode for
extra-fast welding
high deposition
drag operation

LET LINCOLN DEMONSTRATE HOW YOU CAN PROFIT . . . NOW. Send for Bulletin 1343. Write . . .

THE LINCOLN ELECTRIC COMPANY
Dept. 2307 • Cleveland 17, Ohio
The World's Largest Manufacturer of Arc Welding Equipment

"It's a wall with a window

_That's Truscon's Vision Vent!"

Vision-Vent is Truscon's new wall panel th
incorporates all the mass production and
stallation economies of standard steel windo
Each unit is complete, with fixed lights a
insulated steel panel. Window openings may
awning-type ventilators or Truscon Double-Hu
Steel Windows. Elements can be varied to m
specific requirements.

Weathertight Vision-Vent panels are designed
cover entire wall surfaces. Erection is done fr
inside, and can average a floor-a-day rate.

REPUBLI

World's Widest Range of Standar

SPECIFY TRUSCON STEEL JOISTS, ROOFDECK... ELECTRUNITE E.M.T. FOR FIRE RESISTANCE

Truscon "O-T"® Steel Joists assure you lightweight, strength, and fire resistance in floors and roof construction. Truscon Ferrobord® Steeldeck is easy to handle, easy to place. It comes in lengths that span three or more purlins. It roofs large areas quickly. Exclusive design allows full-length interlocking, greater strength.

ELECTRUNITE® Electrical Metallic Tubing is Republic's lightweight, rigid steel raceway that protects wiring circuits against fire, moisture, and mechanical injury. Inspected by Underwriters' Laboratories. Approved by National Electrical Code for exposed, concealed, or concrete slab construction. Exclusive "Inch-Marked"® feature means installation savings.

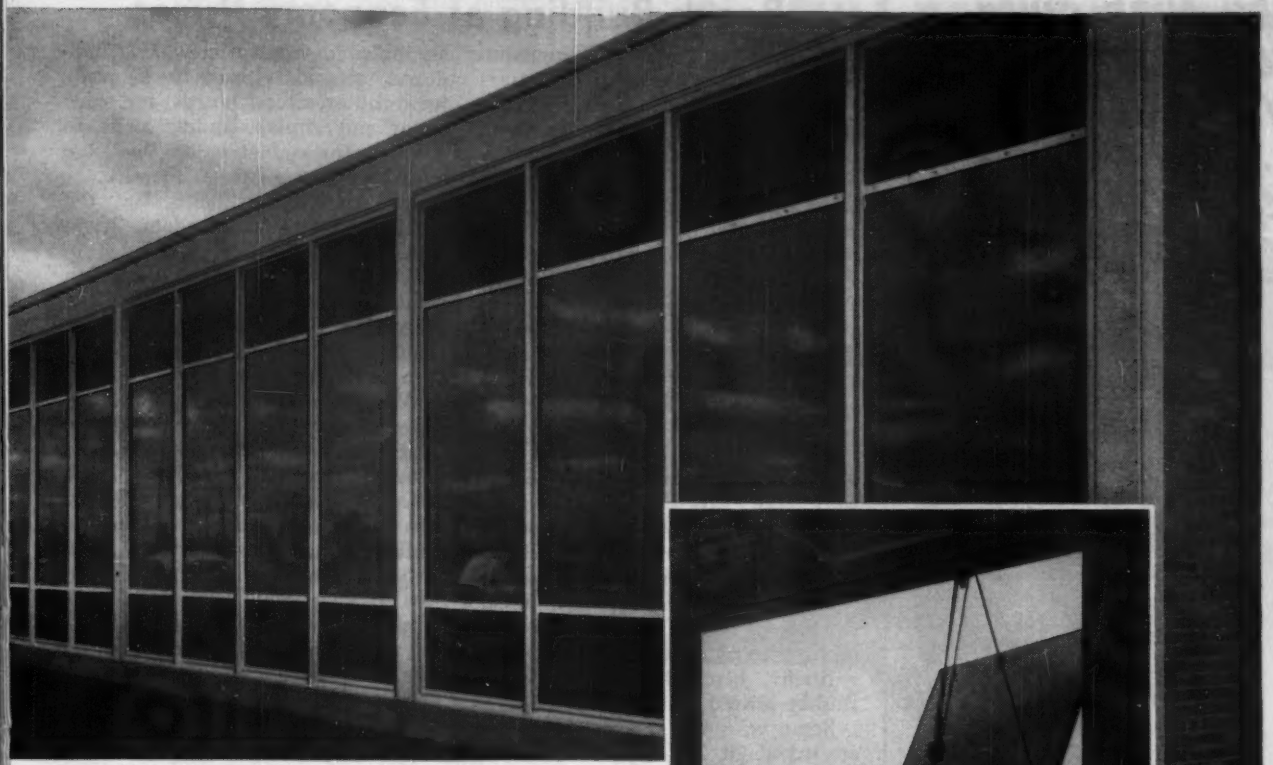

United Airlines, Midway Airport, Chicago, Ill.
Skidmore, Owings and Merrill, architects. Algot B. Larson, contractor.

Insulated panels may be colored porcelain enamel or stainless steel. "U" factor is equivalent to that of an ordinary masonry spandrel wall. They retain interior heat. They provide for efficient air conditioning.

Several dozens of new Vision-Vent applications have been engineered to provide simplicity of design, weather resistance, low initial cost, low maintenance cost. You'll be interested in the details. Write Republic's Truscon Steel Division, Youngstown 1, Ohio.

STEEL

Steels and Steel Products

Wherever clothing is changed or stored, Berger Steel Lockers are first choice. Republic's Berger Division is the world's leading producer of standard and special purpose lockers—including exclusive handle-free "Key-Control" lockers. The key is the handle to assure full-time locked protection. Look to Berger for planning, engineering and installing locker systems.

REPUBLIC STEEL CORPORATION
3114 E. 45th Street
Cleveland 27, Ohio

REPUBLIC STEEL

Please send me more details on

- ☐ Truscon Vision-Vent Walls
- ☐ Truscon "O-T" Steel Joists
- ☐ Truscon Ferrobord Roofdeck
- ☐ Electrunite E. M. T.
- ☐ Berger Steel Lockers

Name_____

Address_____

City_____ Zone_____ State_____

K-7115-A

TRU-CURE GIVES YOU MAXIMUM WATER RETENTION

...Saves Time and Labor!

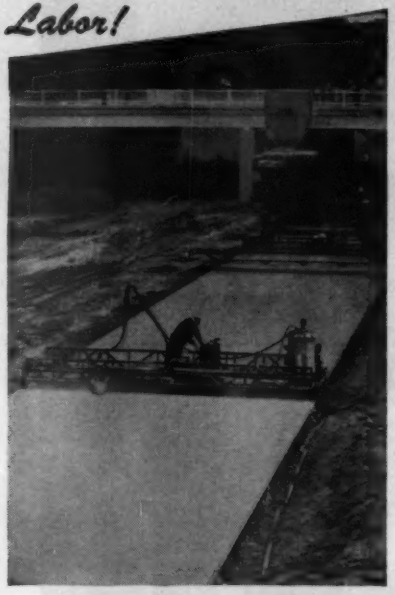

THIS CONCRETE WILL BE *STRONG* and *DENSE*. TRUSCON "TRU-CURE" PREVENTS EXCESSIVE MOISTURE LOSS IN THE EARLY STAGES OF CURING

Truscon "Tru-Cure" is a liquid curing compound for concrete. It permits *proper* curing by preventing moisture loss especially in the early hours immediately following the pouring of concrete. This is the real *danger* period when heat or air movement causes too-rapid evaporation, resulting in surface shrinkage and "checking."

You'll Profit From These Advantages, Too . . .

- Saves clean-up after curing is done
- "Cures" at lowest cost per yard
- Requires minimum of equipment
- Protects against rain, sand and dirt
- Requires only one inspection
- Eliminates quick break-off of curing and sudden drying-out of surface

Available in clear or light-reflecting pigmented types. Meets state and other governmental specifications.

SEND COUPON BELOW FOR FULL DETAILS

TRUSCON Laboratories
Division of Devoe & Raynolds Co., Inc.

Truscon Laboratories
1700 Caniff, Dept. E-10
Detroit 11, Michigan
Rush Tru-Cure folder No. 841 to:

Name .....
Firm .....
Address .....
City .....Zone .....State .....

. . . Beach Building at Economy Prices

been built in 1951 at Fernandina Beach, Fla.

Hopkins and Norman M. Pritchert, chief engineer, went to Fernandina Beach to investigate. Enthused, he enlisted the aid of Governor Theodore R. McKeldin, talked the contractor out of his $61,000 contract (on payment of expenses incurred to date); pulled F. P. Scrivener, L. W. Carr, and later Project Engineer John A. Bushby away from other work to supervise the new venture, and went to work.

In a year since that time, the Roads Commission has built 44 of the new type groins.

• **Design background**—In the year of work, the Roads Commission has now evolved a fixed type and contour for its groins, starting with one that had two "steps" in it to follow the contour of the beach, and ending in the present type that has a fixed slope of its entire length.

Briefly, here's how Hopkins and Bushby arrived at their designs:

Some years ago, a sand fence was erected about 250 ft back from and parallel to the surf line, and sand has mounded over the fence (both by wind and wave action) to an average elevation of 20.

Using this mechanically-made dune and the natural dune line wherever it exists, as a base, it was determined that the beach slopes on an 8% grade from mean low water for 100 ft, then flattens to a 4% grade back to the dunes. The first groin was built to conform to this general contour, on a 7% grade in general. As finally evolved, the groins have a constant 5% grade without a break, back from the water line.

The sand available on the beach is a fine white, rounded sand, 83% of which will pass a No. 40 sieve, and is fine for bathers, but offers little possibility of compaction and nearly no support for heavy vehicles.

First designs called for a two-step construction operation, putting down a 6 in. thick asphalt apron in one step, then building the groin in a second operation. Further development this year has made possible a one-step job.

The final shape (see drawings) is a 200-ft long finger of asphalt and sand, extending from the dune line into the water, ending at the water in a smooth spatula-shaped structure, only inches above the sand.

• **How to build a groin**—Construction operations go fast. Here's how it works:

Prior to absolute low tide, Bushby assembles his 20-man crew, two bulldozers, gets his asphalt trucks ready to roll, assembles boards for edge forms and airplane-landing mats to give the trucks footing on the loose sand, and prepares to go to work.

As soon as the tide is low, the 'dozers, working in tandem, begin cutting a trench 22 ft wide and 6 in. deep on 25% grade for the full length of the proposed groin, pushing the sand before them into the sea to form a temporary cofferdam. Grade stakes have been placed previously.

While the dozers are still working, crews place boards along the sides of the trench to serve as side forms, and other men follow immediately with the airplane mats. The trucks, loaded with hot-mix asphalt, move in immediately, dumping at the outer spatula-shaped end and are followed by work crews who shape the asphalt rapidly—and with as little actual handling as possible to prevent separation of the mix—with spades and rake. The spatula is shaped on top very much like an inverted tablespoon, rising from an elevation equal to that of the sand to a maximum of about 18 inches, with its edges as smoothly rounded as possible.

As the dumping proceeds backwards up the beach, the groin begins to assume a triangular shape that eventually becomes 3 ft high and 8 ft wide at the base with a 5 ft. apron on each side. Although slip-forms were tried on the first groins built, they did not prove successful, and work is now done entirely by hand.

Standard time for complete construction is now about 8 hours.

A small portable hot-mix asphalt plant is used to prepare the asphaltic material, and beach sand is the aggregate for all but the first 35 ft of the structure (from low water). The peculiar rounded beach sand, hard to hold together even with the asphalt mixture, dictated use of bank-run sand for this first section of the groin. But in either case the mix consists of 91% aggregate and 9% asphalt (60-70 penetration, paving grade).

• **Quantities and heat**—Because of the fact that the mix must often be placed in sea water (the sand cofferdams are not impervious and are subject to breakdown by wave action in about 45 minutes) and because the material is worked into place by hand, heat is carefully controlled.

The mix for the first 100 ft is heated to a temperature of about 350 deg. F. while for the remainder of the groin a temperature between 225 and 250 deg F is satisfactory.

Trucks used are 6-yd end dump machines. Larger vehicles have difficulty maneuvering in the sand; more importantly, their loads are too great for easy handling by the working crews.

Quantities approximate 1.4 tons of asphalt-sand per lineal foot of groin. Bushby estimates this material is put in place now for about $9.80 per lineal foot, including all costs.

So fast is the sand buildup, once the groins are installed, that most of them have been virtually buried within a week of the time they were installed.

Only slight trouble has developed in any of the groins—mostly breakage along the sides of the triangular section. Engineers attribute this not to water action but to separation caused by the roundness of the sand grains, and by uneven cooling in handling and shaping. Investigations of this problem are going forward in cooperation with The Asphalt Institute, whose District Engineer R. K. Williams and Assistant Chief Engineer George H. Dent have been working closely with the Maryland officials on the installations.

However, according to Hopkins, the slight breakage has done no apparent harm to the work of the groins, so long as it does not disturb the smooth contour of the top.

Constant pounding of surf on the spatula-shaped ends has done no apparent damage at all. And there has been no undercutting of the groins, despite their lack of foundations. "They just bend into any slight depression the water can make," comments Bushby.

Although Ocean City was not in the direct path of two recent hurricanes (Connie and Diane) the area was exposed to high winds and heavy surf action. An inspection of the 43 groins immediately after the storms showed these conditions:

Seven of the groins are in excellent condition; 24 in good condition; 12 in fair condition, needing some repair.

Washington Plant Expansion Will Increase Alcoa Output

Aluminum Company of America is planning a $2-million expansion of its Wenatchee, Wash., plant to increase the annual capacity from 85,000 tons to 100,000 tons.

Production from the expanded facilities is scheduled to start next May.

The increased output will depend upon interruptible power from Bonneville. But Alcoa hopes to secure a contract for firm power, and is now discussing this possibility with various public and private power groups in the Pacific Northwest.

You Get FULL TORQUE CAPACITY For Entire Life of Friction Material...

Lipe Constant Capacity CLUTCH

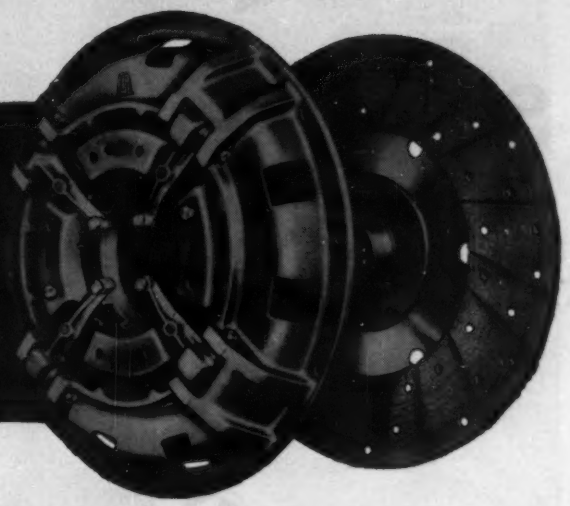

Just as long as there's the least bit of wearing surface left on the friction material, the Lipe Constant-Capacity Clutch maintains its torque capacity. A unique application of the toggle principle automatically compensates for friction material wear. The constantly increasing leverage of the toggle —which never goes over center—builds up pressure in almost direct ratio to friction material losses and compensates for fading pressure of expanding springs.

DESIGNED FOR HEAVY DUTY, LONG-WEARING SERVICE

PARALLEL CONTACT—because arrangement of the toggles assures a uniform pressure application pattern. Every square inch of facing area engages simultaneously, preventing highly concentrated heat areas and spot burning.

LIPE Constant-Capacity CLUTCH

- Engages firmly and smoothly
- Automatically compensates for wear of friction material
- Automatically compensates for fading pressure due to spring expansion and fatigue
- Balanced spring pressure through toggles maintains parallelism of pressure plate
- High thermal efficiency dissipates heat rapidly
- Internal cooling protects springs from overheating and loss of temper
- Automatically compensated pressure needs no adjustment

NO SERVICING—because these self-compensating, non-adjustable clutches insure automatic internal adjustment throughout the life of the clutch facings.

SOFT ENGAGEMENT—because the toggles absorb the initial energy of the springs... and because the speed of the toggle action fades as the pressure plate approaches the friction element.

HIGH THERMAL EFFICIENCY—because the massive plate, ribbed for rapid radiation, is cooled by generated air currents.

Write for specifications, performance data, and free service manual.

LIPE ROLLWAY

Lipe-ROLLWAY CORPORATION

Manufacturers of Automotive Clutches and Machine Tools

Syracuse 1, N. Y.

HERE'S A CONSTRUCTION JOB'S BIGGEST ENEMY

TIME makes or breaks the success record on engineering projects: *Days* saved at the beginning of the project may mean *weeks* and *months* saved at the end.

That's why many engineers are relying on speedy, accurate aerial mapping to move up their starting date on the job.

"*Five times faster—one-fifth the cost*" was the AERO mapping record on a major turnpike project. 90 days for AERO vs. two years for ground surveys was our performance on another assignment. And recently we delivered route maps for 465 highway miles—in 75 days! Other AERO projects include topographic mapping and photo-maps for the huge AEC Savannah River facility, for the Cerro Bolivar development in Venezuela, for the City of Durham, N. C., and for many other highway, railroad and city development projects.

Let our engineers show you how AERO mapping can save important time, as well as valuable manpower, at the very beginning of your project.

PRECISE AERIAL MOSAICS
TOPOGRAPHIC MAPS
PLANIMETRIC MAPS
AIRBORNE MAGNETOMETER SURVEYS
SCINTILLATION COUNTER SURVEYS
RELIEF MODELS
SHORAN MAPPING

AERO SERVICE CORPORATION

PHILADELPHIA 20, PA.

Oldest Flying Corporation in the World

Offices in TULSA, DULUTH, SALT LAKE CITY

Our Canadian Affiliate is CANADIAN AERO SERVICE, LTD.—OTTAWA

LOADER handles core material in continuous operation.

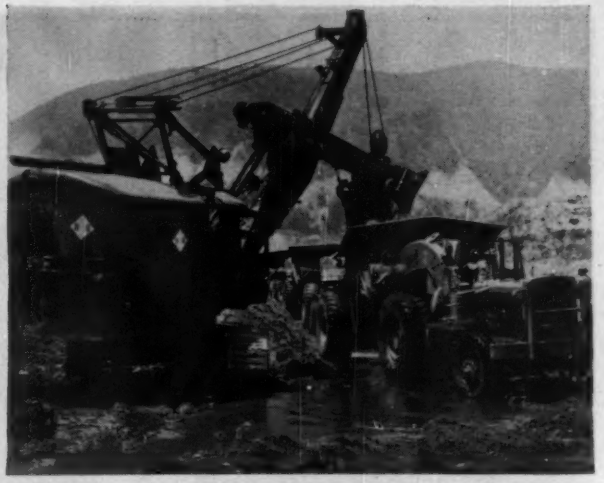

SHOVEL loads gravel that will form outer shell of dam.

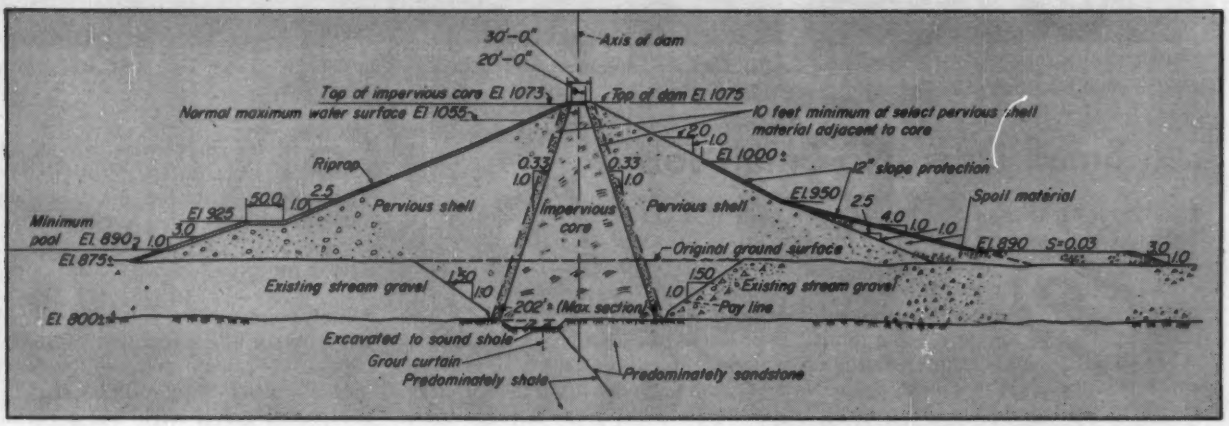

DAM CROSS-SECTION includes impervious core protected by rolled gravel shells. Foundation materials is well suited for rolled fill but probably not as readily adaptable to a concrete structure.

Small Dam Proves to Be No Small Job

Financing, construction techniques, oil seepage solved as Calif. district "goes it alone"

Santa Felicia Dam in Southern California is not a large structure, as earth-and-gravel-fill dams go. But there were a number of problems solved in the course of planning and construction of this 4,000,000 cu yd dam that make it a very special job:

- It was financed entirely by local funds—an unusual circumstance in itself in an area where smaller communities have the opportunity to get the U. S. government to bail them out of critical water situations.
- Permeability rates proved to be much lower than expected—but remained satisfactory.
- An admixture of pozzolanic cement replacement reduced cost of concrete.
- Oil seepage from a nearby active well field posed foundation problems.

Started in April, 1954, the dam is due to be completed late this year, in time to catch and put to use flood flows of the 1955-56 winter season. The work is a project of the United Water Conservation District that covers an area in the southern part of California's Ventura County totalling 213,000 acres, of which 143,000 are habitable or arable.

The district fronts on the Pacific Ocean some 80 miles northwest of Los Angeles. Major towns include Santa Paula, and Oxnard—around which are clustered three major military installations. Increased development of the area has resulted in increasing pumping from ground water supplies for both domestic and irrigation use, with attendant pumping cost and danger of seawater intrusion. (The coastal town of Port Hueneme has recently had to relocate one of its water supply wells a mile inland. Six other wells in the area have salted up in recent years.)

To cope with these problems, the United Water Conservation District was formed in 1950, taking in and supplanting an existing district (Santa Clara Water Conservation District) and other areas.

Engineers for the newly organized district found that two dams, one on Sespe Creek and one on Piru Creek, would yield enough new water to make up the expected deficiency. Result was an $18.5-million bond issue presented to voters in Dec. 1952, which failed to pass.

A re-analysis was made, and a new proposal presented in Oct. 1953. This bond issue was approved for just under $11 million. It called for construction of only Santa Felicia Dam on Piru Creek to develop 32,500 acre-ft of new water storage a year. Also included was cost of additional spreading grounds as well as pipelines and canals.

Officials of the district had investigated such alternate sources of supply as California's proposed Feather River Project, annexation to the Metropoli-

DRY CEMENT IS PACKED in foundation to close off oil seep.

OIL DRUMS measure gravel material permeability. Water from top drums flows through gravel filled bottom drums.

. . . Small Dam—No Small Job

tan Water District of Southern California, cloud seeding and sea water reclamation. All were rejected as either being too far in the future or not developed enough for dependability. The works now being built were designed so any one of these other potential sources can be utilized should it be desirable to do so in the future.

The district also considered possibility of seeking construction by some federal agency such as the Bureau of Reclamation or the Corps of Engineers. Conclusion was that the cost to the district might be greater. And there was no guarantee of early construction because of the politics involved in obtaining federal construction for a small local district. Local construction would guarantee local ownership and control—a factor that was considered very important by the relatively rich local area.

• **100,000-acre-ft reservoir**—The reservoir formed by Santa Felicia Dam has a capacity of 100,000 acre-ft. Stream flow is such that the reservoir is expected to fill about once in five years. Actually, runoff in this area usually follows a pattern of a number of dry years followed by a number of wet years. So it might be that the reservoir will fill several years in a row and then not fill for several years.

Releases for downstream use are handled by a 1,200-ft long, 60 and 66-in. dia outlet pipe through the dam controlled by two hollow cone valves.

The dam is located in a deep canyon—stream bed length is 1,030 ft while crest length is 1,260 ft. The spillway is cut into a shoulder on the right abutment. It has an ungated ogee crest discharging into a funnel-shaped chute. The downstream end of the paved chute cantilevers out over the hillside as a protection against erosion.

With a freeboard of five feet, capacity of the spillway is 105,000 cfs. When the reservoir is full to the point of overtopping the dam, spillway capacity is 157,000 cfs. This compares with maximum recorded flood in Piru Creek of 35,600 cfs.

The dam is a rolled earth-and-gravel fill. It has an impervious core of clay materials placed on a 0.33 on 1 slope. The core is protected by a pervious shell of compacted gravel with upstream slope varying from 2.25 on 1 to 3 on 1.

• **Low permeability**—Actually, the entire dam including both core and shell can be considered relatively impervious. Results to date indicate that the compacted gravel shell has a permeability of 200 ft per year—some authorities consider anything below one foot a day to be impervious. Permeability of the core is 0.024 ft per year. Relative permeability between the core and shell material provides

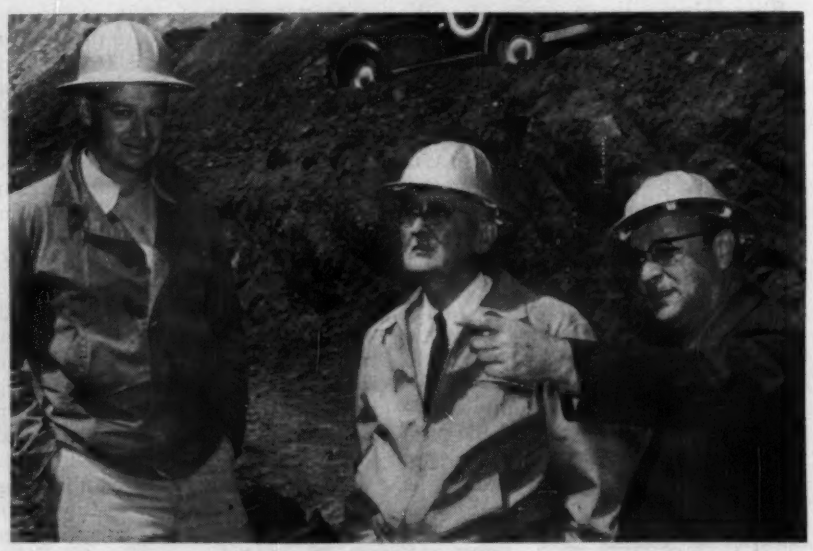

KEY PERSONNEL for district are Neville S. Long (left), Julian Hinds, and W. P. Price, Jr. Long was with Atkinson at McNary and Pine Flat Dams. Hinds helped build the Colorado River Aqueduct and served many years as chief engineer and general manager of the Metropolitan Water District of Southern California. Price was construction engineer for USBR at Canyon Ferry Dam.

LO-HED Reinforced Concrete Pipe for Culverts and Sewers

Greater Capacity . . . Faster, Easier Installation . . . Less Cost!

Elliptical LO-HED Pipe carries a greater flow than its round equivalent—in a minimum depth of cut with increased depth of cover. LO-HED Pipe is easier to lay, to grade and line. Smooth walls and tight joints insure maximum hydraulic capacity, with a minimum build-up of debris in the invert, even under low-flow conditions. Furnished in pre-tested strengths to answer any low headroom problem, including culverts under highways and railroads.

Write today for specifications on time and money-saving LO-HED Reinforced Concrete Pipe.

A full range of sizes in LO-HED Pipe is available for nearly all culvert and drainage installations. Shown above are the LO-HED equivalents of round pipe sizes 18″—24″—30″—36″—90″—120″.

AMERICAN-MARIETTA COMPANY
CONCRETE PRODUCTS DIVISION

GENERAL OFFICES
AMERICAN-MARIETTA BUILDING, 101 EAST ONTARIO STREET, CHICAGO 11, ILLINOIS PHONE: WHITEHALL 4-5600

DIVISIONS AND SUBSIDIARIES

B. C. Concrete Company, Ltd.
Concrete Conduit Company
Concrete Products Co. of America
Lamar Pipe and Tile Company
Lewistown Pipe Company
Universal Concrete Pipe Co.

SONOVOID®

FIBRE TUBES

for voids in concrete construction

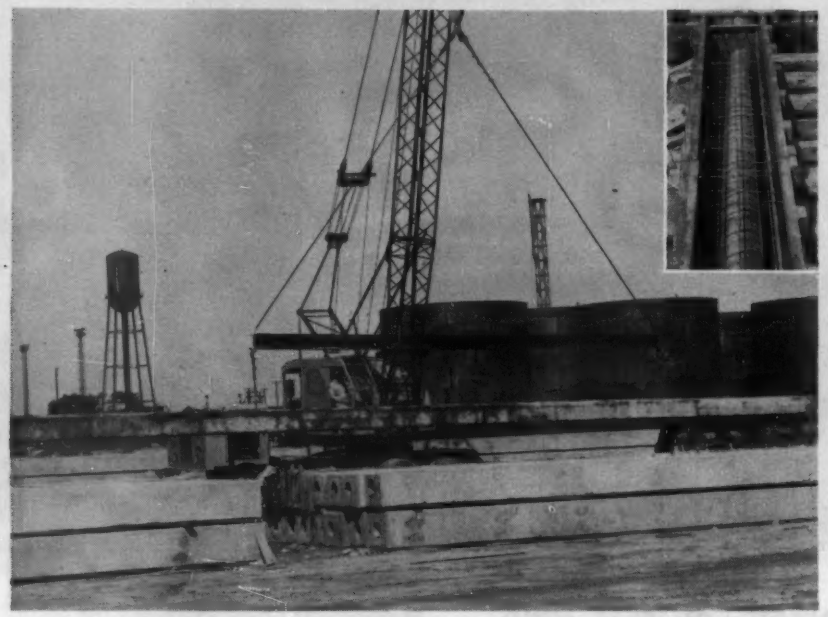

Esso Standard Oil Dock, Newport News, Va., developed and designed by Esso's Construction and Maintenance Div., New York. E. T. Hunter, Jamaica Concrete Products Co., Ltd., dolphin and pile design. Construction supervised by N. C. Beland, Supt. Const. & Maintenance, Va. Div., Esso. Tidewater Construction Corp., Norfolk, Va., contractors, Jack S. Lyles, Supt.

Precast concrete piles save two ways!

. . . low cost SONOVOIDS® make it possible

Prestressed precast concrete piles used in the construction of the Esso Standard Oil Company Dock at Newport News, Va. contain hollows formed by low cost SONOVOID Fibre Tubes.

SONOVOIDS saved concrete and money!

The finished lighter weight piles handled easier at no sacrifice of structural strength because SONOVOIDS displaced the dead weight of concrete at the neutral axis. Specifically developed for use in bridge deck, wall, floor and roof slabs and other structural units, precast or cast in place, low cost SONOVOIDS save concrete and reinforcing steel.

Available in sizes from 2.25" to 36.9" O. D. Can be sawed to your requirements on the job or ordered in specified lengths up to 50'. End closures available.

sonoco — SERVES THE WORLD — PAPER CARRIERS

REG. U.S. PAT. OFF.

See our catalog in Sweet's

For complete technical data and prices, write

SONOCO PRODUCTS COMPANY

Construction Products Division

LOS ANGELES, CAL. 5955 SOUTH WESTERN AVE. — HARTSVILLE, S. C. — MAIN PLANT — MONTCLAIR, N. J. 14 SOUTH PARK STREET

AKRON, IND. — BRANTFORD, ONT.

MEXICO: Sonoco de México, S. A., Apartado 10239, México, D. F.

a very satisfactory basis for design of the structure. In this instance, both shell and core are less pervious than anticipated in the design so the permeability ratio is in the same general range. (Design was based on a shell permeability of 7,300 ft per year and a core permeability of 0.365 ft per year.)

In evaluating the work during construction a means of measuring permeability of the gravel layers was devised. This centered around pairs of 55-gal oil drums. The top drum was filled with water and the bottom drum with gravel compacted as closely as possible to that in the dam. The water in the top drum was led to the bottom of the bottom drum to flow up through the sample. Measurement of water drop in the top barrel gives rate of flow. Head loss through the sample is determined by means of piezometers.

In general, fill operations are routine. Impervious material is loaded by tractor-hauled elevating loader and hauled in 13- and 17-cu-yd bottom dump earth movers. Shell material moving is a shovel and truck operation. Borrow areas for both types of material are available within a mile haul distance. Fill rates are roughly 50,000 cu yd of impervious material a month and 200,000 cu yd of shell material a month.

Compaction of impervious material is based on a compactive effort of 20,000 ft-lb per cu ft. This means six to eight passes of a 50-ton pneumatic roller or 10 to 14 passes of a USBR standard sheepsfoot roller are needed to roll an 8-in. uncompacted layer. District engineers have found that better results are obtained by the pneumatic roller.

In the critical area next to abutment rock where tractor hauled compactors cannot operate, compaction is accomplished by driving a loaded end-dump truck back and forth as close to the rock as possible. Hand-operated pneumatic tampers are used only where rubber tires won't reach.

• **Concrete design**—In an earthfill dam project of this sort, concrete yardage is relatively limited—totaling in this case only 32,650 cu yd. But careful attention was given to concrete design to offset aggregate reactivity. This was accomplished by replacing 15 to 18%, by weight, of the cement with a pozzolan (including structural type concrete in spillway chute walls). Result was also a significant saving.

In addition to cement replacement, the designers desired to use an air entraining material that would improve workability. This would permit a decrease in the water-cement ratio. Such a decrease would mean that the desired

strength could be obtained by using less cement. However, it was found that the available aggregate supply together with the particular pozzolan used (Airox) would inhibit the action of vinsol-resin type admixtures. But this effect was not noted on calcium-lignosulfonate-based admixtures, such as Master Builders Pozzolith. Quantity of Pozzolith added is 1.9 lb per cu yd for 3,000 psi concrete and 1.6 lb per cu yd for 2,500 psi concrete. These quantities are 0.5% of the cement weight.

• **Oil troubles**—Santa Felicia Dam is in the vicinity of an active oil field. One well in the reservoir area was purchased and plugged off. The former owner still retains the mineral rights and may drill a new well on the reservoir bank.

To close off water and oil along the center line of the dam, a three-stage grouting program was undertaken. Holes were spaced generally at 10-ft centers with first drilling to a 20-ft depth. After grouting, the holes were redrilled to 60-ft depth and regrouted. Then every fourth hole was again redrilled to 120-ft depth and regrouted. Most of the grout take was confined to the first 20 ft. Due to a large number of breakouts in the channel section of the cutoff trench, a second row of grout holes was drilled 10 ft downstream from the first.

When the foundation rock was uncovered, many oil seeps were encountered. Most of these came from cracks in the rock and are attributed to reduction of pressure on the foundation by removal of overburden. By the time operations were to the point where filling was to start, many of the seeps had dissipated. The engineers are convinced that the pressure of the dam will be substantially greater than pressure causing the seeps. So the problem was how to handle the seeps until pressure from the fill could be built up. It was found that the seeps could be controlled by dry-packing with a heavy neat cement mortar.

For the United Water Conservation District, Julian Hinds is general manager and chief engineer, W. P. Price, Jr., is assistant chief engineer and Neville S. Long is construction engineer. Detailed designs of the dam were made by the hydroelectric division of Bechtel Corp. under the direction of M. L. Dickinson. Construction of the dam under a $3.5-million contract is being carried out by a joint venture of D & H Construction Co., Macco Corp., and M. H. Hasler Construction Co. Project sponsor is W. J. Darkenwald, vice president and general manager of D & H Construction Co., and project manager is George J. Renauld.

SONOTUBE®

FIBRE FORMS

for round columns of concrete

PHOTO—Dauphin Island Bridge, Alabama. Blount Bros. Const. Co., Montgomery, Ala., and Kansas City Bridge Co., Kansas City, Mo., joint contractors and developers of method of pile encasement. Frank W. Currey, Gen'l. Supt., W. D. Tryon, Proj. Eng. Alabama Hwy. Dept., J. W. Chambers, Ch. Bridge Design Engr., designers.

Round concrete-encased piles save money!

. . . low cost SONOTUBES® make it possible

The use of SONOTUBES as forms for encasing the steel H-piling, along with a job-developed air and water jetting device, made it more economical and efficient to use the 20" dia. circular encasements than the standard 16" square encasement. Two pours were used to encase the piles; the first one, below water, was from 2' below ground line to 1' above water level.

Because of the presence of sway braces, above water, the SONOTUBES were slit and notched with an electric saw then fitted over these braces. The forms were clamped with rachet type column clamps, then poured.

Another advantage of the SONOTUBES was that they eliminated external curing and also kept the fresh concrete from exposure to sea water. Details of the forming and pouring methods are available on request.

Write for information on the use of SONOTUBES for the encasement of wooden piles, newly driven or under existing docks. Sizes from 2" to 36" I.D., up to 50' long.

See our catalog in Sweet's

SONOCO PRODUCTS COMPANY
Construction Products Division
LOS ANGELES, CAL. 5955 SOUTH WESTERN AVE. — HARTSVILLE, S. C. — MAIN PLANT — MONTCLAIR, N. J. 14 SOUTH PARK STREET
AKRON, IND — BRANTFORD, ONT

sonoco SERVES THE WORLD
PAPER CARRIERS
REG. U.S. PAT. OFF.

MEXICO: Sonoco de México, S. A., Apartado 10239, México, D. F.

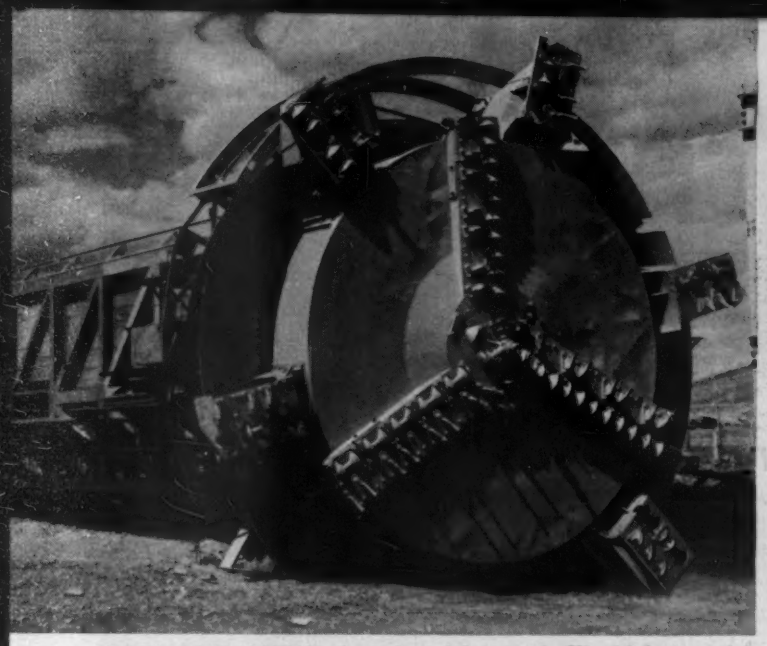

MECHANICAL MARVEL shows its mighty teeth. The 26-foot cutting face can be raised, lowered, and swung from side to side to alter direction of cut. Note concentric cutter heads and shale scoops.

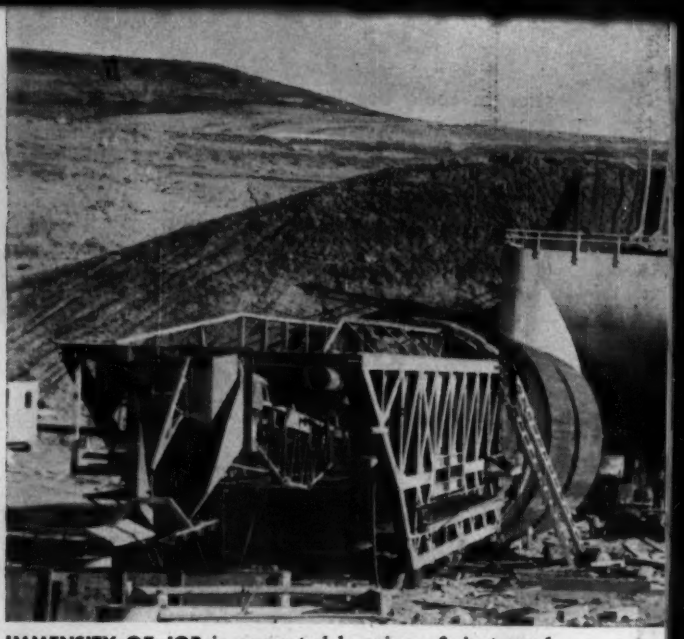

IMMENSITY OF JOB is suggested by view of six tunnel entrances bored in record time by new mole (above). Reinforced concrete tunnels average 1830 feet long.

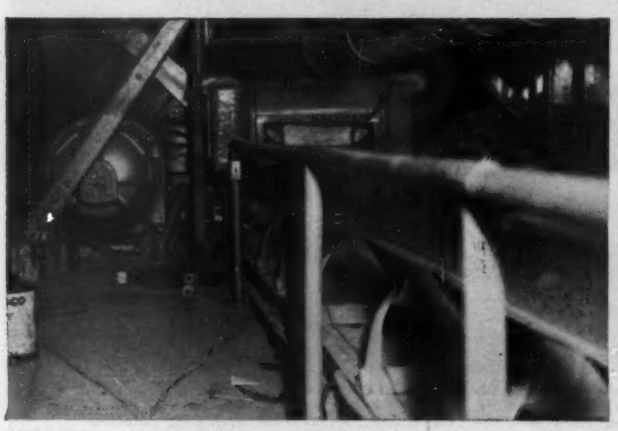

DIGGER'S RELIABILITY depends largely on performance of two 200-hp G-E wound-rotor motors driving cutters through gear mechanisms. Conveyor carries rubble to cars at rear of mole.

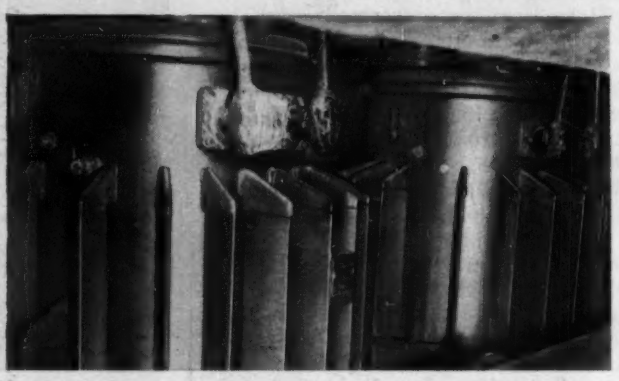

THREE COMPACT 167-kva G-E transformers in digger step down power supplied by cable from diesel-generator outside.

PROTECTION of electrical system is provided by dead-front panel with circuit breaker and ground relay. Compact General Electric equipment had to fit into tight space available.

G-E MOTOR CONTROLLERS provide short circuit protection and permit centralized push-button control at operator's station.

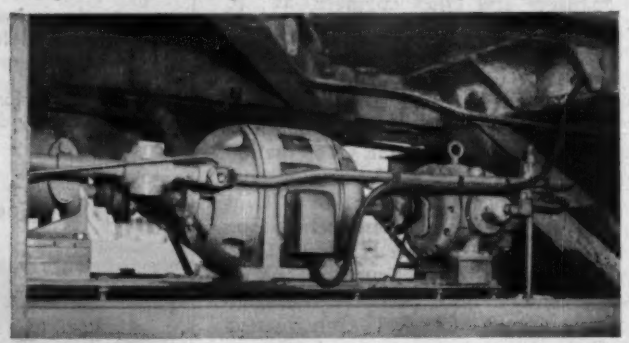

EXACT FORWARD MOVEMENT into rock face is accomplished with highly dependable G-E 25-hp motor furnishing power for hydraulically operated "feet" which propel mole on tracks.

GENERAL ELECTRIC

Electrically powered by General Electric . . .

New giant "mole" chews tunnels 26′ wide over 4 times faster than previous methods

Mittry Constructors' tunnel digger illustrates high productivity possible with electrified tools

At the Oahe Dam of the Missouri River development near Pierre, S. D., an electrified tunnel digger 90 feet long has slashed tunneling time, costs and dangers. This imaginative use of electricity is even more successful than anticipated by its pioneering designers. James S. Robbins and Associates, Chicago, designed and built the "mole" for Mittry Constructors of Los Angeles under license from Goodman Mfg. Co., Chicago. According to Robbins, help from J. R. Porter, G-E engineer, greatly contributed to completing the digger two months ahead of schedule.

Problem was extremely difficult: How to dig six tunnels each over one-third mile long without exposing shale more than 30 days? Longer exposure would dry and dangerously weaken shale.

Solution was new electrified tool, which dramatically cut tunneling time to less than one fourth that needed by other methods. Digger was designed with two motor-driven concentric revolving cutter heads with large shale scoops on outside ring. Sections revolve in opposite directions to equalize cutting torque. Scoops dump shale through hopper to conveyor belt. Every four feet, a large I-beam is rammed into shale walls for support. Concrete is then pumped into forms to finish walls.

Down time has been practically zero. Despite conditions such as a constant humidity of 95% in the tunnels, G-E equipment has reliably powered this giant mole continuously and efficiently.

Electrified construction tools can pay off the same way for you too. Let your G-E Apparatus Sales representative show you how G-E equipment, backed by G-E engineering service, can raise tool productivity. Contact your nearest G-E Apparatus Sales office, or write General Electric, Sect. 664-37, Schenectady 5, N.Y.

Engineered Electrical Systems for Heavy Construction Tools

GENERAL ELECTRIC

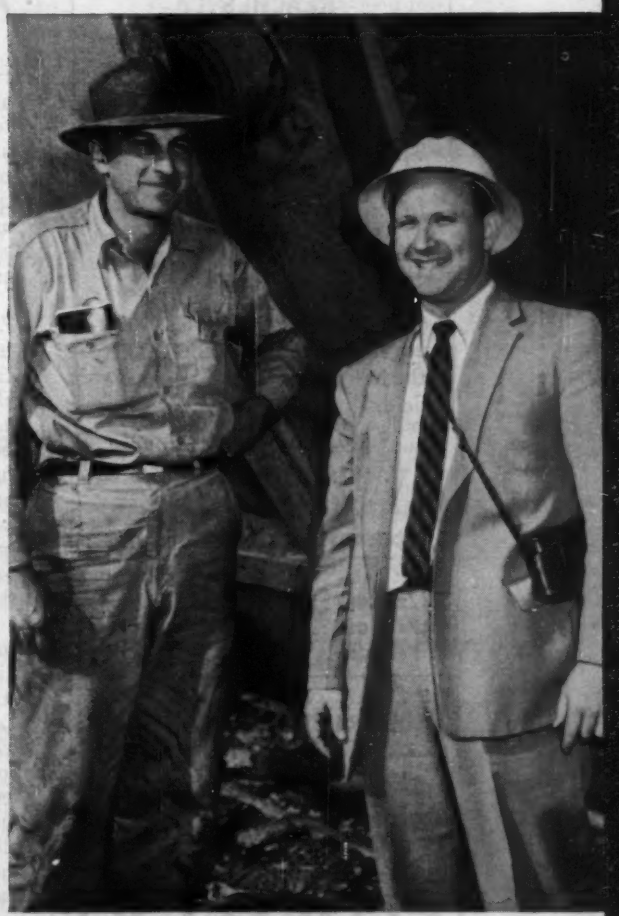

STANDING BY MOLE'S "FACE" are Bill Mittry of Mittry Constructors and Jim Dillman of G.E., who helped plan the new tunnel giant.

If you're not in by OCT. 15..you're out of touch for *A FULL YEAR*

with over 10,000 of the most important specification writers, buyers and selectors of CONTRACTORS, SUB-CONTRACTORS, MATERIALS AND EQUIPMENT.



CONTRACTORS REGISTER REACHES...

The biggest market in the Construction Industry where the big jobs are planned and executed for the entire nation.

The BLUE BOOK (published annually since 1913) is referred to constantly by the leading ARCHITECTS, GENERAL CONTRACTORS, ENGINEERS, GOVERNMENT AGENCIES, etc.

Over fifteen hundred (1,500) advertisers find the REGISTER the best inquiry producer in the field.

• *You actually get national coverage at a regional rate. Select your space now.*

COST FOR ENTIRE YEAR

FULL PAGE .. 5x7½ inches ..	$265.00
1/2 PAGE ... 5x3¾ inches ..	160.00
1/4 PAGE ... 5x1⅞ inches ..	95.00
1/8 PAGE ... 5x15/16 inches ..	60.00

Call or Write

CONTRACTORS REGISTER

60 E. 42nd St., New York 17, N. Y.

MUrray Hill 2-6598

CONTRACTORS BUILDING AND CONSTRUCTION REGISTER

NEW PRODUCTS

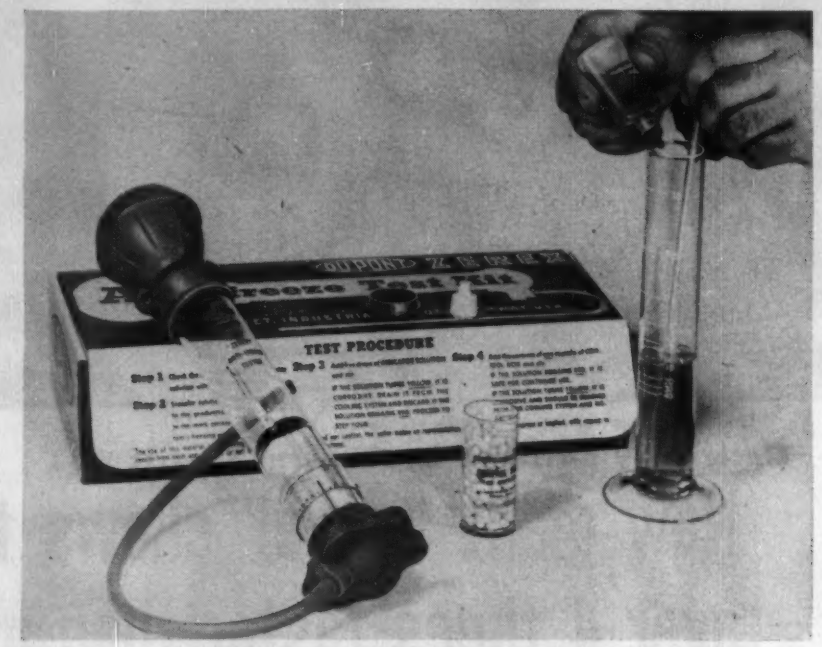

Analyzer Can Cut Anti-Freeze Costs

Estimates indicate that construction companies can cut their annual anti-freeze and cooling system maintenance costs with a Zerex anti-freeze analyzer. With it, maintenance supervisors can determine accurately and quickly which anti-freeze solutions are safe to hold over for another season, and which have become corosive and thus should be discarded.

According to the manufactures of Zerex—an ethylene glycol-base anti-freeze — permanent-type anti-freeze can turn acid in the cooling system after one season's use. Air and exhaust gases seeping into the system break down the glycol, forming harmful acids, and it is a big job for the inhibitor in the anti-freeze to neutralize these acids. Eventually, when the inhibitor becomes depleted, the acid solution can cause severe corosion of the engine block and radiator metals.

The corosiveness of an anti-freeze solution after one winter's use is in direct relation with the amount and strength of rust inhibitor still present. Laboratory tests have shown that when all of the inhibitor is lost, the corosion rate on iron is just a little less than ⅓ in. per year. It is evident, therefore, that the amount of reserve alkalinity of permanent anti-freeze must be determined accurately before the decision to re-use the anti-freeze can be made.

With the Anti-Freeze Analyzer, the reserve alkalinity of any Zerex-water solution can be determined accurately, right on the spot. The kit can be used by maintenance men, following printed instructions, and the test can be done in two or three minutes.

Here is how the analyzer works. Using a special hydrometer in the kit, the freezing point of the used anti-freeze solution is first determined. This solution is then transferred into the graduated flask, up to the mark corresponding to the freezing point of the solution. Five drops of special indicator solution are added and stirred. If the used solution in the flask turns yellow, it is already acid and the cooling system from which the sample was taken should be drained, and the solution discarded.

If the solution does not turn yellow when the indicator is added, it's a sign that there is still some inhibitor left. The next step is to determine how much active inhibitor remains. This is done by adding to the solution in the flask the contents of one of the control acid capsules; these capsules contain an accurately weighed amount of the control acid. If the solution does not turn yellow it is safe to re-use because it still has ample reserve alkalinity left. However, if the control acid turns the solution yellow, most of the reserve alkalinity has been lost, continued use of the anti-freeze solution is dangerous and the cooling sys-

tem should be drained immediately.

In this manner, maintenance men can detect solutions with spent inhibitors and thus save the cost of expensive replacement of radiator cores or water pumps and safely re-use many gallons of Zerex anti-freeze.

The analyzer comes complete with a hydrometer, graduated flask, indicator liquid, 100 control acid capsules and a glass stirring rod. Complete instructions are printed on the container. Available only at Du Pont anti-freeze jobbers, the cost is $8.95.

It is important to note that the analyzer works only with Zerex; it is not designed for use with any other brand of anti-freeze. The indicator solution and the control acid capsules have been specifically compounded to react with the manufacturer's own formulas. E. I. du Pont de Nemours & Co., Inc. Wilmington, Delaware

New Instrument Can Be an Aid In Designing Highways

The Gerber Derivimeter is an instrument designed to obtain the derivative or slope of a plotted curve.

The instrument yields the normal as well as the slope directly, without computation, and it is not necessary to know the exact equation of the graphical curve to determine derivatives. However, if an equation should be available, a simple plotting of the area of interest on coordinate axes allows the use of the Derivimeter to determine the slopes. Unless the function involved differentiates very simply, the use of the Derivimeter is said to result in a saving in time even when the exact equation is already known.

In addition to the obvious uses for the instrument in obtaining slopes and derivatives, it has application in such specific problems as layouts involving tangents and intersections to the curve lines in road planning, and the compiling of velocity and acceleration data from displacement curves.

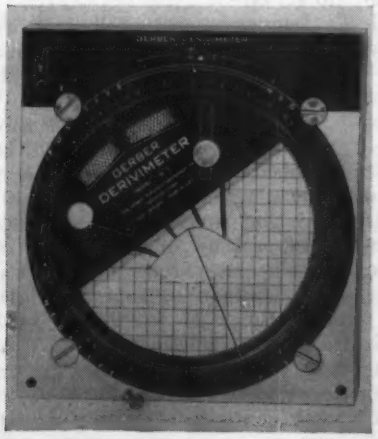

There are few moving parts, and the instrument is reported to remain in calibration and retain its accuracy over a long period of time. A flexible flat spring is mounted on a pivot at its center, the pin parallel to the flat side of the spring. A light metal indicator is mounted perpendicular to the spring at the center, also being perpendicular to the pivot pin. Since the other end of this indicator registers on a circular scale, any deflection of the spring or rotation about the pivot pin is immediately transmitted to the scale. The scale is divided into four quadrants to read the sign as well as the numerical value of the derivative. The deflection of the spring is controlled by the sliding of two widely spaced rods contacting the back of the spring. Two probes, located near the pivot also contact the back of the spring, giving fine adjustment control to the shape of the flexed spring.

In operation it is necessary only to place the pivot at the point of interest on a given curve, adjust the spring to coincide with the shape of the curve, and the derivative can be read from the scale.

In using the Derivimeter the square frame containing the movable indicator mechanism is oriented with the grid lines of the curve being measured. The pivot pin is located on the point of the curve where the derivative is to be taken. After the preliminary adjustment of the unflexed spring to a position approximately tangent to the curve, the spring is adjusted to conform to the shape of the curve. The derivative or slope is read from the circular scale. By orienting the frame at 90 deg counter-clockwise to the derivative position, the normal to the curve can be read. The Gerber Scientific Instrument Co., 162 State St., Hartford, Conn.

Inorganic Coating Makes Possible "Cold Galvanizing"

Protection equal to galvanizing is the claim made for Dimetcote–a metallic zinc coating for structural steel. Completely inorganic, the material is said to contain no oils or resins although it can be applied with either a brush or spray.

According to the manufacturer, the coating cathodically inhibits contiguous areas of bare steel.

Further, when it is applied, a reaction takes place at the surface which produces a chemical as well as a physical adhesion.

It is reported that only one coat is required for most applications and material cost is less than 6¢ psf. Amercoat Corp., 4809 Firestone Blvd., South Gate, Calif.

IRVING GRATINGS Preferred!

BECAUSE THEY FIT PERFECTLY!



1. Our Engineering Dept. lays out complete flooring plan from your floor plan, sketch or overall dimensions.
2. A shop drawing showing layout of sizes, shape and cut-outs for obstructions is submitted for approval before fabrication.

3. Each panel is carefully checked by our inspectors before shipment and is clearly marked for quick installation.
4. We furnish erection drawings showing location of marked panels.

These are only a few of the services that insure perfect fit when you specify IRVING GRATING.

•

Pioneers of the Grating Industry

•

Ask for Illustrated Catalog

IRVING SUBWAY GRATING CO., INC.
ESTABLISHED 1902

OFFICES and PLANTS at
5063 27th St., Long Island City 1, N. Y.
1863 10th St., Oakland 20, California

DOWN TO FUNDAMENTALS

SMALLER AND BETTER

KERN'S NK3 Precise Engineers' Level. The world famous engineering tool especially designed for accurate leveling.

The NK3 offers over 100 years of Swiss Master Craftsmanship and the latest technical achievements compressed into 4 lbs. of maximum precision, operational efficiency and economy.

- Mean leveling accuracy per mile (normal conditions) ± .008 Ft.
- Coincidence bubble is viewed directly through 30X telescope, allowing constant check on bubble centering while reading rod.
- Ready for use right out of the case. Highest precision leveling with coincidence spirit level and tilting screw. Coated optics give increased brilliance and contrast in the image.

MORE RELIABLE READING IN LESS TIME!

Ask for Detailed Brochure NK527-1

•

SERVICE DEPARTMENT
FACTORY TRAINED PERSONNEL

Kern SWISS

The FINEST in SURVEYING EQUIPMENT

KERN INSTRUMENTS INC.
120 Grand St., White Plains, N.Y.

INTERNATIONAL

Electric Office Building Goes Up

In keeping with its future tenant, Vancouver's newest skyscraper will incorporate the latest in electrical devices. Built to house the British Columbia Electric Co., the 21-story glass and enamel structure will include electrically-operated venetian blinds, electronic elevators, variable ceiling illumination, and electrically-developed steam heating.

One of the really unique features of the building will be the method of overcoming excessive solar heat transmitted by the 50,000 sq ft of double paned glass which forms part of the building's skin. Tiny venetian blinds composed of ½-in. slats of bronze between the two slabs of glass will be closed or opened at the flick of a switch.

Six automatic elevators in two banks will provide vertical transportation. They are of the self-service, high-speed type with electric eyes to prevent closing of the doors on a passenger. The elevator system also schedules itself to accommodate changes in traffic flow. If an elevator becomes overloaded, a recorded voice announces the fact and asks someone to get off.

Luminous, acoustically treated ceilings will offer variable illumination to suit the type of work being carried out in each department.

Heat will be distributed through the air conditioning system with steam supplied by electrical energy. A steam generator will be used which will produce and store steam during periods of off-peak use of electricity. Air will be temperature-controlled and washed with constant temperature maintained at all times.

Electric cables will be placed under adjacent drives and sidewalks to remove snow and ice.

In contrast to existing downtown

office buildings, the new structure will avoid "canyonizing" adjacent streets. Instead of building to the property line, the structure will be set back and will occupy less than three-quarters of the total lot area and this only to the third story. Above this a tower will rise another 19 floors, occupying only one-quarter of the total lot area.

The central core of the building is designed in the shape of an elongated, truncated diamond with a 200-ft major axis. From the core, which is to be built of reinforced concrete, the tower floors will be cantilevered to provide unobstructed floor space. The arrangement makes it possible to locate all offices no further than 15½ ft from a window.

The floors and ceilings are designed so that office partitions can be installed or moved at 39-in. intervals in two directions. This is to provide for internal flexibility. The building, expected to be completed in 1957, will, it is estimated, take care of staff increases until 1975 with room for 1,200 office workers. However, there is space at the rear of the building for additional expansion.

Contract for the $6.5 million building has been awarded to John Laing & Son (Canada), Ltd. The Laing firm, which moved to Vancouver to develop the Annacis Island industrial estate, beat out five other firms with a low bid of $1,380,251 for structural work. Laing will also coordinate $5 million worth of plumbing, electrical and air conditioning subcontracts which will be let out progressively.

Design of the 360,000-sq ft structure was developed by Tom Ingledow, BCE vice-president and executive engineer, together with a team of company engineers and architects headed by Ned Pratt of Sharp & Thompson Berwick, Pratt.

Hongkong in the Midst of "Skyscraper" Building Boom

Hongkong is approaching an all time high in construction—not only in quantity but in altitude as well.

According to latest reports, a 24-story structure will be constructed at a cost of $1 million. The structure, which will occupy 40,000 sq ft, will tower ten stories above the existing tallest building, the Bank of China.

In the last year, the building rate of tall structures has increased sharply. At least ten, between 10 and 20 stories ("skyscrapers" along Hongkong's historically squat skyline), are either in the course of going up or have recently been completed. A dozen more within the same altitude range are planned for the coming year.

Designed to fit the space and the need!

"Buffalo"

HEATING, VENTILATING AND FRESH AIR UNITS

Here's complete flexibility and assured results in planning your heating, ventilating and makeup air installations. Compact, narrow "Buffalo" Highboy units can easily be mounted on the floor next to walls. Where floor space is at a premium, "Buffalo" Lowboy suspended units provide accurate, efficient heat distribution over any desired floor areas. All models available with filters and bypass dampers. "Buffalo" swivel outlets permit accurate aim of air stream, and the "Buffalo" mixed-flow fans are so stable in performance that long duct runs may be connected to the outlets. WRITE FOR BULLETIN 3704A for full details, including handy diagrams and tables showing you exact models to choose for any results you desire. Write today!

WALL-HUGGING HEATER for close-quarter jobs like the installation above. Note sectional construction for easy installation and servicing.

HEAT WITHOUT REDUCING FLOOR SPACE! Below, a "Buffalo" Flat Suspended Lowboy keeps a warehouse warm and dry without reducing storage space.

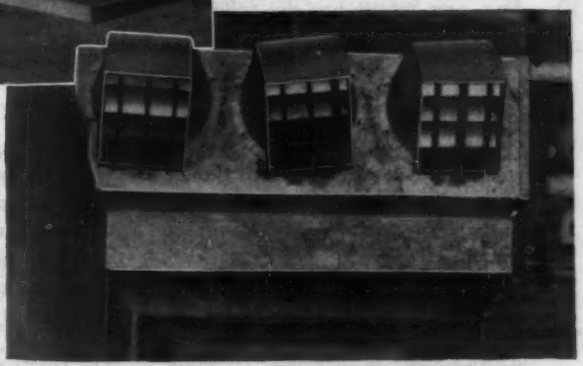

HEATS — VENTILATES — FILTERS! Highboy unit equipped with filters, dampers and mixing chamber. Extended outlets have horizontal and vertical louvers. Also available in a flat suspended window unit for makeup air.

BUFFALO FORGE COMPANY

163 MORTIMER ST. BUFFALO, N. Y.

PUBLISHERS OF "FAN ENGINEERING" HANDBOOK

Canadian Blower & Forge Co., Ltd., Kitchener, Ont.

Sales Representatives in all Principal Cities

VENTILATING AIR CLEANING AIR TEMPERING INDUCED DRAFT EXHAUSTING
FORCED DRAFT COOLING HEATING PRESSURE BLOWING

This new Streamliner 400

...has wide versatility, big capacity

...compact in size, low in cost

The new STREAMLINER 400 was designed to process any type of print, on any material, in a range of sizes up to 42" in width. It prints at speeds of from 1 to 24 feet a minute.

Low in cost, economical to operate, the Streamliner 400 is loaded with new features, and has no competition with any whiteprinter in its price class.

This new model has the following outstanding advantages:

Synchronized printing & developing . . . permitting continuous operation with roll stock.

Speed control . . . for quick, positive changes of running speed, from 1 to 24 feet per minute.

Instant reversal . . . easy to correct alignment errors, and permits removal of extraneous materials.

Tempered plate glass feedboard . . . gives operator clear view of stacking.

New mercury vapor lamp . . . is more efficient, and has a balanced cooling system that assures uniform exposure.

Pressurized evaporator tube . . . with automatic controls, provides uniform developing, at top speed.

Developer control dial . . . can be manually set for the best developing of any sensitized material.

Positive pickoff . . . plastic fingers lift prints off printing cylinder.

Exhaust timer . . . blows off heat and vapors after operation has stopped.

THE basic simplicity of design and construction also results in minimum maintenance. For any company which requires versatility *and* capacity, the 400 can show definite savings in time and print costs. And its price will not bulge your budget.

Ask the nearest Ozalid distributor *(see phone book)* for a demonstration. Or write for details to 151 Ozaway, Johnson City, N. Y.

OZALID — A Division of General Aniline & Film Corporation . . . *From Research to Reality*

OZALID

MEN AND JOBS

M. A. Ellsworth

Fluor Corp. Announces Organizational Change

The Fluor Corporation, Ltd., Los Angeles, Calif., will combine its engineering and construction operations into one division, which will be headed up by M. A. Ellsworth as vice president and general manager. The organizational change becomes effective Nov. 1.

Ellsworth has served as vice president in charge of the sales division for the last three years. He joined the company's sales staff at Tulsa, Okla., in 1940 and was named Tulsa district manager in 1944.

Among those reporting to Ellsworth in his new post will be J. G. Marshall, vice president, general engineering; W. P. Downey, vice president, construction; and J. P. Kneubuhl, vice president, engineering and construction sales.

Joint Venture To Assist U. S. Air Force in England

The architectural-engineering joint venture of Frank Grad & Sons of Newark, N. J., and Seelye Stevenson Value & Knecht of New York City has received a one-year contract for United Kingdom work from U. S. Air Forces in Europe.

With headquarters to be established in London and regional offices in Abingdon, Newmarket and Doncaster, it will assist the Air Force in supervision and inspection of construction on Third Air Force installations in England.

The project will employ 34 Americans and 17 British nationals in administrative and clerical categories. Architects and civil, electrical and mechanical engineers will comprise the

American contingent. Most of the specialists in the regional offices will be assigned to field work.

For nearly four years, the joint venture has been engaged in the design and construction supervision of USAFE jet air bases in northeastern France, comprising part of the NATO defense system. The $125 million construction program includes installations at Toul, Chaumont, Chambley, Brienne Le Chateau, Chenevieres and Chalons Vatry.

Adm. Karo Is New Director Coast and Geodetic Survey

H. Arnold Karo has succeeded Adm. Robert F. A. Studds as director, U. S. Coast and Geodetic Survey. His appointment by President Eisenhower included promotion to rank of rear admiral.

Adm. Karo entered the commissioned service of the bureau in 1923, after obtaining a civil engineering degree from the University of Nebraska, and has served it continuously except for World War II duty with the Army Air Force. For the last four years, he has been chief of the chart division.

Elected An Officer In Pittsburgh Firm

Frank L. Wilhelm has been elected assistant vice president of The Rust Engineering Company, Pittsburgh, Pa. His headquarters will be in the home office, where his duties will be of an operational nature.

Wilhelm joined the Rust organization in 1936 as a field office manager and has served as superintendent and project manager on major construction projects. His most recent field assignment was as procurement manager for the company's construction work at Oak Ridge, Tenn.

F. L. Wilhelm

There is No Worry about Failures or Maintenance Costs with TRU-LAY *PUSH-PULL* Remote Controls

• On Construction Equipment they are being adopted by an ever-increasing number of engineers because they are Rugged, Trouble-Free, Accurate and Adaptable to all sorts of mechanical situations.

Long Life is a matter of record. We have never heard of a TRU-LAY *Flexible* PUSH-PULL CONTROL wearing out in normal service. Failures, that sometimes harass users of more complex controls, are eliminated by the use of these simple, positive-action Push-Pulls.

Dependable Operation of these controls is a certainty, even under the most adverse conditions . . . HOT as jet engines (Note: TRU-LAY PUSH-PULLS are actually performing on hot jet applications) . . . COLD to 70° F. below ZERO . . SOAKIN' WET . . . ABRASIVE . . . or just plain TOUGH.

Freedom from Trouble is assured because of such features as . . . full protection of the inner, working member by the tough flexible conduit . . . lubrication of the working member *for life* during assembly . . . seals that keep moisture, dust and other foreign matter out of the unit . . . cold swaging of fittings that makes them integral parts of the control unit.

Accuracy is inherent in the basic design of TRU-LAY PUSH-PULLS. They are precision products, not gadgets.

Capacity ranges from light jobs up to jobs of 1,000 lbs. input. These Push-Pulls will handle jobs 150 feet or more from the control point.

Adaptability to all sorts of mechanical situations explains, in large measure, the use of TRU-LAY PUSH-PULLS on literally hundreds of different machines and equipment. The *flexibility* of these controls makes it possible to provide positive, remote-action whether anchorages are fixed or movable . . . it damps out noise and vibration . . . and reduces the number of working parts.

• • •

TRU-LAY PUSH-PULLS are "Solid as a rod but *Flexible* as a wire rope." This flexibility makes it possible to snake around obstructions . . . permits the ideal arrangement of all elements of remote controls.

***Advantages** of Tru-Lay Push-Pull flexibility and simplicity are pictured below*

TRU-LAY PUSH-PULL — **MECHANICAL LINKAGES**

Simple
One Moving Part
Life-Time Service
Life-Time Accuracy
Low over-all Cost
Noiseless





Complex
Many Parts
Many Points of Wear
Increasing Back-Lash
Loss of Accuracy
Vibration
Rattles

Widely Used on Construction Equipment

• These accurate and dependable Remote Controls are used on a wide range of Construction Equipment . . . Tractors and their accessories, Power Shovels, Winches, Graders, Road Oilers, Dump Trucks, Snow Plows, Engine-driven Pumps, Crushers, etc.

On such equipment TRU-LAY PUSH-PULLS are used for the remote control of Transmissions, Hydraulic and Air Valves, Brakes, Clutches, Throttles, Chokes, Governors, Power Take-Offs, and on many other applications.

Our DATA FILE will answer your further questions
Write for a copy, without obligation

ACCO

AUTOMOTIVE and AIRCRAFT DIVISION
AMERICAN CHAIN & CABLE

601-F Stephenson Bldg., Detroit 2
2216-F South Garfield Ave., Los Angeles 22 • 929-F Connecticut Ave., Bridgeport 2, Conn.

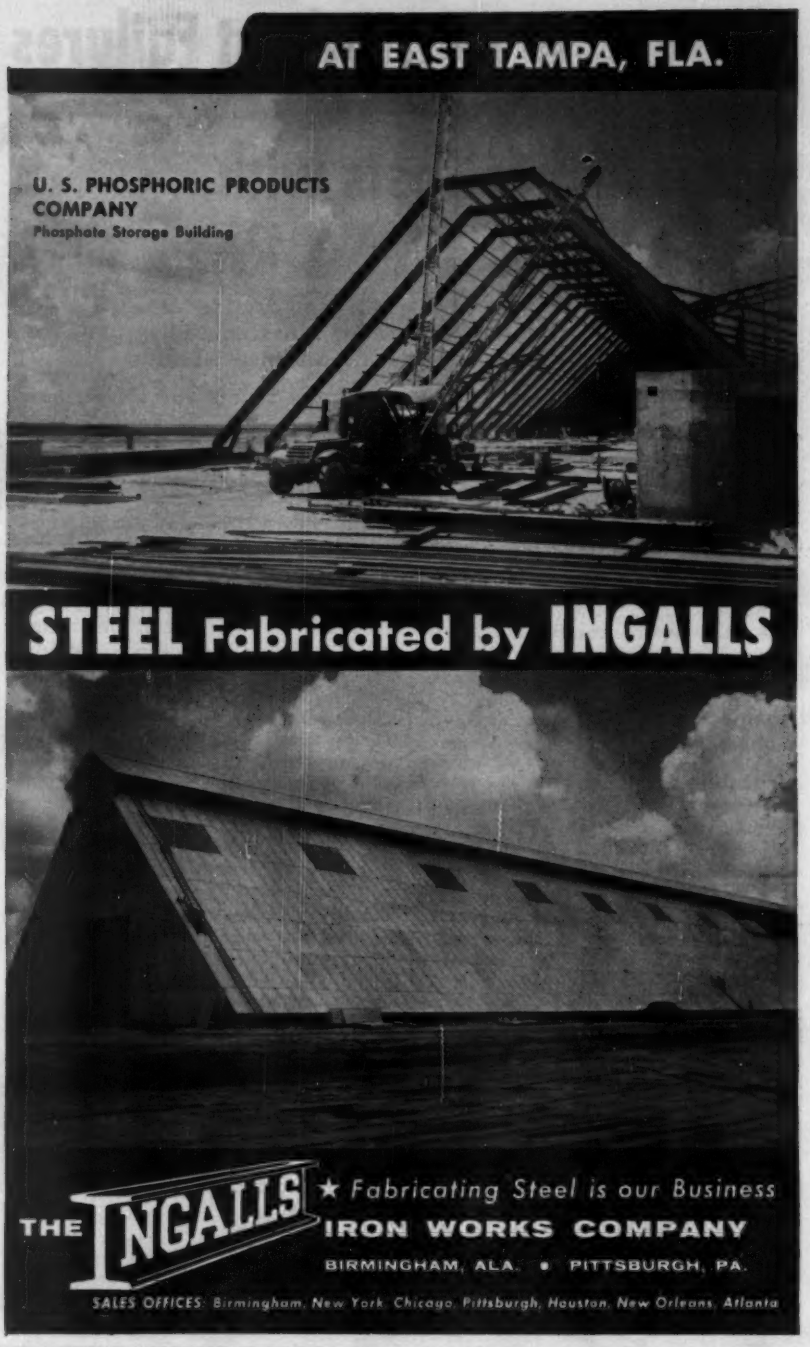
AT EAST TAMPA, FLA.
U. S. PHOSPHORIC PRODUCTS COMPANY
Phosphate Storage Building
STEEL Fabricated by INGALLS
THE INGALLS IRON WORKS COMPANY
★ Fabricating Steel is our Business
BIRMINGHAM, ALA. • PITTSBURGH, PA.
SALES OFFICES: Birmingham, New York, Chicago, Pittsburgh, Houston, New Orleans, Atlanta

"Gunite" ..... the sand-cement product of the "CEMENT GUN," for Concrete and Masonry Repairs, Pre-Stressed Tanks, Steel Encasement and for lining Reservoirs, Sewers and Tunnels.
CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES—ALLENTOWN, PENNA., U.S.A.
MANUFACTURERS OF THE "CEMENT GUN"

MEN AND JOBS

Reclamation Bureau Names Members of Project Staff

Albert S. D'Alessandro has been named acting project construction engineer for the Bureau of Reclamation's Palo Verde Diversion Project on the Colorado River near Blythe, Calif.

Formerly a field engineer on the second barrel of the San Diego Aqueduct, he has been doing pre-construction work on the Palo Verde project since June at the Boulder City, Nev., office.

Other staff members in the new Blythe office include Howard Burr, office engineer, and William Gage, field engineer—both transferred from the Parker-Davis Project headquarters in Phoenix.

Division Engineer Promoted

L. E. Seeman, Southwestern Division Engineer for the Corps of Engineers, has been promoted to brigadier general.

With headquarters in Dallas, Texas, Gen. Seeman heads up a military construction program covering more than 75 installations in five states and a civil works program in eight states. He was assigned to the Southwestern Division last September.

Men and Jobs Briefs . . .

• **Associations**—The California Council of Civil Engineers and Land Surveyors names **William A. White** as its first permanent executive secretary, effective Jan. 1.

Rowland M. Garratt, M.I.T. graduate engineer formerly with Gamble Brothers, Inc., Louisville, Ky., joins the laboratory staff of Timber Engineering Co., research affiliate of National Lumber Manufacturers Assn.

• **Careers**—The Oregon Department of Highways names **Maurice N. Juve,** senior resident engineer, assistant division engineer in northwest Oregon . . . **Glenn A. Rick,** city planning director in San Diego, Calif., leaves to open an office as consultant . . . **Solon E. Davis** is appointed highway engineer for Davidson County, Tenn.

• **Retirements**—**Dan W. Ormsbee,** urban engineer, from the Colorado Highway Department, after 22 years of service. He plans to be a civil engineering consultant to utilities and oil companies . . . **Walter J. Long,** senior structural engineer for the California Division of Architecture, with which he's been associated for more than 44 years.

LEGAL

Specifications Are Key To Contractor's Guarantee

A contractor is not necessarily bound by his guarantee that a cellar he constructs will be watertight.

He is bound by the guarantee only if the plans and specifications would produce the desired result.[1]

Quoting from 9 American Jurisprudence, Building and Construction Contracts, Sec. 9, the court said: "A provision in a contract for construction of a cellar according to specifications, the whole to be watertight and guaranteed, binds the contractor only so far as his work is concerned, and does not guarantee the plans will produce a watertight cellar".

(1) Helm v. Sperth, 182 S.W. 2d. 635.

Sub Should Have Checked The Basic Specifications

A subcontractor agreed to manufacture and deliver certain products which were to comply with the requirements of the general contract. The materials as delivered did not comply with the specifications of the general contract and were rejected by the general contractor who bought them from another sub at a cost in excess of that in the first subcontract.

The general contractor brought an action against the first subcontractor and obtained a recovery. The first subcontractor claimed he had failed to read the specifications of the general contract. The court held failure to read specifications did not excuse compliance.[1]

(1) Bowser, Inc. v. Hamilton Glass Co., 207 F. 2d 341

Architect Held to Standard Of Due Care in Supervision

"An architect, when supervision is a part of the duties assumed by him under his contract with the owner, is required to exercise due care in the performance of his supervisory function, and is liable to the owner for negligence on his part."[1]

In this case, the court held that an architect's undertaking of supervisory duties, in the absence of a special agreement, is not an absolute guaranty that satisfactory results will ensue. Where, however, defective work results from negligence on the part of the architect, he is liable to the owner for any damages sustained by him.

(1) Palmer v. Brown, 273 P. 2d 306, District Court of Appeals of California, Aug. 4, 1954.

ONE HAND CONVENIENCE
for fastening to steel or concrete
Ramset Fasteners INC
Ramset
SPEEDS WORK ON LADDERS & SCAFFOLDS
+
other Ramset exclusives:
• FAST CHANGEOVER for light, medium, heavy duty
• JOB-MATCHED SYSTEM— exactly the fastener you need
• PIN-POINT CONTROL for accuracy and speed
• NEARBY SERVICE whenever or wherever you need it
• FASTENING LEADERSHIP keeps Ramset FIRST in the field
For complete information, write
Ramset Fasteners, INC.
RAMSET DIVISION—OLIN MATHIESON CHEMICAL CORPORATION
12107 BEREA ROAD • • • CLEVELAND 11, OHIO

CONSTRUCTION REPORTS

Bids Asked—Low Bidders—Contracts Awarded—First Section—

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 36, N. Y., ELSIE EAVES, Manager
J. A. MAHONEY, M. WETZEL, L. M. WINISKI, M. E. SCIORRA, F. S. DEMBEK, Reports.
J. H. WEBBER, M. R. ROESSLER, E. R. HUBER, Statistics.

NEW ENGLAND

BUILDINGS—BA

▲ Mass., Andover—SCHOOL—BA 9/15—Town High School Bldg. Comn., c/o Supt. Schools, Shawsheen Rd., Junior-Senior High School. $1,750,000. Plans deposit $50. Rich & Tucker Assoc., 45 Newbury St., Boston, Mass., archts. CD 5/4/54.

HEAVY CONSTRUCTION—LB & CA

† Franchi Constr. Co., 815 Washington St., Newtonville, Mass., LB, $210,297, est. $200,000-$250,000, training center, Eldridge St., TAUNTON, MASS. U. S. Eng., 857 Commonwealth Ave., Boston, Mass. Bids Aug. 23. CD 8/10.

† Girodano Constr. Co., 287 Main St., Branford, Conn., LB, $377,000, est. $900,000-$1,000,000. Special AAA Facilities, Orange and West Haven, Site BR-15, ENG-19-016-56-3, CONNECTICUT. U. S. Eng., 857 Commonwealth Ave., Boston, Mass. Bids Aug. 23.

BUILDINGS—LB & CA

J. F. Rand & Sons, 57 Sudbury St., Boston, Mass., CA, $700,000, OFFICE, PORTLAND, ME. Baxter, Inc., c/o Stevens & Saunders, archts., 187 Middle St., Portland, Me.

MIDDLE ATLANTIC

HEAVY CONSTRUCTION—BA

New York—BA 9/15—Henry A. Cohen, dir., Bureau of Contracts & Accounts, The Governor Alfred E. Smith State Office Bldg., Albany, beach protection (exten. of stone groins), Troy and Clayton Aves., East Atlantic Beach, Town of Hempstead. Contr. B.P. 55-34A, Nassau Co., $108,000; beach protection (4 stone groins) at Atlantic Beach, Town of Hempstead, Contr. B.P. 55-51, Part III, Nassau Co., $730,000. Plans deposit $10 each. adv. ENR 9/8/55.

BUILDINGS—BA

▲ N. Y., Mamaroneck—HIGH SCHOOL—BA 10/4—Bd. Educ., Union Free School Dist. No. 1, Business office, Mamaroneck Avenue School, Mamaroneck, I, general constr.; II, heating and ventilating; III, plumbing and gas fitting; IV electrical work; V, site development for alterations in and addn. to Senior High School. Plans deposit $75 for I; $50 each for II, III, IV, $25 for V. CD 12/23.

† N. J., Hackensack—ARMORY, etc.—BA On Or About 10/5—U.S. Eng., 111 E. 16 St., New York 3, N. Y. Armory and motor vehicle storage shed, ENG-30-075-56-44. Plans deposit $25. $250,000-$450,000. CD 8/19.

BUILDINGS—SLC

Pa. Pittsburgh—SCHOOL—Our Lady of Most Blessed Sacrament Church, c/o Marlier & Johnstone, archts., Empire Bldg., soon lets contract 2 story, 58x174 ft. brick, block, steel frame, parochial school. $375,000.

HEAVY CONSTRUCTION—LB & CA

Adson Builders Co., Inc., 116-55 Queens Blvd., Forest Hills, N. Y., LB $308,000, Contr. NYA-690-001 fuel trucks parking facility garage, New York International Airport, IDLEWILD Port of New York Auth. 111 8th Ave., New York 11, N.Y. Bids Aug. 23. CD 8/3.

† Certified Builders, 2662 Kensington-Wheaton Rd., Wheaton, Md., LB, $665,650. Special AAA W-94, site control and launching areas, Gaithersburg, ENG-49-080-56-7-(6), MARYLAND U. S. Eng., First and Douglas Sts. N.W. Wash. 25, D. C. Bids Aug. 23. CD 8/4.

▲ Leo Butler Co., 9217 51 Ave., College Park, Md., CA, $5,030,513. Patapsco Tunnel, Canton Land Section, Contr. PT-112, MARYLAND State Rds. Comn., 108 E. Lexington St., Baltimore 2, Md. Bids Aug. 11, CD 8/15, under LB.

▲ Whiting Turner Contg. Co., National Marine Bank Bldg., Baltimore, Md., LB $3,865,982. pier addns., imprs. McComas St. Terminal, BALTIMORE, MD. Western Maryland Ry. Co., F. L. Etchison, ch. engr., Standard Oil Bldg., Baltimore, Md. Bids Aug. 24. CD 7/28.

BUILDINGS—LB & CA

† R. D. Golden, P.O. Box 1027, Troy, N. Y., CA $379,440, RESERVE TRAINING CENTER, U. S. Naval & Marine Corps Reserve Training Center (IFB NOY 87753), ALBANY, N. Y. P. Wks. Office, Third Naval Dist., 90 Church St., New York 7, N. Y. Bids June 28. CD 6/23.

SOUTH

HEAVY CONSTRUCTION—BA

Va., Richmond—BA 9/20—at office J. W. Huffman, city purch. agt., Mosque Bldg., Laurel and Main Sts., equip. for West End portion of Richmond Sewage Disposal Proj., three motor-driven vertical sewage pumps of 1.5, 3.0 and 6.0 m.g.d. capacities at heads of 180 and 185 ft., one gasoline engine-driven vertical sewage pump of 6.0 m.g.d. capacity at 185 ft. head delivered to site of Gambles Mill Road Pumping Station south of and adjacent to River Rd. at Gambles Mill Rd. near westerly city limits of city; Div. J. Cary Street Road Intercepting Sewer, Part 2, approx. 285 lin. ft. 24 in. and 43 lin. ft. 18 in. concrete pipe sewer, approx. 1,472 lin. ft. 30 in. and approx. 7,862 lin. ft. 36 in. rein.-con. pipe sewer, with manholes, weir and junction chambers and all other structures, in Cary Street Rd. from Hamilton St. northwesterly to Maple Ave., and in Banbury Rd. from Cary St. Rd., southwesterly to Exeter Rd. Plans deposit $25 each. Greeley & Hansen, 220 S. State St., Chicago 4, Ill., engrs.; adv. ENR 9/8. CD 3/31/54.

▲ LOUISIANA—BA 9/27—The Mississippi River Bridge Auth., 422 City Hall Annex, New Orleans, Contract No. 4, superstructure of river crossing for Greater New Orleans Bridge over Mississippi River. Plans deposit $20. Modjeski & Masters, 2400 Canal St., New Orleans, engrs.; adv. ENR 9/8. CD 8/11/53.

BUILDINGS—BA

▲ La., Ruston—SCIENCE—BA 9/27—La. State Bldg. Auth., Baton Rouge, science bldg. at La. Polytechnic Institute, along Adams Blvd. across West Arizona Ave. $1,500,000. Plans deposit $50. Neild-Somdal, 960 Jordan St., Shreveport, archts.

HEAVY CONSTRUCTION—LB & CA

▲ VIRGINIA—Commonwealth of Va., Dpt. Hys., Central Hy. Office Bldg., 1221 E. Broad St., Richmond,

Va.—Adams Constr. Co., P. O. Box 60, Roanoke, Va. LB $204,845 (5 bidders) b. conc. 3.58 mi. Rte. 60, State Proj. 2103-11 Contr. II. Fed. Proj. F-040-1 (1), Allegheny Co.;

Va.—Ames & Webb, Inc., P. O. Box 4055, Norfolk, Va. LB $360,639 (2 bidders) c. conc. 2.54 mi. Rte. 60, State Proj. 2175-06-08-13, Fed. Proj. F-D-AD-10 (1). Princess Anne Co.; LB $369,613 (3 bidders) reinf. and plain concrete pavement, bit. top 1.33 mi. Rte. 164, State Proj. 5375-06-03, Fed. Proj. F-175 (4), Princess Anne Co.;

Va.—Birsch Constr. Corp., Box 6026, Milan Station, Norfolk, Va., LB $81,949 (3 bidders) plain c. conc. pavement, bit. top 0.795 mi. Rte. 17, State Proj. 2064-10. Fed. Proj. F-FG-029-1 (1), Norfolk Co.;

Va.—Robert T. Main Co., P. O. Box 1, Salem, Va., LB $291,189 (8 bidders) soil aggregate, bit. surf. tr. and bridge 3.89 mi. Rte. 360, State Proj. 2349; 05; 2350-01-02 Fed. Proj. F-030-1 (4); F-030-1 (1), King William and King and Queen Counties;

Va.—Ralph E. Mills Co., Inc., P.O. Box 513, Salem, Va. LB $341,182 (4 bidders) aggregate base, bit. surf. tr. 3.96 mi. Rte. 460, State Proj. 1935-12-13-17-18, Fed. Proj. F-128 (4), Giles Co.;

Va.—Moore Bros., P.O. Box 258, Verona, Va., LB $496,437 (5 bidders) b. conc. 1.23 mi. Rte. 250-A, State Proj. 1707-02-04, Fed. Proj. U-158 (2). City of Waynesboro;

Va.—Nelle W. Moyer, P. O. Box 905, Staunton, Va., LB $83,965 (6 bidders) soil aggregate base 6.2 mi. Rte. 635, St. Proj. 1330-16, Fed. Proj S-800 (1), Fauquier Co.;

Va.—Clyde R. Royals, 350 W. Pembroke Ave., Hampton, Va., LB $446,376 (11 bidders) soil aggregate base, bit. surf. tr. and alts. 21.62 mi. Rtes. 608, 612, 611, 610, 646, State Proj. 1330-13; 1376-11-12; 1389-07, Fed. Proj. D-AD-4 (2), Fauquier, Prince William and Stafford Counties;

received no bids Aug. 24, soil aggregate base, bit. surf. tr. 0.64 mi. Rte. 320, St. Proj. 4580-01-02, Roanoke Co.; aggregate, bit. top 1.48 mi. Rte. 220, State Proj. 1833-19-20-25, Fed. Proj. F-302 (16), Franklin Co. Bids Aug. 24. CD 8/10.

† Robertson Constr. Co., 1513 Lyon St., Columbia, S. C. CA $208,045, airmen's service club, jet engine test stands, Myrtle Beach Air Force Base, IFB ENG-38-081-55-94, MYRTLE BEACH, S. C. U. S. Eng., 33 Customhouse, Charleston, S. C. Bids July 22. CD 6/29.

BUILDINGS—LB & CA

▲ Concrete Builders, Inc., 800 East Ave. N. E., Atlanta, Ga., CA $1,000,000. PLANT, 484 Plaster Ave. N. E., ATLANTA, GA. Irvindale Farms, Inc., 1139 Spring St. N.W., Atlanta, Ga. Awarded Aug. 22.

Barksdale & LeBlanc, Box 1567, Baton Rouge, La., LB, $669,877 (2 bidders) Proj. EID-1, STORAGE WAREHOUSE and CARETAKERS QUARTERS, Proj. No. EID-2, BOYS' DORMITORY at Louisiana State School for Deaf, BATON ROUGE, LA. State Bldg. Auth., State Capitol, Baton Rouge, La. Bids Aug. 23. CD 8/5.

Henry Kappen, 680 Clanora Dr., Cincinnati, O., LB $366,860 (6 bidders) RECTORY and SCHOOL, COVINGTON, KY. St. Agnes Chapel, Dixie Hy., Covington, Ky. Bids Aug. 4, awarded Aug. 22. CD 8/1.

MIDDLE WEST

HEAVY CONSTRUCTION—LB & CA

National Eng. & Contg. Co., West 4th and Central Sts., Cleveland 13, O., CA $810,083, est. $700,000-$800,000, Westerly Sewage Plant addns., alterations, CLEVELAND, O. City, Dpt. P. Utilities, City Hall, Cleveland 14, O. Awarded Aug. 24. CD 8/17.

Great Lakes Dredge & Dock Co., Williamson Bldg., Cleveland, O., CA $298,438, Lake intake and crib for water filtration plant to serve northeastern area of Lake Co., at Madison-on-the-Lake, PAINESVILLE, O. Bd. Comrs. Lake Co., Harold A. Fitch, supt. Water Dpt., Court House, Painesville, O., Havens & Emerson, Leader Bldg., Cleveland 14, O., engrs.; R. Hansen Co., 2646 N. Moreland Blvd., Cleveland 20, O., CA $314,490, filtration plant (Painesville, O.).

Elmer Borchardt, Inc., Lucas St., Castalia, O., CA $348,758, pipe lines in Strub Rd. and Columbus Ave. area and Tiffin Ave. water main in Perkins-Margaretta Water Sys. SANDUSKY, O. Grand total $532,370. Bd. Comrs. Erie Co., Court House, Sandusky, O. Jones, Henry & Williams, Security Bldg., Toledo, O., engrs. Awarded Aug. 17, CD 12/24/52;
Pittsburgh-Des Moines Steel Co., Neville Island, Pittsburgh, Pa., CA $51,420, constr. 300,000 gal. tank, (Sandusky, O.);
Mosser Constr. Co., Fremont, O., CA $76,602, constr. tank foundations, valve chamber and pumping station, (Sandusky, O.);
Paul A. Cothrell, 1313 Jefferson St., Toledo, O. CA $55,590, outlying sections pipe lines (Sandusky, O.).

▲ INDIANA—Indiana Toll Road Comn., 309 W. Washington St., Indianapolis,

Union Bldg. & Constr. Co., 631 Main Ave., Passaic, N. J., CA, $5,545,643. Contract C-8, grading, drainage, structures paving approx. 1.9 mi. between Ralston and Buchanan Sts., Gary, Lake Co. Bids Aug. 17. CD 8/22, under LB.

BUILDINGS—LB & CA

Naber Builders, 5547 Cheviot Rd., Cincinnati, O. Own Forces. $600,000. 31 bsmnt., brick HOUSES, Epley and new street off Epley, CINCINNATI, O. Lawrence R. Heyl, 4432 Raceview St., Cincinnati, O., engr. Awarded Aug. 24.

E. J. Benes, Inc., 2860 E. 130 St., Cleveland 20, O., CA $384,656, general constr. 42,000 sq. ft. OPERATING AND HEADQUARTERS BLDG., ELYRIA, O. Elyria Telephone Co., 330 2nd St., Elyria, O. W. H. Kremer, 750 S. High St., Columbus, O., archt. Awarded Aug. 18.

(Continued on page 62)

PROJECTS COVERED

By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $44,000; other public works $73,000; industrial buildings $93,000; other buildings, $344,000. Also Foreign projects of $100,000 and more in size of interest to American contractors.

By Regions & Classes of Construction

(In order of Listings)

BIDS ASKED
LOW BIDDERS
CONTRACTS AWARDED
New England
Middle Atlantic
South
Middle West
West of Mississippi
Far West

PROPOSED WORK
Water Supply
Sewers, Waste Disposal
Bridges
Streets & Roads
Earthwork, Waterways
Public Buildings
Mass Housing
Commercial Buildings
Industrial Buildings
Unclassified

In These Stages

PROPOSED WORK: Before and including appointment of engineers or architects.
BIDS ASKED: BA (new announcements only). For full calendar, see also preceding issues.
LOW BIDDERS: LB On jobs below $500,000 in value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.
CONTRACTS AWARDED: CA Except awards to low bidders previously reported in low bidder stage.
CD dates shown are of Construction Daily issue in which last previous report was published.

Symbols and Abbreviations Include:

† Federal Government
▲ Project of $1,000,000 or over.
ENR Engineering News-Record
CD Construction Daily
For additional reports see Construction Daily.

1,400 crash landings a minute...

Here's a beating your truck will never have to take. This INTERNATIONAL Truck is pounding over the Belgian Block course . . . a torture track so bumpy that, at only 12 miles per hour, it slams wheels up and down 1,400 times a minute—so rugged that drivers are replaced every 20 miles of the 400-mile test.

You save the BIG money in construction hauling with all-truck built INTERNATIONALS. 200 basic models from 4,200 to 90,000 lbs. GVW—conventional and COE, 4-wheel, 6-wheel, four-wheel-drive. Axle and transmission ratios for every need.

to save you the BIG money

We torture INTERNATIONAL Trucks this way to be sure that sheet metal, cabs, springs and all running parts will stand up *longer*. So that our trucks will have utmost roadability, minimum wheel fight, maximum comfort. It's all a part of INTERNATIONAL engineering and design to save you the BIG money—the operating and upkeep money.

INTERNATIONAL engineers are never called upon to adapt passenger car engines or components. They design INTERNATIONALS with extra margins of strength—build them to save you the BIG money in the long run.

Yet with all this all-truck extra value, INTERNATIONALS are competitively priced. Let your INTERNATIONAL Dealer or Branch show you the right INTERNATIONAL for you—*all-truck built to save you the BIG money!*

INTERNATIONAL HARVESTER COMPANY • CHICAGO

All-Truck Built to save you the BIG money!

Top TV Comedy! Ronald Colman and Benita Hume in "The Halls of Ivy," CBS-TV. See your paper for date, time and channel.

INTERNATIONAL® TRUCKS

International Harvester Builds McCORMICK® Farm Equipment and FARMALL® Tractors...Motor Trucks...Industrial Power...Refrigerators and Freezers

HEAVY LOADS

More payload with less downtime! That's the main goal of every tandem trucker . . . whether it's fast inter-city freighting . . . or rugged off-the-road hauling . . . or light-heavy cartage in and around the city.

Almost 40 years of tandem building have taught TDA the best ways to solve every tandem hauling problem. The most complete TDA family of tandems includes models that answer every need in the most economical manner. TDA tandems save payload . . . minimize downtime . . . give longer service . . . and operate with maximum economy under every condition.

ARE PAYLOADS

with TDA® tandems

...and exclusive Timken® Inter-Axle Differential that permits cab-controlled lockout at any speed...

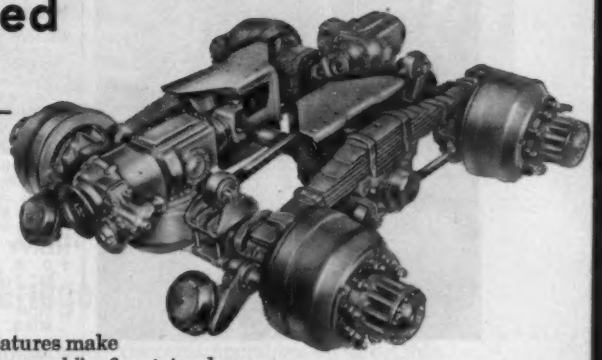

Every heavy trucker has two big problems to lick. *First,* to deliver more payload faster. *Second,* to get the most service out of his equipment . . . with less maintenance, less downtime, and lower operating costs.

Years of TDA leadership have resulted in a tandem line that offers each trucker the most helpful answer to his special problem. In the broad TDA Tandem line, a hauler has a choice of 3 types of final drives and in a full range of capacities . . . standard units that fit his need as though they were tailor-made. But, more important than this is the quality of the TDA product . . . a marked superiority evident in such exclusive TDA features as Straight-Line Drive and Inter-Axle Differential.

Unlike ordinary tandems, in TDA Straight-Line Drive, propeller shafts form an absolutely straight line from the forward rear axle back to the rearmost axle. This permits smoother transmission of power, no noisy *around the corner operation.*

How TDA Inter-Axle Differential cuts truck and tire wear! With cab-controlled lockout! When tandem tires are mis-matched . . . or when tandem trucks are going over rough grades . . . one set of wheels must turn faster than the other. TDA Inter-Axle Differential permits any wheel to do this when necessary. Also, with TDA, the driver can, when necessary, lock out the differential and obtain a straight-through drive in mud or sand.

These features make TDA the *world's finest* tandem drive rear unit for heavy-duty motor trucks! (1) Available in 3 capacities and 3 types of final drives – hypoid-helical double-reduction, optional inter-axle differential. Worm drive, without inter-axle differential. (2) Top-mounted straight-line final drive eliminates propeller shaft angularity. (3) Optional inter-axle differential . . . spur gear design, cab-controlled power-lockout. (4) Torsion flow axle shafts . . . guaranteed for 100,000 miles or three years, whichever occurs first. (5) Hot forged steel axle housing . . . guaranteed for the life of the vehicle. (6) Unit-mounted "P" series power brakes . . . for longer life, greater economy and efficiency. (7) Cradle ride spring suspension and paralleled torque rod system . . . maintain correct alignment and weight distribution regardless of driving and braking conditions. (8) Exclusive two-piece trunnion tube bracket speeds servicing. (9) Removable torque rod and spring guide brackets . . . for positive alignment, easier replacement. (10) Rubber torque rod bushings and rubber spring seat bushings . . . eliminate metal-to-metal contact. Require no lubrication.

TIMKEN Detroit AXLES

TIMKEN DETROIT AXLE DIVISION
ROCKWELL SPRING AND AXLE COMPANY
DETROIT 32, MICHIGAN

The Accepted Standard

TRADE MARK REGISTERED

World's Largest Manufacturers of Axles for Trucks, Buses and Trailers

Plants at: Detroit, Michigan • Oshkosh, Wisconsin • Utica, New York • Ashtabula, Kenton and Newark, Ohio New Castle, Pennsylvania

©1955 RS&A Company

ONLY TDA BRAKES give all these tested advantages!



• Brake shoes made of steel save up to 40 pounds per axle . . . give strong braking action with no distortion • Patented liner shape—thickest where wear is greatest • Liners riveted on—no chance of movement on shoe • Liners circle-ground to cover all efficient braking area of shoe • Rust-proofed anchor pins locked in • First with self-aligning camshaft housings • Cam rollers heat-treated to roll smoother, wear longer • First with all-Nylon camshaft bushings • Compare similar products and prove to yourself that TDA brakes incorporate the finest quality materials, skilled workmanship and advanced design.

SAVE HOURS,

CUT COSTS ON YOUR

PIPING JOBS

PUSH PIPE UNDER STREETS, TRACKS, walks, floors and other obstacles with a GREENLEE Hydraulic Pipe Pusher. One-man-operated, portable, simple to operate. No tearing up of pavement . . . eliminates extensive ditching, tunneling, back-filling, tamping, repaving. Cuts job time to a fraction. GREENLEE Hydraulic Pipe Pusher often pays for itself on first job. Two sizes—model shown above for pushing ¾ to 4" pipe. Larger unit, below, for pipe over 4", concrete sewer pipe and large drainage ducts. Power pump also available for extra ease and speed of operation.

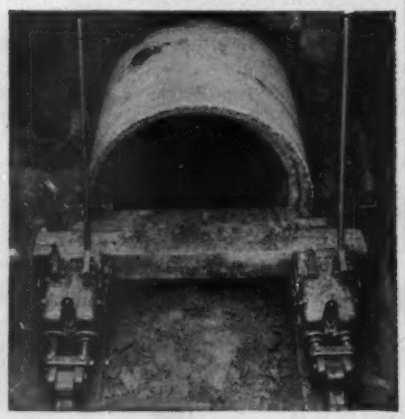

GREENLEE

Write today for descriptive literature. Greenlee Tool Co., 2229 Columbia Avenue, Rockford, Illinois U.S.A.

(Continued from page 58)

E. Mast & Son, 1000 Greenwood St., Zanesville, O. CA general constr. 255-womens DORMITORY, NEW CONCORD, O. Est. **$500,000.** Muskingum College, Robert N. Montgomery, pres. New Concord, O. Bids July 29, Awarded Aug. 22, CD 7/18;
Limbach Co., 1183 Essex St., Columbus, O., heating and plumbing (New Concord, O.);
Lawrence Electric Co., 940 W. Main St. Zanesville, O., CA electric, (New Concord, O.).

Yates Constr. Co., 2039 Grafton Rd., Elyria, O. CA **$650,000,** 75-room MOTEL, Rte. 10 at Ohio Turnpike, incl. swimming pool, adjacent Howard Johnson Restaurant, NORTH OLMSTED, O. Interchange Manor, Inc., Ben Rabb, pres., Chester-12th Bldg., Cleveland 14, O. Awarded Aug. 14.

▲ **George W. Lathrop & Sons, Inc.,** 1510 Montcalm St., Toledo, O., CA Approx. **$2,500,000,** general constr. 7 story bsmnt. HOSPITAL addn., 6 story bsmnt. NURSES' HOME; CENTRAL POWER and HEATING PLANT, new LAUNDRY, 23 and Madison Sts., TOLEDO, O. Mercy Hospital, Sister Mary Blanche, admin., 23 and Madison Sts., Toledo, O. Bids July 1, awarded Aug. 18, CD 7/12 under LB;
Robert W. Carter Co., 125 S. Erie St., Toledo, O., CA **$1,075,000.** plumbing, heating, ventilating (Toledo, O.).

Hagerman Constr. Co., 403 Strauss Bldg., Fort Wayne, Ind., CA, **$800,000,** 6 DORMITORIES, on Campus, FORT WAYNE, IND. Concordia Senior College, Dr. Martin Neeb, pres., St. Joe Rd., Fort Wayne, Ind. Awarded Aug. 19. CD 8/16.

WEST OF MISSISSIPPI

HEAVY CONSTRUCTION—BA

Mo., St. Louis—BA 9/27—City, Frank J. McDevitt, pres. Bd. P. Service, 304 City Hall, 12 Blvd. and Market St., St. Louis, Zone 3, **(A)** garbage grinding plant bldg., 15 and Gratiot Sts. **(B)** equipment, incl. two grinders with 40-ton-per-hr. capacity each, etc. $230,000. Albert Osburg, 301 City Hall, St. Louis, Zone 3, archt. CD 7/26.

BUILDINGS—SLC

Tex., Dallas—NEWSPLANT—**A. H. Belo Corp., & Dallas** Morning News, Young and Houston Sts., soon lets contract remodeling, alterations, addns. existing newsplant bldg. $350,000. George L. Dahl, 2101 N. St. Paul St., archt.-engr. CD 10/25/46.

HEAVY CONSTRUCTION—LB & CA

† **O. B. Ashbach & Sons,** 2975 Hamline Ave. North, St. Paul, Minn., LB, **$206,812** (3 bidders) railroad spur, parking area and rehabilitation of roads, Twin Cities Arsenal, ENG-21-018-56-2, MINNEAPOLIS, MINN. U. S. Eng., 1217 U. S. Post Office & Custom House, St. Paul, Minn. Bids Aug. 24. CD 8/19.

F. Morettini, 1416 Maryland Ave. East, St. Paul, Minn., LB, **$254,664** (6 bidders) Trout Brook extension to Rice St. and sewer in Rice St. from Cottage to Larpenteur Aves., ST. PAUL, MINN. City, 253 City Hall, St. Paul, Minn. Bids Aug. 23. CD 11/9/53.

▲ **IOWA**—State Hy. Comn., Ames,

Iowa—Booth & Olson, Inc., 529 Insurance Exchange Bldg., Sioux City, Iowa, LB, **$175,445,** c. conc. 0.715 U-59 (6) Fayette Co.; LB **$74,153.** c. conc. pavement wid'n. 3.498 mi. FN-37, Buena Vista Co.; LB **$373,939.** c. conc. pavement wid'n. 15.474 mi. P-1073 Buena Vista and Sac Counties; LB **$191,615** c. conc. pavement wid'n. 7.562 mi. FN-721, Carroll Co.; LB **$275,309,** c. conc. pavement wid'n. 12.775 FN-1053, Crawford Co.; LB **$150,997.** c. conc. 6.856 mi. FN-275 Plymouth Co.; LB **$123,018.** c. conc. pavement wid'n. 5.913 mi. FN-342 Plymouth Co.; LB **$260,962** c. conc. pavement wid'n. 10.856 Mi. P-612, Sioux Co.;

Iowa—Hickey Constr. Co., Keokuk, Iowa, LB **$87,064** c. conc. 0.67 mi. FN-416, Lee Co.;

Iowa—Concrete Materials & Constr. Co., 405 Granby Bldg., Cedar Rapids, Iowa, LB **$391,904** b. conc. 14.755 mi. FN-898, Adair and Guthrie Counties; LB **$171,366,** b. conc. 6.585 mi. FN-377 Ringgold Co.; LB **$412,020.** b. conc. 15.629 mi. F-947 (3) Story Co.;

Iowa—Alexander Constr. Co., 4641 Hiawatha Ave., Minneapolis, Minn., LB, **$332,310.** b. conc. 11.996 mi. P-744, Buchanan Co.;

Iowa—Green Limestone Co., Green, Iowa, LB **$212,859** b. conc. 7.198 mi. Special F-775 (6) Cerro Gordo and Franklin Counties;

Iowa—Mauer Constr. Co., Sac City, Iowa, LB, **$191,272** b. conc. 7.45 mi. Special FN-951, Clay Co.; LB **$336,283.** b. conc. 11.023 mi. Special FN-785, Greene and Webster Counties; LB **$165,800** b. conc. 6.659 mi. Special F-992 (2), Lyon Co.;

Iowa—Kaser Constr. Co., 3111 Ingersoll St., Des Moines, Iowa, LB **$155,936** b. conc. 5.724 mi. Special F-941 (6) Davis Co.; LB **$100,941** b. conc. 3.407 mi. Special FN-812 (1) Taylor Co.; LB **$104,136** b. conc. 3.519 mi. Special FN-812-A, Taylor Co.; LB **$91,565** b. conc. 3.049 mi. Special p-880, Taylor Co.; LB **$194,817,** b. conc. 4.895 mi. Special F-71 (10) Washington Co.; LB **$211,823.** b. conc. 5.168 mi. Special F-167 (7), Washington Co.;

Iowa—W. Hodgman & Sons, Fairmont, Minn., LB **$322,584.** b. conc. 12.04 mi. Special FN-168, Fayette Co.;

Iowa—Fort Dodge Limestone Co., Fort Dodge, Iowa, LB **$145,889.** b. conc. 5.752 mi. Special FN-546, Keokuk Co.;

Iowa—Norris Constr Co., Ottumwa, Iowa, LB, **$140,771** b. conc. 6.483 mi. Special FN-373-C, Lee Co.; LB **$145,602.** b. conc. 6.593 mi. Special FN-373-E, Lee Co.;

Iowa—Hargrave Constr. Co., 2424 Beaver St. S. E., Cedar Rapids, Iowa, LB **$461,606.** b. conc. 8.27 mi. Special F-1014 (4), Linn Co.;

Iowa—Hallett Constr. Co., Crosby, Minn., LB, **$297,213** b. conc. 6.584 mi. Special F-176 (3) Tama Co.; LB **$116,940.** b. conc. pavement wid'n. 6.173 mi. wid'n. FN-318, Hamilton Co.; LB **$233,087** b. conc. 13.179 wid'n. FN-139 (1), Hancock Co.; LB **$247,476.** c. conc. pavement wid'n. 12.037 mi. wid'n. FN-139 (2), Hancock and Winnebago Counties; LB **$212,334** c. conc. pavement wid'n. 12.031 mi. wid'n. FN-267 (1), Wright Co.; LB **$212,334.** c. conc. pavement wid'n. 12.862 mi. Wid'n. FN-267 (2), Wright Co.; LB **$129,973,** c conc. pavement wid'n. 6.387 mi. wid'n. FN-30, Winnebago Co.;

Iowa—H. H. Mass, Algonquin, Ill., LB **$267,870** c. conc. pavement wid'n. 14.933. Wid'n. FN-5, Buchanan Co.; LB **$270,403,** c. conc. pavement wid'n. 14.533 mi. Wid'n. P-1072, Buchanan and Delaware Counties;

Iowa—Ronald Kenyon Constr. Co., 415 Maple St., West Des Moines, Iowa, LB **$326,579.** c. conc. pavement wid'n. 16.349 mi. Wid'n. P-77, Jasper Co.; LB **$300,990.** c. conc. pavement wid'n. 16.752 mi. Wid'n. P-510, Keokuk and Mahaska Counties; LB **$251,262** c. conc. pavement wid'n. 10.369 mi. Wid'n. FN-70 Mahaska Co.; LB **$213,176.** c. conc. pavement wid'n. 11.168 mi. Wid'n. FN-260, Marion Co.;

Iowa—McDougal-Hartman Co., 3101 N. Adams St., Peoria, Ill., LB **$201,900.** c. conc. pavement wid'n. 9.306 mi. Wid'n. P-306, Washington Co.;

Iowa—Jensen & Krage, 2220 Hawkeye Dr., Sioux City, Iowa, LB, **$105,229** c. conc. pavement wid'n. 7.28 mi. Wid'n. FN-404, Woodbury Co.;

Iowa—R. B. Burch, Inc., 249 33 St. Dr. S. E. Cedar Rapids, Iowa, LB **$88,965,** grading 1.324 mi. F-899 (1), Iowa Co. Bids Aug. 23. CD 8/11.

▲† **Hyde Constr. Co., Inc.,** P. O. Box 687, Jackson, Miss., CA **$1,350,231.** rehabilitation existing roads and utilities, curbs, gutters, surfacing and drainage, Little Rock Air Force Base, ENG-03-050-55-15. JACKSONVILLE, ARK. U. S. Eng., P. O. Box 867, Little Rock, Ark. Bids June 27. CD 5/27.

† **MONTANA**—Bureau P. Rds., Dpt. Commerce, Post Office Bldg., Missoula,

Long Constr. Co., Lockwood Flats, Billings, Mont., LB **$453,427** (5 bidders) grading 20.792 mi., surf., rock production 22.404 mi. Ashland-Broadus Hy. Proj. 53-A2, B2, C2, D2, E1. Powder River and Rosebud Counties. Bids Aug. 22. CD 8/12.

† **Leigland Co.,** South of Great Falls, Mont. LB **$305,656,** est. $244,635 (two biddres), exchange sales store, Great Falls Air Force Base, ENG-45-165-56-3, GREAT FALLS, MONT. U. S. Eng., City-County Airport, Walla Walla, Wash. Bids Aug. 18. CD 7/14.

▲† **WYOMING**—Bureau P. Rds., Dpt. Commerce, Bldg. 40, Denver Federal Center, Denver, Colo.

Strong Constr. Co., Springfield, Utah, LB **$1,377,686,** est. $1,529,008. grading, base, surf. 20.966 mi. Proj. 1-AB and 1-AC, East Side Hy., Grand Teton National Park, Teton Co. Bids Aug. 25. CD 8/9.

▲ **NEW MEXICO**—State Hy. Dpt., Capitol Bldg., Santa Fe,

N. M.—Brown Contg. Co., 3525 4th St. N. W., Albuquerque, N. M., CA **$300,264,** controlled graduation sub-base, hot plant bit. surf., 3 concrete steel overpass structures each 3 spans 1.625 mi. spur on State Rd. No. 422, connecting State Rd. 422 to U. S. 85 north of Albuquerque, F. A. Proj. F FG-001-4 (9), Bernalillo Co.; LB **$624,446,** plant mix surf. 15.74 mi. U. S. 66 from Albuquerque westerly toward Correo. F. A. Proj. F. FI-003-3 (4), Bernalillo Co.;

N. M.—Jack Adams, Santa Fe, N. M., CA **$127,000,** surf. tr. 9.14 mi. S. R. 256 from jct. with S.R. 31 northeast of Loving easterly toward JA1, F.A. Proj. S 1271 (4), Eddy Co.;

N. M.—Floyd Haake, Agua Fria, Santa Fe, N. M., CA **$153,493,** grading 4.42 mi., four 25 ft. span pre-cast concrete bridge State Rd. 53 between Zuni and Ramah, F.A. Proj. S 1301 (3), McKinley Co.;

N. M.—G. I. Martin, 400 California St. S. E., Albuquerque, N. M., CA **$95,515,** grading, drainage, sub-base, surf. tr. 7.715 mi. State Rd. 309 from Frost School to U. S. 66, F. A. Proj. S 1413 (1), Quay Co. Grand total $1,300,718. Bids July 22. CD 7/15.

BUILDINGS—LB & CA

Edward Cassilly, Jr., Inc., 534 S. Elm St., Webster Groves 19, Mo., Owner Builds, **$344,707.** 36 brick, concrete RESIDENCES and GARAGE, General Sherman Dr. near Laclede Station Rd. AFFTON (St. Louis 23, P. O.) MO.

C. Rallo Contg. Co., Inc., 5000 Kemper Ave., St. Louis 19, Mo., CA, Total est. **$350,000** general contract 1 story, part ground, 63x196 ft. and 63x102 ft., brick, block, tile, concrete, steel parochial SCHOOL, Stansberry in Woodson Terrace Area, OVERLAND (St. Louis 14, P. O.) MO. St. William's Catholic Parish, Rev. Walter Boul, pastor, c/o Archdiocesan Bldg. Comn., Rev James Hartness, exec. secy., 3810 Lindell Blvd., St. Louis 8, Mo. Bids Aug. 18. CD 8/5.

The White Development Corp., 1695 Brentwood Blvd., Brentwood 17, Mo., Owner Builds, **$350,000.** two addni. 1 story, brick, steel, concrete 90,000 sq. ft. Warson Village SHOPPING CENTER, 9900 Manchester Rd. between Berry and Sappington Rds., ROCK HILL (St. Louis 24, P. O.) MO. Bernoudy-Mutrux, 7 Forsyth Walk, Clayton 5, Mo., archt.

Metallic Building Co., Athens, Tex., CA **$95,125,** one brick PLANT bldg. to house kiln and dryer. ATHENS, TEX. Athens Brick Co., Inc., Athens, Tex. CD 5/31; **Miller Brothers,** Salisburg, N. C., CA **$225,000,** brick kiln (Athens, Tex.).

Anderson Constr. Co., Beaumont, Tex. Owner Builds. **$388,500,** 28 DWELLINGS; **$360,000,** 18 DWELLINGS, BEAUMONT, TEX. CD 5/24.

The Lusk Corp., Box 6204, Tucson, Ariz. Owner Builds. **$366,150,** (E) 25 DWELLINGS, EL PASO, TEX. CD 4/14.

L. L. Bair, Garland, Tex. Force Account, $389,900, 37 DWELLINGS, GARLAND, TEX. CD 4/19.

Briargrove Land Co., c/o R. L. Phillips, Almeda-Genoa Rds., Houston, Tex. Own Forces. $420,125, Unit 4, 20 DWELLINGS, HOUSTON, TEX. CD 5/3.

Robert P. Puig, The Builder, Villanova St., Houston, Tex., CA $369,125, Group 5, 12 all masonry DWELLINGS, HOUSTON, TEX. Memorial Forest, c/o Robert P. Puig & H. W. Edmunds, Villanova St., Houston, Tex. CD 4/27.

Lester L. Tatum & Assocs., 4685 Westheimer St., Houston, Tex. Owner Builds. $400,000. 15 all masonry DWELLINGS, HOUSTON, TEX. CD 5/5.

FAR WEST

HEAVY CONSTRUCTION—BA

▲ **Ore., Portland**—BA 9/29—Comrs. Multnomah Co., Court House, 1st Section, four main piers Willamette River Bridge, $2,250,000. Moffat, Nichol & Taylor, Concord Bldg., Portland, and Sverdrup & Parcel, Inc., 220 Bush St., San Francisco, Calif., engrs. CD 8/18/54.

HEAVY CONSTRUCTION—LB & CA

† **Allison Honer Co.,** 312 N. Main St., Santa Ana, Calif., CA, $149,750. radio communications facilities, Marine Corp. Air Station, NOY 86704, EL TORO, CALIF. Dpt. Navy, Eleventh Naval Dist., San Diego, Calif. CD 10/22.

CANADA

HEAVY CONSTRUCTION—BA

Ont., Cooksville—BA 9/12—Toronto Twp., Twp. Offices, 150 ft. long, two equal spans rein.-con. steel girder bridge 30 ft. wide roadway, on Base Line Rd. at Credit River, $250,000. Plans deposit $25. W. A. Maxwell, c/o owner, twp. engr. CD 5/11.

HEAVY CONSTRUCTION—LB & CA

Rayner Constr. Ltd., 29 Commercial Rd., Toronto, Ont. LB $276,906, pavement wid'n., Woodbine Ave. TORONTO, ONT. Municipality of Metropolitan Toronto, 67 Adelaide St. E., Toronto, Ont. CD 3/23;
Miller Paving Ltd., 56 Blake St., Toronto, Ont., LB $271,290. pavement wid'n. Eglinton Ave. E., Contract 30-55 (Toronto, Ont.);
Dufferin Constr. Co., 2700 Dufferin St., Toronto, Ont. LB $85,548. b. conc. pavement part of the way with conc. base, curbs and gutters Keating St. Contracts 32-55 and 33-55, (Toronto, Ont.);
Standard Paving & Materials Ltd., Harbor Commission Bldg., Toronto, Ont. LB $194,658 pavement wid'n. The Queensway, Contract 31-55, (Toronto, Ont.).

BUILDINGS—LB & CA

Commonwealth Constr. Co. Ltd., 300 Royal Bank Bldg., Winnipeg, Man., CA $500,000. 1 story, 181x261 ft. WAREHOUSE, Northern Ave., FORT WILLIAM, ONT. Western Grocers Ltd., 289 King St., Winnipeg, Man.

Dr. J. Kuhl, 17 Fairleigh Cres., Toronto, Ont., Owner Builds, $900,000, 5 story 111-suite masonry, steel, concrete APARTMENT, Dowling Ave. TORONTO, ONT. Alex Tobias, 24 Cecil St., Toronto, Ont., engr. CD 5/9.

▲ **Adrien Legace,** 10 Legace St., Strathmore, Que., Owner Builds, $2,500,000, 100 bungalow HOUSING program, BEACONSFIELD, QUE.

Paul Rolland Constr. Ltd., 6545 Monkland Ave., Montreal, Que., Owner Builds. $840,000. 60-unit HOUSING program, MONTREAL, QUE. Central Mortgage & Housing Corp., 940 Cote de Liesse Rd., Montreal, Que., archt.

▲ **Damien Boileau Ltd.,** 705 Beaumont Ave., Montreal, Que., CA Est. $1,800,000. 4, 5 and 7 story bsmnt., 200x280 ft., rein.-con., brick, HOME for religious order, ROSEMERE, QUE. Les Freres du Sacre Coeur, 12085 Notre Dame St., S., Pointe aux Trembles, Que. Andre Marien, 4510 Cartier St., Montreal, Que., archt. Brouillet & Carmel, 3600 Barclay Ave., Montreal, Que., engrs.

▲ **Quebec Constr. Ltd.,** 11 Legace St., Strathmore, Que., Owner Builds, $1,500,000. 100-bungalow HOUSING program, ST. MARTIN, QUE.

PROPOSED PROJECTS

WATER SUPPLY

▲ **La., Lake Providence**—Town, Town Hall, municipal electric and water system addns., imprvs. $2,000,000. Barnard & Burk, 1023 Nicholson Dr., Baton Rouge, consult. engrs. CD 10/16/52.

SEWERS, WASTE DISPOSAL

▲ **Ky., Louisville**—City, Metropolitan Sewer Dist., 414 W. Jefferson St., plans by Joseph & Joseph, Speed Bldg., incinerator, $3,000,000. E. R. Ronald & Assocs., 554 S. 3 St., consult. engrs. Bids in September. CD 11/11.

▲ **Tex., Tyler**—City voted bonds Aug. 20, sewage disposal unit, $500,000; storm sewers, $750,000; sanitary sewer collection lines, $2,000,000; sewage lift stations, $200,000; sanitary sewer rehabilitation work, $401,574. Wisenbaker, Fix & Assocs., Tyler, consult. engrs. CD 7/15.

▲ **Ont., Toronto**—Municipality of Metropolitan Toronto, 67 Adelaide St. E., Don River trunk sanitary sewer from Todmorden to 2,000 ft. north of Sheppard Ave. $2,526,000. Proctor, Redfern & Laughlin, 11 Jordan St., consult. engrs. CD 8/10/44.

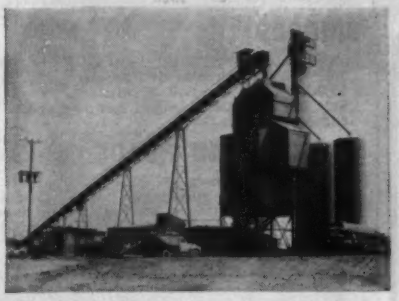

1. Central plant produces 3 types of mixes

2. Dumpcretes haul 4 yds. to paving site

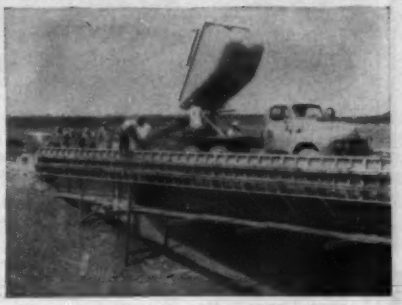

3. Same truck with different mix for bridge

4. Access road widening gets this 4 yd. load

Dumpcretes haul concrete for paving, widening, bridges on Ohio Turnpike

D. W. Winkelman's simplified concrete operation on the Ohio Turnpike has created a stir of interest among paving contractors. With central-mixing and Dumpcretes he produced and hauled concrete for paving a 10-mile section . . . for widening access roads . . . and for bridges, retaining walls and other structures. This method allowed pours on many of these jobs to be made at the same time with concrete produced by a single plant . . . and eliminated pavers, water trucks and the men to run them. The same method cuts costs on small jobs, too. Write for job reports.

MAXON DUMPCRETE

Fastest from plant to pour

Send Me ☐ Concrete for Paving and Structures on Ohio Turnpike ☐ Job Reports on Low Cost Non-Agitating Hauling of Concrete

Name _____

Firm _____

Street _____

City _____

Manufacturing Division, Maxon Construction Co., Inc., 712 Talbott Building, Dayton 2, Ohio

TEST BORINGS for
- COAL
- MINERALS
- DAMS & BRIDGES
- BUILDINGS

We look into the earth.

PENNSYLVANIA Drilling CO.

DRILLING CONTRACTORS AND MFRS.
PITTSBURGH 20, PA.

DRILLING CONTRACTORS

Diamond and Shot Core Borings
Dry Sample Borings
Grout Holes and Pressure Grouting
Foundation Testing for Bridges, Dams and other Heavy Structures

Manufacturers, also of Diamond Core Drilling Machines and complete accessory equipment, including all types of Diamond Drilling Bits. Ask for Bulletin 320.

SPRAGUE & HENWOOD, Inc.
Dept. E, Scranton 2, Penna.

Goldblatt

free tool catalog

for the trowel trades

1,056 Genuine tools

...trowel trades 1955 catalog

Lists 1,056 different tools used by bricklayers, stone masons, plasterers, tilesetters, lathers, dry wall applicators, cement finishers, and contractors. Fully illustrated. 1955 edition. Detailed descriptions of many tools not available anywhere else. Almost everyone in the building industry needs this book. Write for your Free Copy today.

GOLDBLATT TOOL CO., Dept. X-9
1928 Walnut, Kansas City 8, Mo.

Sound Powered TELEPHONES work in any emergency

because they NEED NO CURRENT

If everything else fails, these phones will still provide trouble-free performance over a distance of many miles. Speaking is activated solely by the sound energy of the voice while ringing is accomplished by a hand-driven magneto. For permanent installation on industrial projects or for temporary use on construction work where they can be moved as the job progresses.

INDOOR AND OUTDOOR MODELS

In selective or common ringing and semi-selective or common talking. Cost of upkeep is negligible.

Write for illustrated catalog

HOSE-McCANN TELEPHONE CO., INC.
761 THIRD AVENUE
BROOKLYN 32, N. Y.

▲ **Que., Montreal**—City, City Hall, collector sewer in northwestern part of city, $10,000,000. Lucien L'Allier, c/o owner, dir. P. Wks. CD 10/25/44.

BRIDGES

▲ **O., Cleveland**—City, Dpt. P. Service, Louis L. Drasler, dir., City Hall, Zone 14, Jefferson Ave. Bridge, $3,000,000. Trygve Hoff & Assocs., 1922 E. 107 St., Zone 6, consult. engrs. John Heffelfinger, city bridge engr. CD 6/24.

STREETS AND ROADS

▲ **Mo., St. Louis County**—St. Louis County, c/o County Council, Luman F. Matthews, co. superv., Court House, Clayton, Zone 5, section innerbelt highway 5.04 mi. from Page Ave. to Eager Rd. in Richmond Heights, $8,100,000; widening, imprv. 5.15 mi. Florissant Rd., Cool Valley Village to Hy. 140, $200,000; 2.48 mi. Sappington Rd., Gravois to Big Bend Blvd., $133,000; new feeder road, Eager Rd. to Brentwood Blvd. along old Kirkwood-Fergoson St. car right-of-way, $107,000; imprv. 1.05 mi. Lilac Ave. north to Bellefontaine Church Rd., $95,700; 0.48 mi. Kenerly Ave., Hodiamont Ave. to Myrtle Ave., $88,500; 5.55 mi. Kiefer Rd., Manchester Rd. to Vance Rd., $87,400; imprv. 3.3 mi. Laclede Station Rd. Big Bend and Wilshusen Ave. to Gravois Rd., $304,400; imprv. 14.7 mi. Clayton Rd., Conway Rd. to Eatherton Rd., $349,700; imprv. West Florissant Rd., Jennings Station Rd. to Chambers Rd., incl. widening 2.67 mi., $217,000; imprv. Midland Blvd. 5.9 mi. from Canton Ave., University City to Lindbergh Blvd., $831,600; wid'n., imprv. Union Rd., St. Louis city limits to U.S. Hy. 61-67, $653,250; imprv. Woodson and McKnight Rds., St. Charles Rd. to Midland Blvd. and Litzsinger Rd. to Manchester Rd., $480,800; constr., development city-county limits belt road involving portions Jennings Station Rd., Kienlen and Ogden Aves., 7 mi. from Bellefontaine Rd. to Skinker and Olive Blvds., $1,384,000; wid'n. Chambers, Airport and Brown Rds., St. Louis city limits to proposed outerbelt hy. west of Lindberg Blvd., 11.1 mi., $1,008,400. Fred H. Kiburz, Court House, Clayton 5, Mo., county hy. engr.

▲ **Tex., Tyler**—City, voted bonds Aug. 20, street imprvs., paving, $1,400,000. Wisenbaker, Fix & Assocs., Tyler, consult. engrs. CD 7/15.

EARTHWORK, WATERWAYS

▲ **Washington**—Puget Sound Power & Light Co., Stuart Bldg., Seattle, Zone 1, hydro dam across Upper Baker River, near Concrete. $35,000,000. Stone & Webster Eng. Corp., 49 Federal St., Boston, Mass., consult. engrs. CD 12/29/53.

▲ **Wisconsin**—Wisconsin Valley Imprvt. Co., 327 3 St., Wausau, dam and reservoir 2.75 mi, Little Eau Plein River, Marathon, Portage and Wood Counties, $6,000,000. Pioneer Service & Eng. Co., 231 N. La Salle St., Chicago, Ill., consult. engr. CD 6/11/54.

AIRPORTS

▲† **Calif., Muroc**—LABORATORY, etc.—U. S. Eng., 751 S. Figueroa St., Los Angeles, computation laboratory, $190,000, Austin, Field & Fry, 2311 W. 3 St., Los Angeles, consult. engrs.; hangar and utilities, $2,500,000; medium thrust sewer and water sys., $250,000; access road $75,000; medium thrust electric lines and sub-station $150,000; 34.5 and 12. kv electric sys. addns., $300,000; aircraft research laboratory, $75,000; road to test station 1A, $200,000; combination research laboratory and utilities, $500,000, Edwards Air Force Base. CD 9/16/54.

▲ **Calif., San Francisco**—FACILITIES—United Airlines, San Francisco International Airport, San Francisco, plans by Skidmore, Owings & Merrill, 1 Montgomery St., facilities addns. incl. hangars, warehouse, maintenance facilities, at San Francisco International Airport, 40-acre site adjacent to airport, $6,000,000.

▲ **Colo., Denver**—HANGAR, etc.—Continental Air Lines, Stapleton Field, Denver, plans by Kahn & Jacobs, engrs.-archts., 2 Park Ave., New York, N. Y., hangar and office buildings. $7,000,000.

▲† **La., Lake Charles**—AIR BASE FACILITIES—U. S. Eng., Box 1229, Galveston, Tex., plans by Brown & Butler, and John H. Farrens, Jr., archts.-consult. engrs., Box 605, Baton Rouge, facilities, incl. sewage treatment and disposal, over $5,000,000; plans by Dunn & Quinn, archts.-consult. engrs., 1735 Ryan St., technical laboratory base, target intelligence training, club service, club NCO, etc., over $5,000,000; plans by Ricciuti & Assocs., archts.-consult. engrs., 302 Queen and Crescent Bldg., New Orleans, operations, base shop, operational training, organizational maintenance, dining hall, officers addn., commissary food sales, headquarters wing addn., dining hall, AM operational squadron bldg., etc., over $5,000,000, Lake Charles Air Force Base.

▲† **Tex., Abilene**—AIR BASE—U. S. Eng., 100 W. Vickery Blvd., Fort Worth, paving, fuel dispensing, training, appropriated troop housing, utilities, medical, storage, personnel, administration and community facilities, $4,214,000.

▲† **Tex., Ellington Air Force Base**—DORMITORIES, etc.—U. S. Eng., Box 1229, Galveston, plans by Stone & Pitts, archts.-consult. engrs., 1872 Calder Ave., Beaumont, dormitories, dining hall, electrical distr. sys., etc. Over $5,000,000.

▲† **Tex., Kelly Air Force Base**—DISPENSARY, etc.—U. S. Eng., Box 1229, Galveston, plans by Fehr & Granger, consult. engr.-archt., 502 E. 5 St., Austin, Zone 1, dispensary, out-patient, headquarters squadron bldg., over $5,000,000; plans by David C. Baer, consult. engr.-archt., 1200 Bissonnett St., Houston, maintenance shops, club, officer, building, etc., Air Force Facilities, over $5,000,000. CD 6/27/51.

▲† **Tex., Lackland Air Force Base**—AIR FORCE FACILITIES—U. S. Eng., P. O. Box 1229, Galveston, plans by Grayson Gill, archt.-consult. engr., 1913 San Jacinto St., Dallas, Air Force Facilities, 5 classrooms bldgs., over 81,650 sq. ft. total, all utilities, storm drains, etc., $5,000,000. CD 9/14/51.

▲† **Alaska**—LIQUID FUEL PIPE LINE, etc.—U. S. Eng., Anchorage, liquid fuel pipe line, $900,000; nurses' quarters $800,000; dental clinics, $300,000; officers dining hall, $700,000; airmen's dining hall, $600,000; communications and electronics shop, $400,000; base rocket storage assembly, $300,000; high tensity lighting for airfield runway, $200,000; potable water supply mains, $100,000; chapel, $75,000, lighting, $50,000; primary runway and strengthen existing runways and taxiways, $4,500,000; blast and heavy warmup pad, $4,000,000; pipe line relocation, airfield and taxiway lighting, $3,500,000; nosewing hangars, $3,000,000; airmen's dormitories, $3,250,000; fuel hydrant, $1,750,000; underground storage tanks, $1,500,000; hardstands and dispersed parking, $1,000,000, Elmendorf Air Force Base. Bids to be called in February.

LATIN AMERICA

▲ **Mexico, Ciudad Acuna**—Ramon D. Bosques, domicilio conocido, Ciudad Acuna, plans office and radio station XERF. $4,000,000.

PUBLIC BUILDINGS

▲ **Calif., Grossmont**—SCHOOLS—Grossmont Union High School District, Grossmont, $2,250,000 bond election Oct. 14, high school in La Mesa-Spring Valley Area Terluf Brydergaard, 423 Date St., San Diego, archt.

▲ **Calif., Los Angeles**—HALL OF ADMINISTRATION—Los Angeles Co., Hall of Records, plans by J. E. Stanton, Paul R. Williams, Adrian Wilson & Austin, Field & Fry, 627 S. Carondelet St., Los Angeles, hall of administration in Civic Center, $16,318,000.

▲ **Calif., Los Angeles**—SCHOOLS—Los Angeles Bd. Educ., 1425 S. San Pedro St., plans by Heitschmidt & Thompson, 2010 Wilshire Blvd., Northwest Valley High School Haskell and Nordhoff Sts., $4,200,000; plans by Chalx & Johnson, 2504 W. 7 St., Bel Air No. 2 School, Roscomare Rd. and Mulholland Dr., $375,000. CD 4/8.

▲ **Conn., New Haven**—SCHOOLS—City, William J. Clancy, pres. Bd. Educ., plans by Schilling & Goldbecker, 18 Trumbull St., 2 high schools, $5,500,000.

▲ **Mich., Oak Park**—SCHOOL—City, Louise Shaw, clk., voted $4,500,000 bonds school construction. O'Dell, Hewlett & Luckenbach, 950 N. Hunter Blvd., Birmingham, archts. CD 8/11.

▲ **Mo., St. Louis**—WORKHOUSE—City, Frank J. McDevitt, pres. Bd. P. Service, 304 City Hall, 12 and Market Sts., Zone 3, plans by Albert Osburg, 301 City Hall, city workhouse, $3,000,000, Walter Crecelius, 301 City Hall, Zone 3, engr. Bids early in 1956. CD 6/7.

▲ **Pa., Erie**—CITY HALL—City, city hall, $4,000,000. CD 4/1/46.

▲ **Tenn., Memphis**—POWER PLANT—City, City Hall, power plant, $100,000,000. Burns & Roe, 233 Broadway, New York, N. Y., consult. engrs.

COMMERCIAL BUILDINGS

▲ **Calif., Inyokern**—HOUSING—Dpt. Navy, Eleventh Naval Dist., San Diego, plans by Hugh Gibbs, 441 E. First St., Long Beach, construct, manage and finance 300-wood frame, stucco dwellings at China Lake, Naval Ordnance Test Station, $2,500,000.

▲ **Calif., Los Angeles**—DWELLINGS—Pola, Inc., 9615 Van Nuys Blvd., Van Nuys, 413 frame stucco dwellings, Lassen, Plummer, Hayvenhurst Sts., Van Nuys District $4,265,000.

▲ **Calif., San Jose**—HOTEL—Sage Hotel, c/o Steindorf & Henderson, attys., Bank of America Bldg., plans by Bruce E. Heiser, 251 Post St., San Francisco, rein.-con., steel hotel $2,000,000.

▲ **Ill., Champaign**—SHOPPING CENTER—Mark Mercer, c/o Motel Mercer, Route 3, Urbana, shopping center, 40-acre site on West Springfield Ave. $2,000,000. Project to start in March, 1956.

▲ **Minn., Minneapolis**—BANK—First National Bank of Minneapolis, G. Murray, pres. First National-Soo Bldg., bank, 2 Ave. South and 6 St. $2,000,000.

▲ **O., Cincinnati**—SHOPPING CENTER—Shopping Centers, Inc., c/o P. Palazzolo, 2045 Gilbert St., 200,000 to 250,000 sq. ft. shopping center Paxton Rd. near Kilbourne Ave. $3,500,000 Frankenberger, Junker & Lensky, 2910 Woburn St., consult. engrs.

▲ **O., Dayton**—SHOPPING CENTER—Linden Shopping Center, c/o Sam Levin, 5327 W. Third St., will not construct 30-store shopping center, Xenia Pike between Woodman Dr. and Spinning Rd. $3,000,000. Project abandoned, zoning refused. CD 8/11.

▲ **Tex., Dallas**—HOTEL, etc.—A. L. Pate, Jr., Lang Floral & Nursery Co. & Assocs., 1214 Main St., plans by Jack Corgan, Melba Bldg., 18 story hotel, $16,000,000; auto parking garage, $400,000, at Haskell, McKinney and Central Expressway.

▲ **Tex., Houston**—OFFICE, etc.—Ada Oil Co., c/o K. S. Adams, Jr., 609 Hughes St., plans by D. Barthelme & Hamilton Brown, 2017 W. Gray St., 13 to 20 story office and garage. $3,000,000-$3,500,000. Walter P. Moore, 2 Pinedale St., consult. engr. CD 3/9.

▲ **Utah, Provo**—RESIDENCE HALLS—L. D. S. Church, 47 East. South Temple St., Salt Lake City, plans by Arnold H. Ehlers, 125 N. Main St., Salt Lake City, and Lowell E. Parish, 325 Dooly Bldg., Salt Lake City, men's residence halls and central bldg., Brigham Young University, $2,400,000. CD 6/8/53.

▲ **Wash., Tacoma**—OFFICE—Weyerhaeuser Timber Co., Tacoma Bldg., 12 story Over $1,000,000. Work expected to begin this year.

▲ **Que., Chateauguay**—HOUSING—Owner, c/o H. Joseph & Co. Inc., agents, 4492 St. Catherine St. W., Montreal, plans by Central Mortgage & Housing Corp., 940 Cote de Liesse Rd., Town of Mount Royal, Montreal Zone 16, 3,000 unit housing program, over $40,000,000.

INDUSTRIAL BUILDINGS

▲ **Ala., Mobile**—PLANT—Scott Paper Co., Market and Marcus Sts., Chester, Pa., plant, $200,000,000.

▲ **Calif., Los Angeles**—PLANT—Ford Motor Co., Mercury Div., 5801 South Eastern St., plans by Smith, Hinchman & Grylls, Inc., archt.-engr., 800 Marquette Bldg., Detroit, Mich., 1,300,000 sq. ft. automobile plant, 200-acre site, 4 mi. east of present plant. $1,000,000.

▲ **Conn., Willimantic**—PLANT—Jones & Laughlin Steel Corp., Gateway Center, Pittsburgh, Pa. cold finished steel bar plant.

▲ **Iowa, Cedar Rapids**—PLANT—Allis-Chalmers Co., P.O. Box 512, Milwaukee, Wis., plans by H. R. Green Co., engr.-archt., 417 1 Ave. S.E., Cedar Rapids, branch plant incl. 3 new bldgs. and present office bldg. addn. $1,800,000. CD 8/11.

▲ **Mo., Cape Girardeau**—MILL EXPANSION—Marquette Cement Mfg. Co., W. A. Wecker, pres., 20 N. Wacker Dr., Chicago, Ill., cement mill expansion, incl. one-kiln wet-process unit, complete with cement storage and bulk loading facilities at dock on Mississippi River, $6,500,000. CD 11/27/50.

▲ **Mo., Kansas City**—WAREHOUSE—Avon Products, Inc., 1535 Walnut St., plans by Charles E. Keyser, 609 Minnesota St., warehouse, $1,500,000.

▲ **N. J., Fairlawn**—BAKERY—National Biscuit Co., 499 W. 14 St., New York, N. Y., biscuit and cracker bakery. Over $2,000,000.

▲ **N. Y., Dunkirk**—PLANT and OFFICE—Allegheny Ludlum Steel Corp., Oliver Bldg., Pittsburgh, Pa., plant addn. and new office bldg., $1,000,000.

▲ **Okla., Ponca City**—REFINERY—Cities Service Oil Co., 1707 E. 6 St. Tulsa, refinery enlargement. $5,000,000.

▲ **Pa., Pittsburgh**—LABORATORY—H. J. Heinz Co., 1062 Progress St., plans by Skidmore, Owings & Merrill, 575 Madison Ave., New York, N. Y., laboratory, $2,500,000. CD 12/10/48.

▲ **Tex., Houston**—PLANT—United States Gypsum Co., 2411 Times St., gypsum mfg. plant, 30-acre tract, Ship Channel. $9,000,000.

▲ **Tex., Longview** — FACTORY, etc. — Bell & Gossett Co., Longview, new factory, $1,250,000; warehousing, $150,000, 13-acre site, 3 mi. out of Longview in Estes Industrial Dist. CD 7/21/54 under LB.

▲ **Va., Hornsbyville**—REFORMING UNIT, etc.-American Oil Co., 555 Fifth Ave., New York 17, N. Y., 7,600 bbl. per day reforming unit, 18,000 bbl. gas-oil desulfurization unit and 2 story office. $5,000,000.

▲ **Wash., Wenatchee**—POT LINES EXPANSION—Aluminum Co. of America, Alcoa Bldg., Pittsburgh, Pa., pot lines expansion at aluminum reduction plant. $2,000,000. CD 1/18/51.

▲ **Ont., Bancroft**—MILL—Bancroft Uranium Mines, Ltd., 25 Adelaide St., W., Toronto, mill, north of Belleville, $9,000,000. Kilborn Eng. Co., 36 Park Lawn Rd., Toronto, consult. engr. CD 8/12.

▲ **Que., Chicoutimi**—SMELTER and POWER DEVELOPMENT—Eastern Smelting & Refining Co. Ltd., 137 Wellington St. W. Toronto, Ont., nickel smelter and power development, $20,000,000. Chemical Constr. (Inter-American) Ltd., 244 St. James St. W., Montreal, consult. engr. CD 3/2/54.

UNCLASSIFIED

▲† **California**—NIKE SITES—U. S. Eng., 751 S. Figueroa St., Los Angeles, NIKE sites at various locations (Site 94) Control launcher and administration areas $1,000,000; (Site 40) control launcher, administration areas, $750,000 (Site 57) control launcher, administration areas, $75,000 (Site 73) control launcher and administration areas, $500,000.

▲ **Ill., Chester**—LINE CHANGES, etc.—Missouri Pacific R.R., W. H. Hobbs, ch. engr., Missouri Pacific Bldg., St. Louis 3, Mo., line change and grade revision on lines. $1,491,400.

▲ **Missouri**—UNDERGROUND GAS STORAGE RESERVOIR—Laclede Gas Co., 1037 Olive St., St. Louis, Zone 1, underground gas storage reservoir in 25,000 acre site, northeast of Florissant, St. Louis County, incl. buildings for compressors and dehydrators, series of pipe and valve sets at wellheads, etc. $10,000,000. Project upheld by courts to be in public interest. CD 7/24/52.

▲ **Utah-Colorado**—CRUDE PIPE LINE—Salt Lake Pipe Line Co., North Salt Lake City, Utah (subsidiary of Standard Oil Co. of California, 225 Bush St., San Francisco, Calif.) laying 182 mi. crude line from Rangeley, Colo., to Salt Lake City, Utah; 82 mi. new line will parallel existing line between the two cities. $7,280,000. CD 3/30/53.

IT'S A CONTRACTOR'S DREAM...

...the Davis Loader

Here's a worker that's really on the job when you need it... and one that's sure to earn its salt. It's the powerful Davis Loader that is designed to harness all the energy of your tractor and convert it into a labor- and time-saving machine. Just look at the jobs you can do with it... and by merely a flick of your wrist... digging basements, backfilling, loading trucks, grading, general clean-up, stripping for driveways or sidewalks... or anyone of 101 different things. It s rugged box-frame construction, double-strength lift arms, non-corrosive hydraulic system, down pressure on the lift arms, and streamlined design combine to make it the best loader buy on earth. What's more, it's priced less than you would expect to pay. Fits most popular tractors.

AVAILABLE ATTACHMENTS
■ MATERIAL BUCKET ■ DOZER
■ UTILITY BUCKET ■ CRANE
■ SCARIFIER

Send Coupon for FREE Literature

Please send me free literature on the Davis Loader to fit a _____ tractor.
Name _____
Address _____
Town _____ State _____

MID-WESTERN INDUSTRIES, INC. 1309 SOUTH WEST ST., DEPT. N. WICHITA, KANSAS

Diamond Core
Drilling
CORE BORINGS
for Foundations, Dams, Bridges and all Heavy Structures
GROUT HOLES
Tinney Drilling Co.
Grafton, W. Va.

GUNITE
Since 1915
CONCRETE
SAND AND CEMENT
"Placed by Air"
We have the equipment, personnel and experience to complete any and all GUNITE work regardless of size or location.
Send for specifications and bulletins
See our catalog in Sweet's
GUNITE CONCRETE & CONST. CO.
1301 WOODSWETHER RD., KANSAS CITY 5, MO.
2016 W. WALNUT, CHICAGO 12, ILL.
3206 HOUSTON, HOUSTON 9, TEX.
St. Louis - Milwaukee & Twin Cities - Denver
New Orleans - Memphis

IF IT'S A

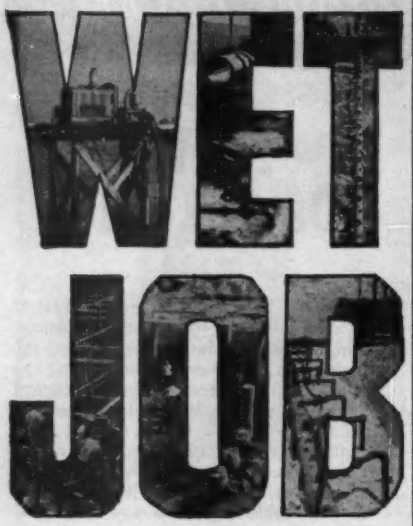

PLAY SAFE! ASK FOR A DEWATERING ANALYSIS BY

GRIFFIN

WELLPOINT CORP.

881 East 141st Street, New York 54, N. Y.
Hammond, Ind. Houston, Tex. Jacksonville, Fla.

POUR CONCRETE at LOWER COST

BUY EFCO STEEL FORMS

•

Lifetime steel faces never need replacing

•

Easy to handle and assemble

•

Save time, material, money

•

Low original cost

•

Other forms available on a rental basis

Write for catalog to

ECONOMY FORMS CORP.

HOME OFFICE • DES MOINES, IOWA

DISTRICT SALES OFFICES: St. Louis, Mo. • Kansas City, Mo. Lincoln, Nebr. • Minneapolis, Minn. • Ft. Wayne, Ind. • Milwaukee, Wisc. • Cincinnati, Ohio • Cleveland, Ohio Meluchen, N. J. • Rochester, N. Y. • Springfield, Mass. • Washington, D. C. • Decatur, Ga. • Dallas, Texas • Los Angeles, Calif. • Oakland, Calif. • Denver, Colo.

Bids—Low Bids—Contracts—Second Section

NEW ENGLAND

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

STREETS AND ROADS

September 13, 20 Massachusetts

▲† **Massachusetts**—BA 10/5—U. S. Eng., 111 E. 16 St., New York 3, N. Y., Hoosic River Basin, Flood Control Proj., Unit No. 3, North Adams. $2,500,000. Plans deposit $50. CD 8/19.

BUILDINGS—BA

▲ **Conn., West Hartford**—SCHOOL—BA 9/29—Town, School Bldg. Comm., Mrs. Gordon S. Spencer, secy., Town Hall, elementary school, Braeburn Rd. $2,248,000. Louis Drakos, 967 Farmington Ave., archt. CD 6/28/54.

HEAVY CONSTRUCTION—LB & CA

▲ **MASSACHUSETTS**—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston,
Central Constr. Co. of Lawrence, 6 Beacon Ave., Lawrence, Mass. LB $2,635,010, est. $3,000,000, highway relocation Route 3, Plymouth. Bids Aug. 23. CD 8/3.

BUILDINGS—LB & CA

▲ **Barr, Gleason & Barr, Inc.**, 501 Fifth Ave., New York, N. Y. CA $2,000,000, two DORMITORIES, Foss Hill, north of Main Campus, MIDDLETOWN, CONN. Wesleyan University, c/o Bd. Trustees, Middletown, Conn. CD 6/22.

▲ **F. H. McGraw & Co.**, 51 E. 42 St., New York 17, N. Y., CA, rehabilitation footwear products PLANT, NAUGATUCK, CONN. United States Rubber Co., 50 Maple St., Naugatuck, Conn.

MIDDLE ATLANTIC

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

September 14 Delaware

STREETS AND ROADS

September 14 Delaware September 20 New Jersey
September 22 New York

BUILDINGS—BA

▲ **Md., Baltimore**—APARTMENTS—BA 9/16—Terrace Apartment Corp., c/o Associated Architects & Engineers (George E. V. Stone, engr.) and (George B. Dolby, architect) 100 Vermont Ave. N.W., Wash., D. C. 14 story, masonry, concrete, steel Terrace Apartments, Hunt Club Lane north of Lake Ave. $3,000,000-$3,500,000.

HEAVY CONSTRUCTION—LB & CA

▲ **NEW YORK**—Bureau Contracts & Accounts, The Governor Alfred E. Smith State Office Bldg., Albany,
N. Y.—Del Balso Constr. Corp., 500 Zerega Ave., Bronx 72, N. Y., LB $761,830, est. $750,000 (3 bidders) Cross Bronx Expressway, Cont. 1C (Anthony Ave.-Longfellow Ave.). 1.22 mi. FACBE: 55-1, Bronx Co.;
N. Y.—Chenango Corp., 22 Beverly Lane, North Syracuse, N. Y., LB $431,085, est. $486,000 (6 bidders) 2.17 mi. City of Oswego, East River Rd. and E. First St. FAC. 55-15, Oswego Co.;
N. Y.—Louis Mayersohn, 36 State St., Albany, N.. Y., LB $664,853, est. $727,000 (5 bidders) Gouverneur-Edwards, Pts. 1 and 2, S.H. 1263-1389. 3.96 mi. FARC. 55-70, St. Lawrence Co.;
N. Y.—Asphalt Roadways Co., 1766 Main St., Buffalo 8, N. Y., LB $327,984, est. $380,000 (10 bidders) McNalls-Alabama, Pt. 1, S.H. 9338, McNalls-Alabama Pt. 1A, 3.88 mi. FARC. 55-68, FASH. 55-9, Niagara Co.;
N. Y.—Serafini Constr., Inc., Conklin Rd., Binghamton, N. Y., LB $300,029, est. $324,000 (5 bidders) Altamont Village, S.H. 849, Dunnsville-Altamont, S.H. 1279, 0.96 mi. FARC. 55-55, Albany Co.; LB $272,522, est. $345,000 (10 bidders) Chemung-Van Etten, C. R. 3, 1.71 mi. FASS 55-6, Chemung Co.;
N. Y.—Binghamton Bridge & Foundation Co., Inc., Binghamton, N. Y., LB $102,789, est. $135,000. (7 bidders) Berkshire-East Berkshire Co. Rd. 202 0.14 mi. FASS. 55-2 Tioga Co.;
N. Y.—Camarco Contractors, Inc., Route 6, Carmel, N. Y. LB $861,905, est. $1,112,000 (4 bidders) Brewster-Carmel, SH 909, 2.09 mi. FARC. 55-66, FGRC, 55-67, Putnam Co.;
N. Y.—S. J. Groves & Sons Co., Empire Bldg., Syracuse, N. Y., LB $1,433,953, est. $1,651,000 (4 bidders) Massena-South Side Route, Pt. 2 (Cont. 1) Massena-Helena, Pt. 1, S.H. 1261, 5.02 mi. FASH. 55-7, FARC. 55-60, St. Lawrence Co.;
N. Y.—Yonkers Contg. Co., Inc., 25 Mile Square Rd., Yonkers, N. Y., LB $139,677, est. $156,000 (1 bidder) New York State Thruway-Hudson Sect.-Subd. 10 (Ardsley Gas Station-Restaurant site) (Type CM) H.T. 55-6, Westchester Co.;
N. Y.—West Shore Concrete Co., Inc., Hillburn, Suffern, N. Y., LB $479,971, est. $644,000 (6 bidders) Suffern-Mt. Ivy, S.H. 1448, 1.6 mi. FARC. 55-56, Rockland Co.;
N. Y.—Green Island Constr. Co., 594 Broadway, Watervliet, N. Y., LB $634,266, est. $796,000 (5 bidders) Thomson-Ft. Edward, Pts. 1 and 2, S.H. 1685A 8.93 mi. FARC. 55-57, Washington Co.;
N. Y.—Depew Paving Co., Inc., 161 Woodlawn St., Depew, N. Y., LB $2,853,617, est. $3,350,000 (4 bidders) New York State Thruway-Erie Sect. Subd. E-8A (Camp Rd. to Bayview Rd.); Camp Rd. Interchange; Athol Springs-Hamburg, S.H. 1067; Buffalo-Hamburg, S.H. 2 and 3 Secondary Cross Roads. 2.33 (Acc. 4.59) mi. E.T. 55-6, S.T. 55-8, R.C. 55-71, Erie Co.;
N. Y.—Johnson, Drake & Piper, Inc., 86 Trinity Pl., New York 6, N. Y., LB $3,547,010, est. $4,950,000 (8 bidders) New York State Thruway-Erie Sect.-Subd. E-1B (Barden Rd. to Westfield) and 5 marginal or cross roads 5.32 (Acc. 1.94) mi. E.T. 55-4, S.T. 55-6, Chautauqua Co.;
N. Y.—The Lane Constr. Corp., Box 911, Meriden, Conn., LB $2,473,001, est. $3,268,000 (14 bidders) Marcy Hill-Trenton S.H. 931; Trenton-Remsen, S.H. 1144; Trenton-Prospect-Remsen, S.H. 5345; Trenton By-Pass 5.61 mi. FGRC. 55-64, FARC. 55-65. FASH. 55-8, Oneida Co.; LB $1,951,881, est. $2,212,000 (8 bidders) Bemis Heights-Schuylerville 9.61 mi. FASH. 55-1, Saratoga Co.;
N. Y.—W. A. Chapman, 43 Market St., Brockport, N. Y. LB $191,961, est. $224,000 (5 bidders) Yates-Lyndonville-Ridgeway, S.H. 581, FARC. 55-9, Orleans Co.;
N. Y.—Bero Constr. Corp., McKinley Bldg., Buffalo, N. Y. LB $2,845,338, est. $3,925,000 (7 bidders). N. Y. S. Thruway-Erie Sect. Subd. E-2A (Westfield to Forest Rd.) Westfield interchange and 3 secondary cross roads 4.73 mi. 2.88 Acc. mi. E.T. 55-5, S.T. 55-7, Chautauqua Co.; LB $1,350,843, est. $1,553,000 (5 bidders) Wayne-Keuka-Penn Yan, Pt. 1, S.H. 1779, Keuka-Penn Yan, Pts. 2 & 3, S.H. 8435, 8523, 8.62 mi. FARC. 55-62, Steuben and Yates Counties;
N. Y.—Walter P. Blimm Co., Inc., 44 Lincoln Ave., Lockport, N. Y., LB $445,741, est. $482,000 (6 bidders) North Tonawanda-Sanborn, Pts. 1 & 2, S.H. 643, 3.15 mi. FARC. 55-61, Niagara Co. Bids Aug. 25. CD 7/29.

▲ **NEW YORK**—Bureau Contracts & Accounts, The Governor Alfred E. Smith State Office Bldg., Albany,
N. Y.—Bates & Rogers Constr. Corp., 600 W. Jackson St., Chicago 6, Ill., LB $1,614,182, est. $1,941,000 (9 bidders) New York State Thruway-Erie Sect.-Subd. E7B (Shadagee Rd. and Eighteen Mile Creek Bridge and approach); Shadagee Rd. 0.4 mi. E.T. 55-3, S.T. 55-5. Erie Co.;
N. Y.—Matthew DeGroot, Gouverneur, N. Y., LB $458,222, est. $472,400 (6 bidders) Bush's Bridge E-243 East Robinson St. Exten. 0.4 mi. M 55-3, Erie and Niagara Counties;
N. Y.—H. L. Baughman, Inc., 1240 Jefferson St., Rochester, N. Y. LB $171,561 est. $223,000 (5 bidders) East River Rd. (County Rd.). 0.56 mi. FASS 55-1, Monroe Co.;
N. Y.—Binghamton Bridge & Foundation Co., Inc., Binghamton, N. Y., LB $175,830, est. $232,000 (7 bidders) 0.45 mi. Ellicottville-Machias, Pt. 1, SH. 9212. FARC. 55-69, Cattarugus Co.; LB $91,116, est. $120,000 (8 bidders) 0.18 mi. Blodgett Mills-Cortland, S.H. 881, FARC 55-58, Cortland Co.;
N. Y.—Hendrickson Bros., Inc., 63 N. Central Ave., Valley Stream, N. Y., LB $3,032,990, est. $3,337,000 (9 bidders) elimination of grade crossings of Long Island RR with various streets in the Hamlet of Baldwin and Village of Freeport, 0.35 mi. 1.56 RR mi. PSC. 7278, PSC. 8966, Nassau Co.;
N. Y.—Cedric W. Wood, 134 Ruskin Rd., Buffalo 21, N. Y., LB $243,338, est. $286,000 (5 bidders) 0.7 mi. Alden-Cowlesville, Pt. 2, S.H. 9040, Bennington-Attic, Pt. 1, S.H. 9042, FARC. 55-54, Wyoming Co.;
N. Y.—cancelled bids to have been opened Aug. 25, 0.08 mi. Rosendale-Tillson, C.R. 113, FASS. 55-4. Ulster Co., est. $275,000. Bids Aug. 25. CD 7/29.

▲ **Great Lakes Dredge & Dock Co., Morgan Bldg., Buffalo, N. Y., CA $3,490,039,** channel imprvs. at Chimney Island, near Ogdensburg, St. Lawrence Co. Spec. PA-5-11017, St. Lawrence Contr. No. 23, NEW YORK. The Power Authority of the State of New York, 270 Broadway, New York 7, N. Y. Bids Aug. 22. CD 8/23 under LB.

▲† **Arthur Venneri Co.**, 300 North Ave., Westfield, N. J. LB $2,998,304 (11 bidders) hospital, incl. utilities, site imprvs., Plattsburgh Air Force Base, PLATTSBURGH, N. Y. U. S. Eng., 111 E. 16 St., New York 3, N. Y. Bids Aug. 4. CD 6/30.

▲ **MARYLAND**—State Rds. Comn., 108 E. Lexington St., Baltimore, Zone 2,
C. J. Langenfelder & Son, Inc., 8427 Pulaski Hy., Baltimore, Md., CA, $2,348,878, section of approach expressway 0.833 mi. incl. portion of toll plaza, 0.868 mi. access roads, 2 bridges 350 ft. and 166 ft. Patapsco Tunnel Proj., Contr. PT-107. Bids July 21. CD 7/25, under LB.

BUILDINGS—LB & CA

▲ **Crown Havenhomes** c/o Stanley H. Klein, archts., 89-31 161 St., Jamaica, N. Y. Owner Builds. $6,000,000. 400 HOUSES, Newbridge and Merrick Rds., BELLMORE, N. Y.

▲ **South Oaks at Freeport**, c/o Lane Realty, 107-40 Queens Blvd., Forrst Hills, N. Y. Owner Builds. $1,700,000. 107 HOUSES, South Long Beach Ave., FREEPORT, N. Y.

▲ **Caristo Constr. Corp.**, 26 Court St., Brooklyn 2, N. Y. LB $4,267,000, (4 bidders) general constr. Aviation Trades HIGH SCHOOL, Queens Blvd., 47 Ave., 35 and 36 Sts., LONG ISLAND CITY, N. Y. Bd. Educ., Bureau Constr., 42-15 Crescent St., Long Island City 1, N. Y., Bid Aug. 16. CD 7/18;
Forsythe Plumbing & Heating Corp., 234 W. 55 St., New York 19, N. Y., LB $368,639 (8 bidders) plumbing (Long Island City, N. Y.);

Afgo Eng. Corp., 475 Adelphi St., Brooklyn 17, N. Y., LB $510,340 (8 bidders) heating (Long Island City, N. Y.);

▲ **Chapel Hill Homes**, c/o Lorenzo D. Bement, South Grove St., Freeport, N. Y. Owner Builds. $12,000,000. 1,000 HOUSES, Washington Ave. and Vanderbilt Parkway, NORTH BRENTWOOD, N. Y.

▲ **Roslyn Hill Country Estates**, c/o Harry Schwartz, pres., 10 E. 23 St., New York 10, N. Y. Owner Builds. $42,000,000, 1,500 HOUSES, 368-acre tract, ROSLYN, N. Y. Michael Radosiovich, c/o owner, archt.

▲ **South Oaks at Woodbury**, c/o Lane Realty, 107-40 Queens Blvd., Forest Hills, N. Y. Owner Builds. $1,800,000. 90 HOUSES, Woodbury Rd., east of South Oyster Bay Rd., WOODBURY, N. Y.

▲ **Palladino Bros.**, 1937 Williamsbridge Rd., New York 61, N. Y. Owner Builds. $2,000,000. 105 HOUSES, Gomer St. to be called Sunnyridge Estates, YORKTOWN HEIGHTS, N. Y.

▲ **Joseph L. Mascarelle, Inc.**, 42 First St., Hackensack, N. J., CA Total Est. exceeds $10,000,000. SHOPPING CENTER incl. 2 story bsmnt., 340,000 sq. ft. Bamberger Store, underground delivery tunnel, utility plant, water tower, PARAMUS, N. J. Garden State Shopping Center, c/o R. H. Macy, Herald Square, New York, N. Y. Abbott Merkt & Co., 10 E. 40 St., New York 17, N. Y., archts.-engrs. CD 5/28/52.

▲ **Becker & Lipschitz**, 4411 N. Broad St., Phila., Pa. Separate Contracts. $2,500,000. RESIDENTIAL DEVELOPMENT, Rte. 202, CHALFONT, PA.

SOUTH

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

September 20 Florida

STREETS AND ROADS

September 21 Louisiana

HEAVY CONSTRUCTION—LB & CA

▲† **F. & C. Eng. Co.**, Box 2426, Houston, Tex. LB $9,892,629. (8 bidders) Low-Sill structure, Old River Control Concordia Parish, Inv. 5-6-2, LOUISIANA U. S. Eng. foot of Prytania St., New Orleans, La. Bids Aug. 26. CD 8/24.

MIDDLE WEST

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

September 27 Ohio

STREETS AND ROADS

September 27 Ohio

BUILDINGS—BA

▲ **Ill., Centralia** — HOSPITAL, etc. — BA 9/15 — St. Mary's Hospital, Centralia, 1, 2, 3 and 4 story 100-bed hospital, chapel, nurses home, boiler house, etc. $2,500,000. Extended date. Maguolo & Quick, 4908 Delmar Blvd., St. Louis 8, Mo., archts. CD 8/1.

HEAVY CONSTRUCTION—LB & CA

▲ **ILLINOIS**—State Div. Hys., Centennial Bldg., Springfield,

Allied Structural Steel Co., 20 N. Wacker Dr., Chicago 6, Ill. CA $2,413,048, furnishing, structural steel and cast steel for 10 spans of bridge over Illinois River, F.A. 9, Peoria, Peoria Co. Bids Aug. 9, awarded Aug. 25. CD 8/15, under LB.

▲ **Ragnor Benson, Inc.**, 4744 W. Rice St., Chicago, Ill. CA, $3,000,000. mail handling facilities addns., tunnel and track work, CHICAGO, ILL. Chicago Union Station Co., Canal St. and Jackson St., Chicago, Ill. Awarded Aug. 23.

BUILDINGS—LB & CA

▲ **J. J. Altman & Co.**, 2950 Illinois Ave., East St. Louis, Ill., CA $2,383,000. general contract 2 story, brick, masonry, steel, rein.-con. HIGH SCHOOL, 51 and State Sts., EAST ST. LOUIS, ILL. Bd. Educ., East St. Louis School Dist. No. 189, 240 N. 6 St., East St. Louis, Ill. Bids Aug. 18, awarded Aug. 25. CD 8/26, under LB;

E. J. Maag Plumbing & Heating Co., East St. Louis, Ill., CA $738,686, plumbing and heating work (East St. Louis, Ill.).

WEST OF MISSISSIPPI

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

BRIDGES

September 15 Knasas

STREETS AND ROADS

September 15 Knasas

▲† **Texas**—BA 9/20—U. S. Eng., 100 W. Vickery Blvd., Fort Worth, Hampton Road Water Pumping Plant, Dallas Floodway, Trinity River. $3,000,000. CD 6/9/44.

HEAVY CONSTRUCTION—LB & CA

▲ **Lippert Brothers**, Boone, Iowa, LB $1,830,000, est. $1,600,000, (7 bidders) water treatment plant, ST. CLOUD, MINN. City, A. J. Haberkorn, clk., St. Cloud, Minn. Bids Aug. 23. CD 7/20.

▲ **Missouri Public Service Co.**, Richard C. Green, exec. vice pres., Warrensburg, Mo., Own Forces, $3,950,000. Proj. 1, Sch. G-3, incl. 10¾ in. O.D. steel gas transmission line New Franklin to Chillicothe, Mo. and 8⅝ in. line, Chillicothe to Trenton and laterals to serve towns in North Center Missouri, distr. systems in various towns, MISSOURI.

BUILDINGS—LB & CA

▲ **Cone Mills, Inc.**, Greensboro, N. C., indefinitely postponed constr. of textile MILL, $7,000,000; PRODUCTS STORAGE or WAREHOUSING, $250,000, SAN MARCOS, TEX. CD 4/18.

▲ **J. B. Gill Co.**, 2901 Orange St., Long Beach, Calif., CA Est. $3,000,000. GAS FRACTIONATION PLANT, NEWCASTLE, WYO. Natural Gas Products Co., Newcastle, Wyo.

FAR WEST

HEAVY CONSTRUCTION—BA

STATE HIGHWAY LETTINGS

STREETS AND ROADS

September 21, 22, 28 California

▲ **California** — BA 10/25 — Oakdale-Irrigation District and South San Joaquin Irrigation District, 322 E. "D" St., Oakdale, dam and power plant, Tulloch Dam and Power Plant, part of Tri-Dam Proj. $8,000,000. International Eng. Co., 74 New Montgomery St., San Francisco, engr. CD 12/10/52.

HEAVY CONSTRUCTION—LB & CA

▲† **Westinghouse Electric Corp.**, P. O. Box 868, Pittsburg, Pa. CA $6,338,491. furnishing generators for Chief Joseph Dam, Bridgeport, WASHINGTON. U. S. Eng., 4735 E. Marginal Way, Seattle 4, Wash. CD 2/4, under LB.

BUILDINGS—LB & CA

▲ **Snitily Bros. Constr. Co.**, Wenatchee, Wash., CA, Total Est. $2,000,000, excavation, grading, utilities, foundations, etc. for ALUMINUM PLANT. addn., WENATCHEE, WASH. Aluminum Co. of America, Alcoa Bldg., Pittsburgh, Pa. CD 8/25.

Bethlehem Pacific Coast Steel Corp., 3631 E. Marginal Way, Seattle, Wash., CA, steel frame work (Wenatchee, Wash.);

Great Northern Ry. Co., 175 E. 4 St., St. Paul, Minn., CA, track relocation (Wenatchee, Wash.).

▲ **Combustion Eng. Inc.**, 510 W. 6 St., Los Angeles, Calif., CA $5,737,451, two boiler units at Scattergood STEAM GENERATING PLANT, LOS ANGELES, CALIF. Los Angeles Dpt. Water & Power, 311 S. Spring St., Los Angeles, Calif. Bids July 5. CD 7/15, under LB.

CANADA

HEAVY CONSTRUCTION—LB & CA

▲ **Canamont Constr. Ltd. & Canit Constr. Ltd.**, 507 Place d'Armes, Montreal, Que., CA, $7,107,480, Cote Ste. Catherine Lock and approaches in Lachine section of St. Lawrence Seaway Proj., Lachine, QUEBEC. St. Lawrence Seaway Auth., 1225 No. 2 Temporary Bldg., Ottawa, Ont. Bids Aug. 23, awarded Aug. 26. CD 8/1.

BUILDINGS—BA

▲ **Louis Ouellon**, 112 Roseberry Ave., Campbellton, N. B., CA, $2,398,448, (3 bidders) 300-bed provincial mental HOSPITAL addn., CAMPBELLTON, N. B. New Brunswick Dpt. P. Wks., Parliament Bldg., Fredericton, N. B. Bids Aug. 12, awarded Aug. 23. CD 8/1.

▲ **Fluor Corp. of Canada Ltd.**, 200 Bloor St. E., Toronto, Ont., CA, $5,000,000 (3 bidders) CATALYTIC REFORMER, incl. naptha processing equip., towers and tanks, SARNIA, ONT. Imperial Oil Ltd., 445 S. Christian St., Sarnia, Ont. Bids Aug. 15, awarded Aug. 25. CD 8/2.

AMERICANS ABROAD

HEAVY CONSTRUCTION—BA

▲ Bids will be taken on November 2 on the following project under International competitive bidding of NATO.

FRANCE

Service Special des Depots d'Hydrocarbures, French Ministry of Industry & Commerce, 85 Boulevard Montparnasse, Paris, supply and installation of 55 kilometer sect. of the Marseille-Langres pipe line between Lavera and Saint-Remey. $2,000,000. Interested firms must register their intention to bid before September 5.

▲† **Spain**—Bids Asked—Brown-Raymond-Walsh, Prime Contractors, Eng. Dpt., Edificio Espana, Madrid, Spain, pol storage and distribution systems at Rota, Moron, Torrejon and Zaragoza, for Bureau Yards & Docks, Navy Dpt., U. S. A. Plans will be available in September to American firms who have done comparable work within the last three years.

FOREIGN

HEAVY CONSTRUCTION—BA

▲ **Africa, Southern Rhodesia**—BA 11/25—Federal Hydro-Electric Bd, 1 Park St., Salisbury, concrete arch dam with spillway across gorge, underground power house intakes, tail race tunnels, shafts and other works, Kariba Scheme, Zambesi River, 40 mi. upstream from Chirundu. £12,000,000. Sir Alexander Gibb & Partners, Queen Anne's Lodge, London, S. W. 1, England, engrs. CD 7/29.

(Proposal Advertisements see pp. 82 to 86)

WELDED
STEEL
PLATE
FABRICATION

- Boiler Casings
- Boiler Breechings
- Flues and Ducts
- Condenser Shells
- Condenser Piping
- Heavy Turbine Housings
- Fan and Blower Housings
- Dust Collector Housings
- Industrial Gas Mains
- Expansion Joints
- Hoppers and Bunkers
- Tanks and Vats
- Pressure Vessels
- Wind Tunnels
- Crane Bridge Girders
- Trolley Frames and Trucks
- Rigid Frames
- Roll-Over Fixtures
- Tank Turrets
- Gun Mounts
- Heavy Truck Bodies
- Engine Frames and Bases
- Crawler Frames
- Press Platens and Beds
- Press Columns
- Heavy Machinery Parts and Assemblies
- Gas Seal Hoods for Blast Furnaces
- Furnace Roof Rings
- Heavy Repair Welding
- Design Conversion of Castings to Weldments

MACHINING

- Complete Machining Service—Facilities for Heavy Work of Unusual Dimensions

STRUCTURAL STEEL

- For Buildings, Bridges and Special Purpose Structures
- Drum Gates
- Roller Gates
- Taintor Gates
- Taintor Valves
- Protection Angles

THE R. C. MAHON COMPANY
DETROIT 34, MICHIGAN
MAHON

MATERIALS AND LABOR PRICES

Market quotations on construction materials and wage rates reported monthly by ENR correspondents
October Materials, and Labor Prices, will appear in October 6, 1955 issue

CEMENT, AGGREGATE, READY-MIXED CONCRETE—F. O. B. CITY

	PORTLAND CEMENT* Per bbl. C/L lots cash, dis. not deducted			SAND AND GRAVEL Per ton, carload lots Gravel, 1½ in.	Gravel, ¾ in.	Sand	CRUSHED STONE Per ton, carload lots 1½ in.	¾ in.	CRUSHED SLAG Per ton, carload lots, f.o.b. plant 1½ in.	¾ in.	CONCRETE BLOCK 8 x 8 x 16-in.; truckload del.; per block Sand grav.	Lt. wgt. agg.	CONCRETE Ready Mixed 1:2:4; over. 50 c.y., del.
	Paper	Bulk	Mortar										
Atlanta	$3.97a	$3.56a	$3.40	$2.75	$2.75	$2.50‡	$2.14	$2.24	$1.45	$1.65	$0.18	$0.195	$12.25g
Baltimore	4.16a	3.75a	3.63	2.70‡a	2.70‡a	2.20‡a	2.75‡a	2.80‡a	1.95‡a	1.90‡a	.18	.18a	12.15
Birmingham	3.72	2.75e	....	2.53n	2.53n	2.08n	2.75	2.75	1.35	1.55	.165	.165	11.00
Boston	4.47b	4.11b	4.06	3.00a	3.00a	3.00a	1.60a	1.75a	.....	.....	.23	.265a	13.00h
Chicago	3.73a	3.32a	3.25	3.60‡b	3.60‡b	3.75‡b	3.50‡b	3.50‡b	2.25‡	2.25‡	.23	.23b	12.50
Cincinnati	3.95c	3.55c	3.73	2.19‡c	2.24‡c	2.24‡c	2.54‡c	2.54‡c	.....	.....	.18	.225a	11.60
Cleveland	N. A. in C. L.	3.34e	....	2.05ef	1.85f	1.65	4.10‡a	4.10‡a	3.35‡	3.15‡	.....	.22	15.45
Dallas	3.15a	2.85a	2.93	2.18	2.28	1.84	2.22	2.38	.....	.....	.11e	.2675	9.40
Denver	4.44a	3.94a	4.44	1.85	2.00	1.20	.....	.....	.....	.....	.23	.255a	10.50
Detroit	3.89a	3.30a	3.54	4.50‡b	4.50‡b	4.00‡b	3.75‡	3.75‡	4.25‡	4.25‡	.21	.24a	12.80
Kansas City	4.10b	3.90b	3.90	1.65	1.65	2.00‡a	2.00‡a	2.00‡a	.....	.....	.20a	.24c	12.75b
Los Angeles	4.92ch	4.48ch	5.40	2.31‡a	2.51‡a	2.31‡a	2.16‡a	2.31‡a	.....	.....	.135fm	.245m	12.37ih
Minneapolis	4.20a	3.79a	3.71	2.70‡ag	2.70‡ag	1.60‡ag	3.25‡ag	3.25‡ag	.....	.....	.19j	.....	12.75f
Montreal	3.11d	2.86d	....	2.20e	2.20e	2.25e	1.90i	2.20i	.....	.....	.17	.17a	10.80ek
New Orleans	3.50a	3.40a	3.45	2.44	2.44	2.00	....	....	1.45	1.65	.275	.....	12.90
New York	4.26a	3.85a	3.63	3.05bk	3.05bk	2.00bk	2.70bl**	2.70bl**	.....	.....	.....	.....	15.50an
Philadelphia	3.73/4.12‡a	3.42/3.79‡a	3.58/3.63‡	2.85‡ep	2.85‡ep	2.35‡ep	2.45‡	2.55‡	2.00	2.35	.22/.26	.....	13.20eo
Pittsburgh	3.75a	3.56a	3.75	2.40‡	2.40‡	2.20‡	2.60‡	2.60‡	2.15	2.15	.25d	.31	14.00
St. Louis	3.70/3.93c	3.25/3.51c	3.55/3.72	3.25am	3.00am	2.40/3.00am	1.60j	1.70j	1.50	1.50	.22	.28c	12.90
San Francisco	3.83c	3.39c	....	2.07	2.07	2.17	2.22	2.22	.....	.....	.....	.28cl	12.15c
Seattle	4.80a	3.55a	5.95h	3.50‡bm	3.50‡bm	3.50‡bm	4.00‡bm	4.00‡bm	.....	.....	.26	.3515	13.30f
Toronto	4.00	3.77	4.00	2.25	2.25	1.85	2.00	2.00	2.00	2.00	.25	.35c	14.95

‡ Delivered. * Prices incl. dealers discount except as noted.

CEMENT: *a Less 10¢ disc, 15 days. *b Less 2% disc, 15 days. *c Less 10¢ disc, 10 days. *d Truckload lots, deliv. 10¢ disc, 20 days. *e Truckload lots, destination price. *h LCL.

SAND GRAVEL, STONE & SLAG: *a Truck lots. *b Per cu. yd. *c 5 tons or more. *e ½". *f Pea gravel. *g Less 5% for cash. *h Less than 5 tons. *i Sales tax incl. *j F.o.b. quarry. *k Barge lots asd. *l F.o.b. scow Hudson river. *m Less 2% for cash. *n F.o.b. cars. *o 1-3 mi zone. *p Add 10¢ for ea. add'l mi zone. *** $2.80 eff 9/16.

CONCRETE BLOCK: *a Cinder *b Waylite. *c Haydite. *d Celocrete *e 5¼ x 8 x 12 in. *f 8 x 4 x 16. *g F.o.b. truck at job. *i Less 2% for cash *j F.o.b. plant San Rafael. *m F.o.b. yard.

READY MIXED CONCRETE: *a 5 cu. yds. or over del. Man. *b 25 cu. yds or more. *c 10-100 cy. brackets. *d 1-3 mi. zone. *e 2,000 lb comp. *f 2,500 lb. comp. *g Less 25¢ disc, 15 days. *h Less 50¢ for cash. *i 5% off for cash. *j 2% off for cash. *k Federal tax included. Add 5% mum. & prov. *l 1:2½:3½. *m F.o.b. yard. *n Plus escalator clause. *o Add 15¢ for ea. add'l 3-mi zone.

CASH DISCOUNTS CEMENT to Contractors: Truck delivery, 2% for cash on 10th of month; on carload deliveries, no trucking, same as dealer cash discount 10¢ per bbl. for payment within 15 days of date of invoice. Subject discount 10¢ per bbl. 20 days in Montreal.

CURRENT MAXIMUM PRICES AT CEMENT MILLS

Charge for bags not included. For paper bags add 40¢ per bbl., not refundable.

	Bulk		Bulk		Bulk		Bulk		Bulk
Richard City, Tenn.	$2.90†	Buffington, Ind.	$2.85†	Steelton, Minn.	$2.95†	Muskegon, Mich.	$3.00†	Toledo, O.	$2.90†
Clinchfield, Ga.	2.90†	Independence, Kan.	2.80†	Leeds, Ala.	2.75†	Saginaw, Mich.	3.00†	Milwaukee, Wis.	3.05†
Kingsport, Tenn.	2.90†	Hannibal, Mo.	2.85†	Duluth, Minn.	2.95†	Wyandotte, Mich.	3.00†	Green Bay, Wis.	3.05†
West Des Moines, Iowa	2.95†	Northampton, Pa.	2.90†	Hudson, N. Y.	2.75†	Buffalo, N. Y.	3.00†	Ironton, O.	2.90†
Nazareth, Pa.	2.90†	Universal, Pa.	2.95†	Alpena, Mich.	2.90†	Oswego, N. Y.	3.15†	Montreal City	2.55
Bath, Pa.	2.90†	Waco, Tex. (+ 10¢ tax)	2.85†	Detroit, Mich.	3.00†	Cleveland, O.	2.95†	W. Winfield, Pa.	3.00†

† *Prices to hold for third quarter of* 1955.

PAVING BRICK, BLOCK, ASPHALT, ROAD OILS—F. O. B. CITY

	PAVING BRICK AND BLOCK Granite Per M lots of 50,000 4x4x8 in.	Brick per M 3x4x8½ in. carload lots	Wood per sq. yd. 3½ in. 10-lb. treat	PAVING ASPHALT Per ton, less than 80 penetration Tank car	Drums	ASPHALT BINDERS—FLUXES Per gal., 80-300 penetration Tank car	Drums	CUTBACK ASPHALT MC Per ton Tank car	Drums	ROAD OIL Per gal. Tank car	ASPHALT EMULSION RSI Per gal. Tank car	Drums
Atlanta	.....	.....	.....	$26.00	$33.25	$0.115	$0.23	$0.125fw	$0.27fw	$0.15	$0.15	$0.25
Baltimore	150.00‡	75.00‡	.....	21.00i	.....	.085i	0.175i	.09iwB	.18iwB	.09i	.095i	0.185i
Birmingham	.....	57.50i	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Boston	.....	.....	.....	22.00a	23.00a	22.00av	22.00av	.09wF	.....	.10a	.145aG	.22aG
Chicago	155.00‡	85.00‡b	3.50/3.55‡f	19.85bj	29.85b	18.85bv	28.85bv	.094bwH	.1740bwH	.0725b	.....	.....
Cincinnati	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Cleveland	200.00	73.00d	5.03c	23.00A	.....	23.00A	.....	.1025AwF	.....	.....	.1025AG	.18AG
Dallas	e	40.00	e	24.05	43.00	.1016	.2103	28.91	50.44	.098	.1067	.1960
Denver	.....	50.00	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Detroit	.....	104.00	.....	27.21	.....	27.21v	.....	.135wf	.....	.0966	.....	.211
Kansas City	e	e	e	15.00cl	.....	17.50v	.....	.07vwJ	.....	.055c	0.11	.....
Los Angeles	e	.....	e	16.00dmz	.....	16.00dzK	.....	18.00dzK	.....	17.00dv	.0825f	.1725f
Minneapolis	.....	.....	2.97A	25.00	.....	25.00	.....	0.105v	.....	0.095	.1075	.....
Montreal	e	e	e	27.00n	39.60n	.135n	.198n	16.50nuB	20.90nuB	.132n	.197ns	.289ns
New Orleans	.....	.....	.....	17.50e	....e	17.50ev	....e	.085ew	....e	.085P	.085BS	.....
New York	.....	.....	2.85f	23.89qCD	44.32qD	22.89stCD	43.57stD	.1023vCDf	.1889wDF	.....	.1023CD	.1918P
Philadelphia	175.00	110.00	4.06	22.00	.....	.....	.....	.09uF	.....	.....	.....	.....
Pittsburgh	185.00	48.00	4.60	27.00	38.00	.10	.21	27.00B	40.00B	.098	.11	.234
St. Louis	.....	.....	.....	18.76f	.....	.1704	.....	.0863wH	.....	0.1575	.10	.....
San Francisco	.....	67.50v	.....	17.50g	33.00gp	17.50gkv	33.00gkv	20.00gH	37.50gH	18.75v	.085y	.....
Seattle	.....	.....	.....	17.50A	38.00A	17.25kv	.....	24.50K	.....	19.75kv	.085A	.095w
Toronto	.....	.....	4.03	23.80	46.67	0.19	0.24	0.20v	0.25v	0.17	0.20	.24

h Delivered.

PAVING BRICK & BLOCK: *a CL. *b 3 x 4 x 8. *c 2½ x 8½ x 4. *d LCL, truck deliveries. *e Not used. *f 2" interior 6# treat. *g 3" *h 2" tr, 8# *i 3 x 3½ x 8½. *j 2½", 6 lb. tr.

ASPHALTS: *a Price at plant, Everett, Mass. *b F.o.b. refinery, Lockport, Ill. *c F.o.b. Sugar Creek, Mo. *d F.o.b. refinery, El Segunda. *e F.o.b. Baton Rouge. *f F.o.b. Hartford. *g F.o.b. Richmond, Calif. *h F.o.b. Martinez. *i F.o.b. refinery, Baltimore. *j F.o.b. refinery, Inglewood, Calif. *k 50-110 penetr. *l Less than 100 penetr. *m 40/80 penetr. *n Tax incl. *o Drums not avail. Shipped in steel bbl. *q 40/85 penetr. *r In customer's drums. *s Shipped in drums, per drum. *t 85/200 penetr. *u Per 100 gal. *v Per ton. *w Per gal. *x Also tank trucks. *y F.o.b. Oakland. *A F.o.b. refinery, Cleveland. *B F.o.b. Destrehan, La. *C Bulk. *D Prices based on transporting to Manhattan via truck. *E RC. *F Also RC. *G Also MS, SS. *H RC 0-5 incl. *I MC 4. *J MC, RC .0675. *K MC 3, 4 & 5. *L MS. *M MC 1-5, RC 1-5, .089. *N MC 3. *P F.o.b. refinery Savannah: $0.09/gal., tank cars; $0.20/gal., drums.

IRON AND STEEL PRODUCTS—PER 100 LBS. BASE MILL PRICES

	STRUCT SHAPES—	PLATE CARBON STEEL	REINF BARS billet	RIVETS ½-in. structural	SHEET PILING Base	STEEL RAILS Per Net Ton Standard	STEEL RAILS Per Net Ton Light	TRACK SUPPLIES Angle Bars	TRACK SUPPLIES Std Spikes	TRACK SUPPLIES Tie Plates	TRACK SUPPLIES Track Bolts
Birmingham Area	$4.60	$4.50	$4.65	$9.25	....	$94.50	$113.00	$5.825	$7.90	$5.625	....
Chicago Area	4.60	4.50	4.65	9.25	$5.45	94.50	113.00	5.825	7.90	5.625	$11.50
Pittsburgh Area	4.60	4.50	4.65	9.25	5.45	94.50	113.00	5.825	7.90	5.625	11.50
Buffalo Area	4.60	4.50	4.65	9.25	5.45	94.50	113.00	5.825	7.90	5.625	11.50
Cleveland	....	....	4.65	9.25	5.45	.....	.....	....	....	....	11.50
Youngstown Area	....	....	4.65	....	....	.....	.....	....	7.90	....	....
Geneva	4.60	4.50	....	....	....	.....	.....	....	....	....	....
Los Angeles	....	....	....	....	5.45	.....	.....	....	7.90	....	....
Pueblo	4.90	5.35	5.10	....	....	.....	98.00	5.825	7.90	5.625	12.40

IRON AND STEEL PRODUCTS—F. O. B. WAREHOUSE, PER 100 LBS., BASE PRICE

	STRUCTURAL SHAPES Per 100 lb. base price	REINFORCING BARS Per 100 lb., base price: 5 tons to carload lot New billet	REINFORCING BARS Rail steel	EXPANDED METAL LATH‡ Per 100 sq. yd., carload lots Std. diamond mesh. 3.4 lb.	EXPANDED METAL LATH‡ Std. ribbed 3.4 lb.	WELDED FABRIC REINFORCING Per 100 sq. ft., carload lots fob mill
Atlanta	$7.63	$7.42	$7.42	$38.00‡	$42.00‡	
Baltimore	7.63	7.00j	....	44.00	47.00	
Birmingham	7.40	7.20f	7.20f	51.00p	57.00p	
Boston	8.13a	7.82	7.82	44.00	48.50	
Chicago	7.28	6.23gu	6.23gu	46.00‡	56.00‡	
Cincinnati	7.75ak	7.56rv	....	42.50mn	50.00mn	
Cleveland	7.91	6.41c	....	41.00‡	45.50‡	
Dallas	9.05	7.25	7.25	49.00	52.00	
Denver	8.75	7.80c	....	48.00n	57.00mn	
Detroit	8.00	7.31	....	50.50	60.50	
Kansas City	7.95a	7.75	....	48.00	51.50	
Los Angeles	8.15fd	7.60	....	54.50	60.50	
Minneapolis	7.64d	8.06b	8.06b	42.50	47.00	
Montreal	7.70-8.15i°/7.75-8.15i	6.75i	8.65i	46.00h	51.00h	
New Orleans	....	6.20akz	....	66.00	60.00	
New York	7.77	7.35y	7.35y	44.50mn	51.00mn	
Philadelphia	7/7.15	7 30/7.45	....	38.00‡	42.00‡	
Pittsburgh	6.98	7.37z	6.95	39.78	41.90	
St. Louis	7.68e	6.75c	6.75c	55.00l	56.00l	
San Francisco	8.20	7.45j	....	44.00	52.25	
Seattle	5.35e	7.00cj	....	53.50mr	59.50mr	
Toronto	8.00*	6.55	6.55	53.50n	67.50n	

Quantity extras, per cwt: under 100‡, +$3; 100-399‡, +$2; 400-999‡, +1.25; 1000-1999‡, +80¢; 2000-4999‡, base price; 5000-9999‡, −10¢; 10,000-19,999‡, −30¢; 20,000-29,999‡, −60¢; 30,000‡ and up, −70¢

EXTRAS, per cwt:—*Quantity: less than 700‡, +50¢; 700-1499‡, +25¢; 1500-7999‡, +10¢; *Size: #2, +$2.30; #3, +81.10; #4, +80¢; #5, +62.5¢; #6, #7, +45¢; #8, #9, #10, +30¢; *Bending: heavy, +80¢; light, +$2 (except in New York City and surrounding metropolitan area where bending must be done on the job) *Engineering (details and placing from designs by others): over 500 tons, +45¢; 200-500 tons, +60¢ but not over $4500; 20-200 tons, +60¢ but not over $240; under 5 tons, +85¢ but not over $70 *Design only: +60¢

‡ Delivered *a 2000-9999‡ *b 10,000-15,999‡, fob city *c 20 tons or over *d 10,000-19,999‡ *e fob plant *f incl. delivering in free zone *g CL. *h list price; dominion tax exempt; add provincial and municipal taxes *i add dominion, provincial and municipal sales taxes *j intermediate and hard grade *k fob city *l delivered; contractor to do unloading *m copper alloy *n LCL *o asphalt coated *p del. of 500 sq. yd. or more. *r 2% off for cash *s 2,000-4,999‡ *t add 15¢ del. *u add 6.25¢ switch *v incl 15¢ del. *x add 5¢ switch *y add 30¢ del. *z add 10¢ del. *A American made. *C Canadian made. † Number system replaces inch system of classifying bar sizes. New system is based on number of eighth inches in diameter of bar. *• Aver. of Canadian & American.

PLUMBING, HEATING, WATER, SEWER AND DRAIN PIPE

	C. I. PIPE PRICE INDEX*	ASBESTOS CEMENT PIPE per lin. ft. f.o.b. city 6" Pr Cl. 150	ASBESTOS CEMENT PIPE per lin. ft. f.o.b. city 12" Sew Cl. I	VITRIFIED SEWER PIPE Per foot, Delivered ASTM C13-44T std. 8 in. s.s.	12 in. s.s.	24 in. ds.	36 in. ds.	CLAY DRAIN TILE ASTM C4-24 Per 1,000 ft., carload lots, f.o.b. 6 in.	8 in.	CONCRETE SEWER PIPE Per ft., delivered: ASTMC 14-41 12 in.	24 in.
Atlanta	113 6	$1.52	$2.53	$ .545	$1.27	$4.82	$12.925	....	.....	$0.90m	$3.40m
Baltimore	122.9	1.52	2.53	.574	1.07	4.455s	11.7875	$178.20	$274.80	.99	2.70
Birmingham	109 3	1.52	2.53	.42	.75	3.30w	10.50w	260.00‡	400.00‡	1.25m	2.75m
Boston	125 5	1.54	2 32	.609grt	1.1745grt	4.815grt	12.505grt	187.80r	289.20r	1.54mq	3.65mq
Chicago	126.0	1.52	2 32	.77m	1.45m	6.25m	19.00m	180.00‡	270.00‡	.80	2.80
Cincinnati	119.5	1 54	2 40	.644t	1.242t	4.77t	12.1975	240.00	370.00	.80m	2.98m
Cleveland	126.8	1 54	2 40	.546e	1.053a	4.32t	11.48t	158.00m	245.60m	.85m	3.25m
Dallas	125.7	1.54	2 66	.420	.700	4.00b	9.175	.....	.....	.40	1.90
Denver	131.4	1.62	2 66	.45n	.78n	3.48n	....	.....	.....	.74m	2.50m
Detroit	126.8	1.54	2.40	.80	1.50	5.95	16.40	230.00m	350.00m	.95	3.82
Kansas City	124.7	1.54	2.40	.56	1.00	4.13	11.20	260.00	480.00	.90	3.25g
Los Angeles	131.1	1.62	2.32	.67l	1.46l	5.97l	14.89l	228.20l	348.90l	.95	2.78l
Minneapolis	131.0	1.57	2.53	.76mo	1.38mo	5.70mo	....	.....	.....	1.66h	4.47h
Montreal	.....	....	....	1.07u	1.73u	5.52u	8.93u	.....	.....	1.17h	3.11j
New Orleans	116.0	1.52	2.53	.51	.925	4.91	....	280.00p	480.00p	.55	2.29
New York	121.5	1.54	2.32	.77	1.47	5.75	14.99	.....	.....	1.15	3.00
Philadelphia	120.9	1.52	2.32	.65	1.25	4.95r	12.65r	200.00‡	380.00‡	1.00h	3.95h
Pittsburgh	127.5	1.54	2.32	.468m	.864m	3.56m	9.78m	152.00	244.00	1.05h	2.50h
St. Louis	120.5	1.52	2.40	.56	1.03	4.22	9.80	180.00l	380.00l	1.30l	2.80l
San Francisco	131.1	1.62	2.32	.74d	1.62d	6.50d	16.47d	235.00l	392.00l	1.05m	3.30m
Seattle	131.1	1.62	2.32	.51b	.91b	.....	....	150.00r	.....	90h	2 85h
Toronto	....	....	....	.76	1.425	5.70	....	187.00	280.00	.87	3.05

*WROUGHT STEEL PIPE (Full standard weight) Discount from list; see footnote					
8½ to 6 in. Lap Weld†	Galv. %	4.25‡	+0.25‡	+0.25a	+1.25a
	Black %	18.50a	17.50‡	17.50ab	16.50a
2½ & 3 in. Butt Weld†	Galv. %	10.75	10.75	10.75	10.75
	Black %	14 25	13.00a	9 75	8 75
2½ & 3 in. Butt Weld†	Galv. %	10 75	10 75	10 75	14 25
	Black %	8 75	7 00ab	9 75	2 75b
2½ & 3 in. Butt Weld†	Galv. %	28.00	28 00	28 00	28 00
	Black %	26.00	26 00	28 00	28 00
Mill	Lorain, Ohio	.....	.....	27 00	26 00
	Aliquippa, Pa.	....	....	....	....
	Sparrows Pt., Md.	....	....	....	....
	Benwood, W. Va.	....	....	28 00	28 00
	Youngstown, O.	....	....	28 00	28 00
	Indiana Harbor, Ind.	....	....	27 00	28 00
	Sharon, Pa.	....	....	....	....
	Wheatland	....	....	....	....
	Etna, Pa.	....	....	....	....
	Fontana, Calif.	....	....	....	16 50j

†Threaded and coupled. ‡ 8½ to 6 in. a Continuous weld. b 8 and 9 in. d 10 lb.

*• Delivered. *a BEGINNING 8/4/55 PRICE INDEXES for CENTRIFUGAL CAST IRON PIPE (include carload freight allowed to city). These also serve as the HISTORICAL RECORD of THE $ PER NET TON PRICE of CLASS B, B&S, PIT CAST IRON PIPE. F.O.B. Foundry Price Indexes Birmingham, Ala., 109.3; Burlington, N. J., 118.1. Historical record for 20 cities January 1950 to date will be published in 1955 Cost Issue of ENR, Sept. 29, 1955. *b Extra strength ASTM C 200-44T *c 4-in., $90 *d SS361-A *e 30-in. *f 21 in. *g culvert pipe; reinforced, ASTM C 76-41 *h reinforced, ASTM C 75-41 *i reinforced, ASTM C 76-37 *j centrispun; no standard specs. in Canada *k 2% off for cash *l fob plant *m truck delivery *n LCL delivered, fob truck *o listed price based on LCL (no min.) *p freight allowed to destination in city *q ASTM C 13-40 *r CL fob origin, freight allowed *s 2 ft lengths *t 3 ft lengths *u CESA A 60-1941 specs. used *v standard strength *w sc; add 20% for d.s.

* WROUGHT STEEL PIPE: Deduct discounts shown above from the following standard list consumers carload prices to get mill price. List prices per ft.("based on approx. $200 per net ton): Butt Weld ⅛ in., 5½¢; ¼ in., 6¢; ⅜ in., 6¢; ½ in., 8½¢; ¾ in., 11½¢; 1 in., 17¢; 1¼ in., 23¢; 1½ in., 27½¢; 2 in., 37¢; 2½ in., 58½¢; 3 in., 76½¢. Lap Weld 3½ in., 92¢;4 in., $1.09; 5 in., $1.48; 6 in., $1.92. Add freight rates plus 3% transportation tax to get destination price.

WROUGHT IRON PIPE: List prices per ft. same as for wrought steelpipe, but add following „discounts" to get Pittsburgh mill price: Butt Weld—1 in. black, + 50.25, galv., + 78.50; 1¼ in. black, + 50.25, galv. + 78.0, 1½ in. black, + 46.75 galv. + 74.25; Lap Weld —2½ in. to 3 in. black + 52.50 galv. + 79.50; 4½ in. to 6 in. black + 49.50 galv. + 73.75 Add freight rates plus 3% transportation tax to get destination price.

LUMBER, TIMBER, PLYWOOD—PER M FT., B.M., CARLOAD LOTS F.O.B.

SHORT LEAF YELLOW PINE AND DOUGLAS FIR

All S. L. Y. P. is No. 2 common or better and for No. 1 N. C. Box. (Prices in Bold Face)
All Fir boards, dimensions, planks No. 2, Fir small timbers and timbers are No. 1. Lengths up to 20 ft.
(Prices in italics)

	1x6 s4s	1x8 s4s	2x4 s4s	2x6 s4s	2x8 s4s	2x10 s4s	3x12 Rgh	6x12 Rgh	12x12 Rgh	LONG LEAF Y. P. Merchantable grade up to 20 ft. 2x12 Rgh	12x12 Rgh	PLYWOOD Rail freight increment (See note for base price) ⅜"	¾"
Atlanta †‡	$78.00	$80.00	$73.50	$74.00	$77.50	$81.00	$79.00	.....	.....			$22.32	$27.24
Baltimore *	92.00	97.00	94.00	94.00	95.00	102.00	112.00	.....	.....	$170.00	$185.00	25.92	31.60
	132.00g	*132.00g*	*132.00g*	*132.00g*	*132.00g*	*132.00g*	*138.00g*	*$145.00*	*$145.00*				
Birmingham †	81.50	83.50	80.50	87.50	90.50	95.50	100.50	.....	.....	120.50	185.50	21.78	26.58
	105.00	*106.00*	*108.50*	*108.50*	*108.50*	*105.00*	*105.00*	*106.00*	*106.00*	.....	.....	.....	.....
Boston *	103/111a	112/118a	107.00a	107.00a	107.00a	107.00a	.....	.....	.....	.....	.....	25.92	31.60
	95.00n	*98.00n*	*124.00*	*124.00*	*124.00*	*124.00*	*129.00*	*129.00*	*129.00*	.....	.....	.....	.....
Chicago **	100.00	103.00	96.00	111.00	110.00	120.00	115.00	.....	.....	143.00	143.00	22.45	27.37
	107.00	*107.00*	*119.00*	*118.00*	*118.00*	*119.00*	*126.00*	*126.00*	*126.00*	.....	.....	.....	.....
Cincinnati *	93.75	94.75	83.00	90.50	94.75	103.00	110.50	.....	.....	131.75	131.75	25.00	30.48
	101.75	*104.00*	*113.50*	*110.00*	*112.25*	*112.50*	*138.00*	*138.00*	*138.00*	.....	.....	.....	.....
Cleveland **	96.00	98.00	103.00	102.00	102.00	103.00	.....	.....	.....	.....	.....	25.37	30.93
	.....	.....	*118.00*	*119.00*	*119.00*	*120.00*	*129.00*	*129.00*	*129.00*	.....	.....	.....	.....
Dallas k‡	72.00	76.00	68.50	68.50	73.50	65.50	130.00	.....	.....	127.50	134.50	18.72	23.80
Denver *	*Not in stock*		*121.50*	*122.50*	*122.50*	*122.50*	*125.00*	*137.75*	*140.50*	.....	.....	13.92	16.98
Detroit ‡	115.00	118.00	106.00	115.00	118.00	118.00	.....	.....	.....	.....	.....	25.00	30.48
	125.00	*125.00*	*134.00*	*130.00*	*130.00*	*130.00*	*175.00*	*175.00*	*165.00*	.....	.....	.....	.....
Kansas City *	130.00	130.00	125.00	130.00	135.00	145.00	.....	.....	.....	.....	.....	16.56	20.16
	135.00	*135.00*	*135.00*	*139.00*	*139.00*	*140.00*	*180.00*	*180.00*	*205.00*	.....	.....	.....	.....
Los Angeles i	*107.00*	*107.00*	*107.00*	*107.00*	*107.00*	*107.00*	*133.00*	*133.00*	*133.00*	.....	.....	16.61ab	20.25ab
Minneapolis #	*135.00*	*135.00*	*140.00*	*140.00*	*140.00*	*140.00*	*175.00*	*175.00*	*175.00*	.....	.....	19.89	24.25
Montreal ab	92.00	100.00	92.00	92.00	110.00	125.00	.....	.....	.....	165.00	165.00	.....	.....
	155.00	*155.00*	*155.00*	*155.00*	*155.00*	*155.00*	*130.00*	*130.00*	*130.00*	.....	.....	.....	.....
New Orleans †‡	100.00	100.00	92.50	85.00	90.00	94.00	118.50	.....	.....	150.00	148.00	18.72	22.80
†	*117.50*	*117.50*	*121.00*	*127.50*	*127.50*	*127.50*	*140.00*	*140.00*	*140.00*	.....	.....	.....	.....
New York *	112.50	115.50	125.00	127.50	127.50	127.50	167.50	.....	.....	250/270	250/270	25.92	31.60
	.....	.....	*127.50*	*127.50*	*127.50*	*127.50*	*165/175*	*170/180*	*170/180*	.....	.....	.....	.....
Philadelphia ‡			Range from $117.00 to $137.00			117/137	117/137	.....	.....	214/224	214/224	25.92	31.60
			Range from $131.00 to $165.00			*131/163*	*136/158*	*158.00*	*158.00*	.....	.....	.....	.....
Pittsburgh †			Range from $105.00 to $107.00				120.00	.....	.....	120.00	130.00	25.92	31.60
	125.00	*125.00*	*120.00*	*130.00*	*135.00*	*135.00*	*125.00*	*145.00*	*145.00*	.....	.....	.....	.....
St. Louis ‡	115.00	120.00	124.00	126.00d	136.00e	139.00e	.....	.....	.....	.....	.....	18.72	22.80
	.....	.....	*137.00i*	*138.00e*	*138.00e*	*142.00e*	*205.00e*	*205.00*	*205.00*	.....	.....	.....	.....
San Francisco A	*82.00*	*82.00*	*92.00*	*92.00*	*92.00*	*92.00*	*109.00*	*122.00*	*147.00*	.....	.....	12.22	14.91a
Seattle †	*80.00*	*80.00*	*80.00*	*80.00*	*80.00*	*80.00*	*86.00*	*86.00*	*96.00*	.....	.....	.....	.....
Toronto a	97.00	100.00	95.00	97.00	103.00	105.00	120.00	.....	.....	119.00	.....	.....	.....
	135.00	*120.00*	*122.00*	*130.00*	*130.00*	*130.00*	*155.00*	*140.00*	*140.00*	.....	.....	.....	.....

† F.o.b. mill. * F.o.b. city, CL, out of yard. ** F.o.b. city, CL, direct mill shipment.
‡ Deliv. to contr. CL. 1. Retail, LCL, at yard. # Retail, LCL, deliv. 2. Deliv. truck lots.
i. and.

LUMBER: Bold Face Type, Southern Pine. Italics, Douglas Fir. [a] Spruce. [b] Tax exempt. [c] 5M lots. [d] 8, 10, & 12 ft. lengths. [e] 8 to 16 ft. lengths. [g] No. 1 common. [j] 8ft. lengths. [k] No. 3 common. [n] 13. A incl rail rate from North west mills to San Francisco are $11.50 to $15.00 per M ft. bm. From Northern Calif. mills $9.00 by rail, $9.50 by truck. All rates for surfaced stock. For rough, add $3.00 to above figures.

PLYWOOD: Interior Fir Plywood, 4' by 8' panels, 5-ply, sanded 2 sides, water resistant glue, carload lots, delivered per 1,000 sq. ft. surface. Seattle base price on ⅜", $170.00; on ¾", $191.00. Exterior ⅜", $190.00, ¾", $212.00. For other centers add rail freight increment from table on proper size. Oiling and edge sealing charges included. [a] Lower rate by water shipment. [b] 50,000 lb. minimum.

GLASS, EXPLOSIVES, CHEMICALS

	WINDOW GLASS Discounts from Jobbers list, Feb. 1, 1938a Single or Double Thickness A quality	B quality	EXPLOSIVES Per lb. 40% Ammonia Gelatin in 50 lb. cases delivered in 200 lb. lots*
Atlanta	79%	80%	$0.2440
Baltimore	78%d	80%d	.2440
Birmingham	83%	83%	.1915
Boston	75–10%	75–10%	.2440
Chicago	74%	74%	.2440
Cincinnati	78%	78%	.2440
Cleveland	74–10–10%	74–10–10%	.2840
Dallas	78%	78%	.2515
Denver	77%	77%	.2490
Detroit	74–10–10%	74–10–10%	.2440
Kansas City	76–10%	76–10%	.2490
Los Angeles	78%	78%	.2465
Minneapolis	73–10%	73–10%	.2490
Montreal	40–10–5%bc	40–10–5%b	21.35k
New Orleans	75%	79%	.2490
New York	80 2½%	80–2½%	.4050x
Philadelphia	77%	79%	.2440
Pittsburgh	78%	78%	.2165
St. Louis	80–10%	80–10%	.2490
San Francisco	61%	69%	.2440
Seattle	73%	76%	.2465

Price of 60% Ammonia Gelatin is $0.15 per lb. higher than 40% in U.S.; $1.75 per 100 lbs. higher in Canada.

Glass: [a] Jobbers' list price per box, 14 x 20, ss, $42.75 for A quality, $37.50 for B quality; 14 x 20, ds, $66.00 for A quality, $52.75 for B-quality. [b] Discount from list, Apr. 1951; sales tax included, but 6% tax exemption not allowable for. [c] Single thickness. [d] Discount 8/15/52. [e] Discount eff. 12/31/54.

Explosives: * Cartridges of 1¼", 1½", 1¾", 2", 2¼", 2½", 3" diameters. Urban prices influenced by service charges or local storage and delivery regulations do not consistently reflect quantity prices in less congested areas. [g] In borough of Kings, Queens, and Richmond and in Manhattan south of Canal St., add delivery charge of $20.00 per trip. [h] F.o.b Beloeil (near Montreal), per 100 lb. forcite, 40% Forcite 60%, $23.10.

60% Ammonia Gelatin price ranges in other than urban areas, per lb.
(except Solamegraph Grades)

	C/L 20,000 lb. net	Tons	200 lb. lots
E. of the Miss., except Fla. and Me.	$0.184	$0.2165	$0.2365
W. of Miss. to Rocky Mtn. States, Fla. and Maine	.180 – .1965	.2215–.229	.2415–.249
Rocky Mtn. States	.189 – .2015	.2215–.229	.2415–.254
Pacific N. W. States	.1965–.199	.219 – 2315	.239 – .2515
Pacific S. W. States	.184 – .1915	.2165–.219	.2365–.2415

PILES, TIES F.O.B.

PILES

Prices per linear foot, fir and pine, bark off, f.o.b. cars, New York. Fir based on Wash. and Ore. points to New York shipping area; pine based on freight from Norfolk.

Dimensions	Points	Length	By Rail Pine*	By Rail Fir
12-in. at butt	6-in.	30 to 50-ft.	$0.51	....
12-in.—2-ft. from butt	6-in.	50 to 59-ft.	.54	....
12-in.—2-ft. from butt	6-in.	60 to 69-ft.	.58	....
12-in.—2-ft. from butt	6-in.	90 to 100-ft.	....	....
13-in.—3-ft. from butt	5-in.	91 to 100-ft.	....	....
14-in.—2-ft. from butt	6-in.	50 to 69-ft.	.50/.68	....
14-in.—2-ft. from butt	6-in.	70 to 79-ft.	.78/.88	.93
14-in.—2-ft. from butt	5-in.	80 to 85-ft.	.83/.93	.94
14-in.—2-ft. from butt	5-in.	85 to 89-ft.	....	1.00
14-in.—2-ft. from butt	5-in.	90 to 100-ft.	....	1.02

* Pine piling over 80-ft. available only in limited quantities.

RAILWAY TIES

Prices f.o.b. per tie for carload lots:

		6"x8"x8' Untr.	6"x8"x8' Tr.	7"x9"x9'6" Untr.	7"x9"x9'6" Tr.
Birmingham	Hardwood, Grade 3	$2.00a	$4.05a	Gr. 5$2.70	$5.05a
	Grade 2	1.80	3.90a	" 4 2.55	4.85a
	Grade 1	1.45	3.40a	" 3a2.10	4.50a
Chicago	Red Oak	....	3.20a	....	4.10/4.20a
New York	S. L. Sap Pine	2.00	4.00	3.00	5.00
	Mixed Oak	2.50	4.50	3.50	5.50
Philadelphia	Red Oak	2.95/3.70	4.50/5.75	3.58/3.90	5.50/5.75
St. Louis	White Oak	2.25	....	2.75	....
	Red Oak	2.15	2.70a	2.60	3.25a
	Sap Pine or Cypress	....	2.60a	....	3.30a
San Francisco	Douglas Fir	2.41ef	3.32ef	3.48bf	5.10cef

Tr.—Treated; Untr.—Untreated. [a] Creosoted. [b] 7"x9"x8'. [c] Empty cell. [e] Green [f] f.o.b. cars.

CHEMICALS

Water, sewage treatment, road work, f.o.b. carlots, New York

Bleaching powder in drums f.o.b. works, per 100 lb.	$5.02
Chlorine cylinders, liquid, per lb. f.o.n. works	.095
Calcium chloride, 77–80%, flaked, 100-lb. paper bag, f.o.b. works, ton	27.00
Silicate of soda, 52 deg., in drums, f.o.b. works, per 100 lb.	2.30
Soda ash, 58%, in paper bags, per 100 lb. dense	1.70
Sulphate of aluminum, commercial, in 100-lb. bags f.o.b. works	1.85
Sulphate of copper, in bags, 99% per 100 lb. f.o.b. works	10.35

MUELLER®

IMPROVED CURB BOX

Telescopic upper section prevents damage to stop, line or box from heavy loads . . . upper section held in any position by strong phosphor bronze spring . . . allows for grade changes, settlement or frost heave . . . cannot be pulled out of base . . . bronze-bushed lid assures easy removal of access plug at all times . . . curb box completely coated with tar base enamel . . . for stops in sizes from ½″ through 2″ . . . lengths from 2′ through 6′ . . . optional foot-piece centers stop and provides solid support for curb box.

INVERTED KEY CURB STOP

Tapered key individually ground and lapped for perfect pressure-tightness . . . key seated by base cap *and* water pressure . . . increase in water pressure automatically increases key-seating force . . . key is unseated for easy turning with downward pressure on shut-off rod . . . pressure instantly reseats key . . . combined cap and tee has accurate built-in check . . . all parts cast from finest waterworks bronze . . . various combinations of inlets and outlets for any type, or types, of service pipe . . . sizes from ½″ through 2″.

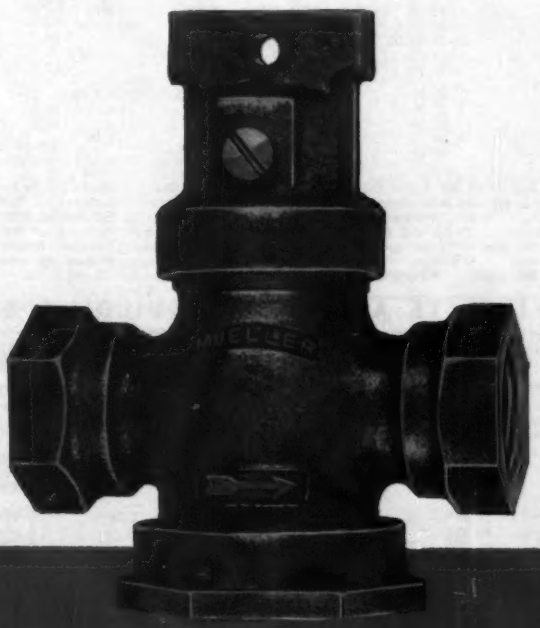

See your Mueller Representative, Catalog W-96 or write direct for detailed information on Mueller's full line of curb stops, curb boxes and related waterworks products.

MUELLER CO.

Dependable Since 1857

MAIN OFFICE & FACTORY DECATUR, ILLINOIS

STRUCTURAL CLAY BUILDING TILE, BRICK AND LIME—DELIVERED

	STRUCTURAL CLAY TILE PARTITION — SCORED Per M. lots of 2,000 pieces or over, 3x12x12 in.	4x12x12 in.	8x12x12 in.	STRUCTURAL CLAY TILE — LOAD BEARING — SCORED Per M. lots of 2,000 pieces or over, 8x12x12 in.	10x12x12 in.	12x12x12 in.	BRICK Per M. in quantity Common backing	Straight hard	LIME Per ton, in paper, Carload lot, Hydrated finishing	Common hydrated	Pulverized or lump
Atlanta	$128.65	$128.65	$256.00	$288.00	.....	.....	$25.50	$26.50	.....	.....	.....
Baltimore	202.00	216.00	404.00	458.00	594.00	679.00	36.00*k*	41.00*k*	33.00	21.50	.....
Birmingham	126.00*p*	142.00*p*	253.00*p*	284.00*p*	354.00	438.00	27.00*ff*	32.00*gg*	29.25	24.00	.....
Boston	196.00†	209.00†	392.00†	283.75†	.....	.....	36.85*p*	40.35*p*	30.00†	28.00†	.....
Chicago	135.00	145.00	280.00	.....	.....	.....	28.00	30.00	31.00	27.00	.....
Cincinnati	205.00*j*	215.00*j*	295.00*jdd*	.....	.....	.....	45.00*j*	46.00*j*	27.50*j*	27.50*j*	.....
Cleveland	187.50**	200.00**	.....	.....*w*	.....	.....	39.75	39.75	29.75	24.75	33.50*ee*
Dallas	.....	118.00	.....	.....	.....	.....	19.75	32.25	32.00	21.80	.....
Denver	.....	.....	.....	.....	.....	.....	34.00	41.00	34.80*bb*	28.00*bb*	34.00*bb*
Detroit	130.00	138.00	259.00	.....	315.00	360.00	39.00*cc*	40.00*cc*	36.00	32.00	.....
Kansas City	127.50	147.50	270.00	270.00	340.00	400.00	29.25	29.25	32.00	27.50	28.50
Los Angeles	*r*	*r*	*r*	*r*	*r*	*r*	27.50§	.....	34.00	34.00	35.00
Minneapolis	181.00*p*	201.00*p*	414.00*p*	201.00*pu*	.....	.....	41.00*p*	47.00	40.00*bbe*	30.00*bbfi*	42.00*bbds*
Montreal	165.00*aq*	181.00*au*	325.00*au*	230.00	248.00*u*	.....	39.50	46.00	39.20	22.00	13.75*u*
New Orleans	170.00	170.00	310.00	380.00	.....	.....	31.00	.....	.....	28.00	28.00
New York	151.90*h*	162.00*h*	222.70*eh*	245.40*hn*	.....	.....	41.00	.....	36.00	34.00	.....
Philadelphia	156.30	166.80	312.70	375.20	.....	.....	30/34	34/40	27.60	25.60	3.17
Pittsburgh	138.00	156.00	260.00	228.00	297.00	341.00	36.00	46.00*y*	25.00	23.00	2.97*m*
St. Louis	147.00*cc*	168.50*cc*	338.25*cc*	465.00*cc*	446.00	621.50	41.50*al*	43.00*a*	.95*aaa*	.75*aaa*	1.30*aaspee*
San Francisco	156.85*a**	177.10*a**	235.30*ddz**	.....	.....	.....	39.50	.....	26.60	26.60	28.25
Seattle	225.00*cc*	250.00*cc*	350.00	250.00*ccv*	.....	.....	42.00*a*	54.00*a*	42.00*aAA*	37.50	3.90*mAA*
Toronto	138.70	148.90	273.75	222.00*f*	.....	.....	41.50	59.00	40.50	33.50	29.00

*† F.o.b. yard Roxbury. *a Smooth. *b Per 50 lb. bags. *c 6 x 12 x 12 in.-3 cell. discount for cash. *t 8½ x 8 x 11¼. *u Tax exempt. *v Sand lime. *w 5 x 8 *d Pulverized hot. *e 8% 10th following month. *f 8 x 8 x 12. *g 5½ x 8 x 12. x 12. *y Stacked. *z Pebble lime price per 80 lb. sack. *aa Price per sack. Lime *h F.o.b. trucks, job site N.Y.C. *j Truck load or over. *k $1.00 discount. *l Red not sold per ton. *bb LCL. *cc Truck delivery. *dd 6 x 12 x 12. *ee Pebble face. *m Per bbl., 180 lb. *n 7½ x 7¾ x 12. Speed title. *p Truck lots. *q Pre- lime. *ff 80% common. *gg Select. *hh Incl. § F.o.b. yard. *** Warehouse vincial and Municipal tax extra. *r Not used because of earthquake danger. *s 2% delivery. ** F.o.b. Stockton.

PAINT, ROOFING—F.O.B. CARLOAD LOTS

	RED LEAD Per 100 lb. in 600-lb. (Approx.) bbl. Dry *a*	WHITE LEAD Per 100 lb. in 100 lb. cases In oil *w*	READY-MIXED PAINT Per gal., drums Graphite *b*	Aluminum *c*	Ferric Oxide *d*	ROOFING SUPPLIES; Carload lots f.o.b. factory Rolls, slate surfaced, 85–90 lb. per sq.	Asphalt felt, per 100 lb.	Tar felt, per 100 lb.	Asphalt coating per gal.	Tar pitch 360 lb. bbl. per ton
Atlanta	$17.75	$28.275	$3.26	$3.51	$3.01	$3.10	$2.91	$2.91	$0.60	$55.00
Baltimore	17.50	27.90	2.75	4.25	3.35	2.42	3.73	3.73	.44	48.32
Birmingham	17.75	28.275	3.90	5.40	....	2.78	2.55	2.55	.75*ff*	33.50*ee*
Boston	17.50	27.90	....	....	....	3 13*g q*	2.97*eq*	2.97*eq*	.42*q*	50.50*q*
Chicago	17.50	27.90	....	....	....	3.17‡*u*	3.02‡*o*	3.02‡*o*	42.00‡*br*	50.00‡
Cincinnati	17.50	27.90	....	....	....	2.88	2.60	2.60	.55*y*	49.36
Cleveland	17.50	27.90	2.24*pgg*	2.47*gg*	2.61*gg*	2.88*q*	2.60*o*	2.60*o*	43*y*	42.70*kk*
Dallas	17.75	28.65	....	4.05	....	3.50*q*	3.75*o*	4.35*o*	.36	58.50*k*
Denver	18.00	28.40	3.29	5.15	3.04	2.78	2.55*o*	2.55*o*	.43*ff*	45.00
Detroit	17.50	27.90	2.35	3.25	2.50	2.88	2.60*f*	2.60*f*	.55	46.00
Kansas City	17.50	28.65	3.50	3.00*gz*	2.65	2.78	2.58*o*	2.58*o*	.42	61.95
Los Angeles	17.50	28.15	3.30*n*	4.50*n*	4.20*n*	3.10*n*	2.25*en*	*l*	.64*ny*	*l*
Minneapolis	17.50	29.88/28.02	....	....	....	2.88*dd*	2.60*hidd*	2.60*hidd*	.48*dd*	44.00*
Montreal	.....	21.95	2.95*Dff*	4.05*Eff*	3.25*Fff*	4.05*t*	3.60*t*	3.60*t*	1.00*tt*	3.60*t*
New York	17.50	27.90	....	....	....	2.88*G*	2.60*Go*	2.60*Go*	.48*Gs*	44.00*
Philadelphia	17.50	27.90	3.60	3 40/3.65	3.50/4.60	2.54	2.94	2.94	.37	26.00
Pittsburgh	17.50	27.90	2.68	2.85	3.15	2.75	2.60*o*	2.60*o*	.38	49.00
St. Louis	17.50	27.90	....	....	....	2.63	2.55*h*	2.55*h*	.42*y*	51.21
San Francisco	17.50	28.15	2.40	....	3.40	2.79	4.00*aa*	....	.43	....
Seattle	17.50	28.40	3.07*mcc*	2.93*mcc*	....	3.45*mcc*	2.91*hmcc*	....	.59*mcc*	52.00*mcc*
Toronto	.....	.....	....	....	....	4.00	3.65	....	1.45	85.00

*‡ Delivered. * Note: Red lead in oil 50¢ higher than white lead in oil. *a Red lead prices change frequently due to pig lead price changes. *b U. S. War Dept. Spec. 3-49A. *c ASTM Spec. D266-31. *d 80% minimum ferric oxide. *e 15 lb. *f Per 432 sq. ft. *g F.o.b. yard, Roxbury. *h Per roll, 65 lb. *i Net carload lot prices; Minneapolis and vicinity. *k Per cwt. *l Not used. *m 1% discount for cash. *n F.o.b. city. *o Per 60-lb. roll. *p 6-drum. 50 gal. ea. *q Per 90-lb. roll* *r F.o.b. factory, Chicago. *s 466 Med. *t Federal tax included. *u Per 90-lb. square. *v Per ton. *w Price to large paint contractors is $1.25 less. *x Mineral surfaced. *y 55-gallon container. *z Drums. *aa Approximate cost per 100 lbs *bb Roofers coating and cement; Price per ton. *cc LCL, truck delivery. *dd 2% cash discount. *ee Asphalt pitch in 100 lb. package. *ff 5-gal. drums. *gg F.o.b. factory *hh Incl. freight. *D Std. Black. *E Ready-mixed. *F Over 80% ferric oxide ** Aver. wt. approx. 425 to 550 lbs. drums. *G Freight absorbed to destination not over .35 cwt.

PLASTER, VERMICULITE AND METAL BUILDING SHEETS & TUBING

	PLASTER† Neat per ton	Gauging per ton	VERMICULITE† Home Insulation pellets	Plaster aggregate	Concrete AGGREGATE‡ Treated	Untreated	ALUMINUM SHEET^ Flat, .102" th 36"x96" & 48"x144" per lb‡	Corr roof .032" th 35"x12' per sh‡	STAINLESS STEEL SHEET*-TYPE 302*g* 20 ga 48"x96–120" per cwt‡‡	28 ga 36"x120" per cwt‡‡	COPPER WATER TUBING-TYPE L 2000 ft lots per ft‡ ¾"*b*	½"*c*
			per bag of 4 cu ft									
Atlanta	$29.00	$36.00	$1.45	$1.35	$1.50	....	$0.359*n*	$7.067*n*	$53.68	$61.18	$14.49*f*	$20.29*f*
Baltimore	21.50	32.00	0.95	1.15	....	$1.15	0.391	0.427*r*	56.25	64.25	0.1518	0.2129
Birmingham	36.00	43.00	1.55	1.55	1.75	....	0.414	8.392	55.68	65.68	0.1727	0.2430
Boston	19.90	.....	1.15	1.18	....	1.30	0.44*q*	36.15*op*	55.81*dd*	61.85*ddff*	0.1704	0.2395
Chicago	24.60	24.60	1.45	1.50	1.50/1.60	....	0.418*o*	8.574*fp***	57.55*fee*	65.55*fee*	0.1588	0.2230
Cincinnati	21.60*o	21.60*o	1.75	1.75	1.85	1.75	0.445	8.34	57.60	69.30*ff*	0.1726	0.2430
Cleveland	26.00	40.00	1.25	1.32	1.40	....	0.369*aa*	7.569	58.25	63.25	20.63*f*	25.86*f*
Dallas	29.80	31.80	1.20	1.25	1.30	....	0.379	0.439*r*	55.00	63.00	0.1449	0.2029
Denver	24.00	24.00	1.40	1.30	....	1.50	0.399	8.339	61.25*gg*	62.57*gg*	0.1588	0.2230
Detroit	24.00	24.00	1.32	1.33	1.42	1.42	0.397	8.78	57.55	75.55	20.00*foo*	27.87*f*
Kansas City	30.00	35.00	1.20	1.30	1.40	....	0.416	9.94	60.72*ee*	68.72*ee*	22.52*f*	27.62*f*
Los Angeles	25.00	26.00	1.25*ii*	1.20*ii*	1.45*ii*	1.25*ii*	0.427	9.07	69.35	87.10	0.1588	0.2230
Minneapolis	31.00	31.00	1.30	1.60	....	1.80	0.425	7.68	58.26	71.01*ff*	0.1638*d*	0.2305*d*
Montreal	28.80	33.20	1.00	1.30	1.35	1.30	0.372	8.25	54.00	.....	0.29	0.350
New Orleans	35.00	37.00	1.50	1.20	1.25	1.25	0.359	0.366*aabb*	56.68	64.18	0.1449	0.2029
New York	23.00	29.00	1.25	1.20	1.40	1.30	0.42*foo*	8.50*f*	58.47	66.47	19.68*f*	27.60*f*
Philadelphia	23.25	32.00	1.35	1.35	1.35	1.40	26.50*fuz*	7.55*f*	53.23*f*	60.98*f*	14.49*f*	20.29*f*
Pittsburgh	25.00	29.00	1.25	1.25	1.30	1.25	0.42	9.19	56.81	62.63	0.1518	0.2129
St. Louis	30.00	37.00	1.25	1.50*jj*	1.60*jj*	1.50	0.45*io*	8.89*e*	56.64*kk*	75.64*kk*	15.88*fm*	22.30*fm*
San Francisco	24.00	26.00	1.05	1.03	....	1.24	0.416	8.14*cc*	71.85	.....	0.1681	0.2363
Seattle	33.00	36.50	1.45	1.25*k*	1.65	....	0.369	7.569	64.75*ee*	72.75*ee*	0.1449	0.2029
Toronto	32.50	40.00	1.20	1.45	1.45	1.35	0.38	20.55	56.00	88.00	0.2684*pp*	0.3374*pp*

† truckiots, delivered * carload ‡ delivered *a fob city *b ½" O.D. *c ⅝" O.D. *d 10M ft & over *e 2-10M ft; 10M ft & up: $0.1925/ft *f per 100 ft *g 5 tons & up; cold roll, anneal & pickled; 2B finish *h 15M lb *i 3003 alloy; 1100 alloy: $0.456/lb *j 1100 & 3003 alloy, mill finish *k per bag of 3 cu ft *l treated has air entraining agent; untreated does not *m 2-10M ft *n fob plant, fr allow *o 5M lb & up *p 100 sq ft quantity *q 2M lb quantity *r per lb *t 36" x 96;- 10.81 lb/sh; 48" x 144":21.7 lb/sh *u 19.31 lb/sh *v in 4M-lb skids; $0.296/lb in 1M-lb cases *w 48" x 144" *x 36" x 96" $13.25/sh *aa 16M lb & up *bb fob mill *cc 20' x 6-12' *dd add $0.75/cwt for boxing *ee 4 tons & up *ff 26 ga *gg add $2/cwt boxing; $0.75/cwt on skids *hh Theoretical wt for 48" x 96": 50.4-lb, per sh. *ii 300-bag lots *jj per 100-lb bag *kk mill shipment; add $2 per cwt for immediate del *mm Theoretical wt: 19.7-lb per sh *nn Deliv, warehouse means *oo ¼" O.D. *pp Incl 10% sales tax *** 6% incr. expected within the month

BUILDING BOARD & LATH AND INSULATION—DELIVERED TRUCKLOAD LOTS

	GYPSUM PLASTER BOARD tapered edge per Msq ft ½"	¾"	GYPSUM BOARD LATH plain or perf per Msq ft ⅜" x 16" x 48"	GYPSUM SHEATHING tongue & groove per Msq ft ½" x 2' x 8'	FIBER BOARD SHEATHING asph impreg & coat per Msq ft ½" sq ed	¾" T&G	FIBER BOARD INSULATION sq edge, paint per Msq ft ½"	MINERAL WOOL INSULATION† loose, per 40-lb bag a	3" batts per M sf	GLASS FIBER INSULATION† loose, per 40-lb bag a	3" batts per M sf	ALUMINUM FOIL 60¢ Kraft 1 side foil per roll of 250 s. f.	Expansible Blanket 2 layers foil per Msq.ft.
Atlanta	....	$65.00	$45.00	$75.00	$75.00	.....	$75.00	$1.08	$75.00	$1.45*b*	$85.00	.....	.....
Baltimore	$49.25*f*	43.50*f*	31.30*f*	53.00*f*	65.00*f*	108.50*f*	69.00*f*	1.30	66.50	1.60	45.00	$4.00*g*	$33.50
Birmingham	67.00	56.00	46.75	75.00	73.50	124.00	72.50	1.32	70.00	1.60	75.00	3.87*g*	.....
Boston	46.50*m*	41.00*m*	31.50*m*	48.00*m*	64.00*m*	109.00*m*	79.00*An*	1.45	75.00	1.40	56.00	5.80	54.50
Chicago	67.00	50.00	41.00	57.00	80.00	117.00	76.00	1.60	84.00	....	62.00*bb*	5.25	....
Cincinnati	46.40*w*	41.60*w*	30.80*w*	45.81*w*	65.00*w*	110.00*w*	65.00*w*	.....	61.00	1.25	75.00	3.31	45.50*w*
Cleveland	60.00	60.00	40.00	60.00	70.00	111.00	70.00	1.35/1.50	75.00	2.20	82.00	7.76*dj*	.....
Dallas	55.00	52.50	40.00	62.50	73.50	122.50	70.00	1.90	65.00	1.35	65.83	4.25	.....
Denver	60.00	52.50	40.00	60.00	72.90	123.00	71.90	....	71.00*i*	1.30	50.00	11.00*r*	21.00
Detroit	55.00	48.50	35.75	54.00	56.50	95.00	56.00	....	.....	1.95*b*	73.00	....	.....
Kansas City	65.00	55.00	40.00	65.00	72.00	120.00	75.00	1.40	80.00	1.40	80.00	15.45*dt*	25.75
Los Angeles	57.50	50.00	0.31*x*	57.50	71.87	121.25	80.00	....	83.00	1.35*	64.00	17.00*o*	25.40
Minneapolis	72.00	63.00	0.40*x*	65.00	70.00	114.00	70.00	1.30	78.00	1.30	78.00	6.50	.....
Montreal	60.00	52.00	39.00	53.00	60.00	.....	62.00	1.00	62.00	1.00	62.00	20.00*o*	50.00
New Orleans	65.00	50.00	45.00	65.00	65.00	100/115	70.00	1.95	79.00	....	.....	15.66*u*	.....
New York	50.00	44.50	34.00	51.00	67.00	108.00	66.00	1.55	69.00	1.90	72.00*l*	5.20	48.80*cc*
Philadelphia	50.00	48.00	34.00	48.50	67.50	105.00	49.20	....	63/70	....	70/75	5.50/6	34.50/44.50
Pittsburgh	68.00	57.00	42.50	70.00	70.00	108.00	65.00	1.80	70.00	1.80	70.00	4.10	.....
St. Louis	58.00	52.50	39.00	58.50	65/72.50	115/120	75.00	1.70	80.00	1.30	69.00	5.50	.....
San Francisco	49.00*c*	42.75	0.33*x*	53.00*k*	58.00	94.00	56.00	1.60	66.50	1.55	66.50	4.82*l*	52.50
Seattle	57.50	50.50	40.00	59.00	71.40	120.35	70.20	1.50*y*	81.00	1.65*z*	62.00*aa*	4.25*g*	.....
Toronto	61.00	50.00	40.00	64.50	75.00	.....	0.90	47.00	.....	....	51.00	21.50*o*	67.50

*a for hand packing *b per 30# bag *c carloads *d 40# kraft paper *f full trailer loads *g 80# kraft paper backing *h LCL *i flameproof $75.00 *j 133 lin ft; per 100 roll *k plain core; asph core $56/M sq ft *l 2-in: $52/M sq ft *m 10 ton quantities *n distributor's siding *o per Msf roll *p per sf *r per cwt *s per 35# bag *t per M sq ft *u honeycomb, 1¼-in *w fob city *x per sq. yd. *y 20# bag *z 32# bag *aa fob warehouse *bb 2' *cc in 250 sf rolls, of 16", 20", or 24" width.

SKILLED AND COMMON WAGE RATES—PER HOUR

	Bricklayers	Carpenters	Struct. Iron Workers	Hoisting Engineers	Plasterers	Electrical Workers	Steamfitters	Common Labor Building	Common Labor Heavy Const.
Atlanta	$3.25	$2.60	$2.95	$2.70	$2.875	$3.00	$3.15*d*	$1.38	$1.38
Baltimore	3.20*d*	2.75	3.325*t*	2.55/2.70*Q*	3.075*t*	3.075	3.075*t*	1.675*t*	1.675*t*
Birmingham	3.25	2.60	2.925*k*	2.32	2.72	3.075*k*	3.125*k*	1.375	1.475
Boston	3.35*e*	2.925*k*	3.475*k*	3.40	3.45*l*	3.13*R*	3.20*d*	2.22*Y*	2.22*Y*
Chicago	3.55*k*	3.30*r*	3.50*k*	3.15*m*	3.625*y*	3.53*f*	3.44	2.50*k*	2.50*k*
Cincinnati	3.40	3.15	3.275*k*	2.925/3.175	3.225	3.28*N*	3.445*Z*	2.20	2.10
Cleveland	3.45*k*	3.40	3.40*k*	3.40	3.40	3.425	3.40*d*	2.65	2.65
Dallas	3.625	2.875	2.95	2.875	3.437	3.00	3.185*bb*	1.50	1.50
Denver	3.50	2.975	2.925*t*	2.83	3.375*t*	3.00	3.20*D*	1.925	1.925
Detroit	3.58*ee*	3.324*q*	3.475*P*	3.30*ee*	3.49*vl*	3.62*H*	3.37*k*	2.55*ez*	2.55*ez*
Kansas City	3.625	2.85	3.00	3.045	3.325	3.18*O*	3.225*k*	2.105	2.13
Los Angeles	3.60	2.96*daa*	3.325*t*	2.79*d*	3.75*S*	3.25	3.44*d*	2.23*daa*	2.23*daa*
Minneapolis	3.325	2.90	3.07	2.85	3.13*Gv*	3.29*n*	3.075*d*	2.15	2.15
New Orleans	3.175	2.60	2.975*m*	2.85*m*	2.85*m*	3.10*k*	3.10*v*	1.475	1.475
New York	4.15*br*	3.73*bJ*	4.075*p*	3.99*J*	4.35*A*	3.66*aF*	3.978*bL*	2.592*V*	2.592*V*
Philadelphia	3.92*s*	3.30	3.63*jM*	3.07/3.82*s*	3.65*C*	3.80*uv*	3.615*q*	2.025	2.325
Pittsburgh	3.625*k*	3.275*k*	3.35*k*	3.425*k*	3.375*k*	3.50	3.375*k*	2.175*k*	2.08*d*
St. Louis	3.625*c*	3.225*A*	3.225*k*	3.225	3.30*k*	3.60*c*	3.50*E*	2.275*k*	2.275*k*
San Francisco	3.75*e*	3.16*e*	3.35*	2.96*r*	3.66*	3.35*U*	3.56*K*	2.275*e*	2.275*e*
Seattle	3.50*d*	2.76*d*	3.07*d*	3.00*d*	3.25*d*	3.135*X*	3.31*T*	2.35*d*	2.35*d*
Montreal *†	2.00	1.80	1.90	1.70	2.05	2.00	2.10	1.25	1.25
Toronto**	2.558	2.392	2.39	2.45	2.496	2.60	2.444	1.35	1.35

* Cost of living bonus now included in basic wage. † Plus 8% fringe benefits ** Incl. 4% vacation fund. *a 8 hr. day. *b 7 hr. day. *c Incl. 3% vac. stamp fund plus 7½¢ WF for bricklayers; 4% VF for electricians plus 8¢ WF, 1% PF. *d Incl. 10¢ H&WF. *e Incl. 10¢ VF. *f Incl. 6% WF. *g Incl. 11½¢ WF. *h $2.725 homes & housings plus 7½¢ WF. *i Incl. 17¢ WF. *j Incl. 10½¢ hr. WF. *k Incl. 7½¢ hr. WF. *l Incl. 4% VF *m Incl. 5¢ hr. WF. *n Incl. 8¢ H&WF, 6% VF, 1% PF. *o Incl. 10¢ PF. 7¢ WF. *p Incl. 3% WF, 3% PF. *q Incl. 10¢ ins; 4% vac. and holiday pay. *r Incl. 4% WF and 20¢ PF. *s Incl. 5% W&PF, 4% VF, 1% NC, 6 PH. *t Incl. 7½¢ H&WF. *u Incl. 1½% PF. *v Incl. 10¢ WF. *w Negotiating. *x 5¢ VP. *y Incl. 22½¢ WF. *z Incl. 7½¢ IF, 5¢ H&WF. *A Incl. 15¢ WF, 15¢ PF, 20¢ B.F. *B Incl. 3% WF. *C Incl. 15¢ WF. *D Incl. 10¢ H& WF, 5¢ organ. *E Incl. 6% WF, plus travel pay per day. *F Plus $4 per day Annuity contrib. *G Incl. 3¢ Prom. *H Incl. 7¢ WF, 6% VF. *I Incl. 15¢ H&WF, 5¢ for Advtg. *J Incl. 5% WF, 6 PH. *K Incl. 11¢ WF, 12½¢ VF, 10¢ PF. *L Incl. 3% WF, 3% PF, 2% VF, 1% EF. *M Incl. 7½¢ PF. *N Incl. 1% WF. *O Incl. 10¢ WF, 1% PF. *P Incl. 10¢ hosp. ins.; 5¢ vac. * Q drum, 2 drums $ 3.25/3.40. R Incl. 12¢ WF and 4¢ apprentice. *S Incl. 12½¢ H and WF. *T Incl. 21¢ H, W & VF. *U Incl. 7½¢ WF, 4% VF. *V Incl. 8% WF, 3% PF. *W Incl. 2% F. *X Incl. 6¢ VF, & 7½¢ H & WF. *Y Incl. 7¢ H & WF. *Z Incl. 9½¢ WF. *aa Plus 4¢ eff 9/15. *bb Incl 8¢ WF.

MEXICO CITY PRICES

In Pesos, F.o.b. City		June '55	July '55
Common Wages—Building (8 hr. day) (Peons)	av. per hr.	1.19	1.19
Common Wages—Heavy Const. (8 hr. day) (Peons)	av. per hr.	1.19	1.19
Skilled Labor Wages			
Carpenters (8 hr. day) 1 cl.	av. per hr.	2.25	2.25
Bricklayers (8 hr. day) 1 cl.	av. per hr.	2.25	2.25
Struct. Iron Workers (8 hr. day) Remachadores.	av. per hr.	1.37*	1.37*
Struct. Steel Shapes 3"–15" x 12 meters	per metric ton	1400.00	1400.00
Reinf. Steel, Corr. Rods			
¼" x 11 meters	per ton	1400.00	1400.00
⅜" x 11 meters	per ton	1400.00	1400.00
½" x 11 meters	per ton	1400.00	1400.00
⅝" x 11 meters	per ton	1400.00	1400.00
¾" x 11 meters	per ton	1400.00	1400.00
1" x 11 meters	per ton	1400.00	1400.00
Gravel truck load of 3½ cu. meters			
Blue Gravel	per tr. load	70.00	70.00
Rose Gravel	per tr. load	65.00	65.00
Cement, Std. Port. (Tolteca)	per ton	185.00	185.00
Lumber			
3rd Class Pine	per M ft.	1400.00	1400.00
1st Class Pine	per M ft.	2000.00	2000.00
2nd Class Pine	per M ft.	1800.00	1800.00

* 1st & 2nd floors. Aver rate 4.38

ENR Skilled Average (Bricklayers, Carpenters Iron workers): $3.273. **ENR Common Average** $2.087

EQUIPMENT OPERATOR WAGE RATES

	Truck drivers 1½ T	—4 cy Dump	+4 cy	Tractor Operators incl bulldozers 34–49 hp	70–100 hp	100 & over	Tractor scraper 15–16 cy	Power cranes & shovels ½ cy	¾ cy	Motor grader oper	Air comp oper	Air tool oper
Atlanta	$1.50*pp*	.....	.....	$2.425	$2.425	$2.425	$2.425	$2.95	$2.95	$2.425	$2.20	$1.60
Baltimore	1.675*	1.825*u*	1.925*	2.85/3.00*b*	2.85/3.00*b*	2.85/3.00*b*	285/3.00*b*	3.25/3.40*b*	3.25/3.40*b*	2.85/3.00*b*	2.85/3.00*b*	2.25
Birmingham	1.59	1.85*ff*	1.92*gg*	2.46	2.46	2.46	2.60	2.60	2.60	2.46	2.185	1.525
Boston	1.945*c*	.....	.....	3.025*d*	3.025*d*	3.025*d*	3.025*d*	3.40	3.40	3.40	2.355	2.22*e*
Chicago	2.12*fii*	.....	.....	2.90*ag*	3.05*ah*	3.10*ai*	2.90*a*	3.50*a*	3.50*a*	3.00*a*	3.00*a*	....
Cincinnati	2.10*j*	2.20*j*	2.30*j*	2.925	2.925	2.25	2.925	3.175	3.175	3.175	3.175	3.175
Cleveland	2.42*m*	2.42*m*	2.42*m*	3.15	3.15	3.15	3.15	3.40	3.40	3.15*k*	3.025*b*	3.025
Dallas	1.50	1.50	1.50	1.50/2.625*l*	1.50/2.625*l*	1.50/2.625*l*	1.50/2.625*l*	1.50/2.625*l*	1.60/2.625*l*	1.60/2.625*l*	1.50/2.00*l*	1.50/1.55*l*
Denver	2.05	2.05	2.15	2.66	2.66	2.66	2.66	2.83	2.83	2.66	2.66	2.275
Detroit	2.35**	2.35**	2.35**	3.30*m*	3.30*m*	3.30*m*	3.30*m*	3.30*m*	3.30*m*	3.30*m*	3.025*m*	2.68*m*
Kansas City	2.065*n*	2.065*o*	2.14*p*	2.25	2.80*q*	2.80*q*	2.80*r*	3.045	3.045	2.66	2.80*t*	2.19
Los Angeles	2.34*uuuu*	2.34*uuuu*	2.37*uuuu*	2.87*m*	2.87*m*	2.87*m*	3.28*m*	3.10*m*	3.10*m*	3.01*m*	2.59*m*	2.445*uuuu*
Minneapolis	2.15	2.15*v*	2.30*w*	2.53	2.75*q*	2.97*z*	2.75	2.97*y*	3.23*z*	2.53	2.42	2.25
New Orleans	1.575	1.575	1.575	2.80	2.80	2.80	2.80	2.80	2.80	2.80	2.15	1.575
New York	2.12½*aa*	2.52*bb*	2.52*bb*	3.33*cc*	3.33*cc*	3.33*cc*	3.465*cc*	4.25*cc*	4.25*cc*	3.465*cc*	3.465*cc*	2.94*cc*
Philadelphia	1.825/2.025*u*	1.825/2.025*u*	1.825/2.025*u*	3.07/3.82*m*	3.07/3.82*m*	3.07/3.82*m*	3.07/3.82*m*	3.07/3.82*m*	3.07/3.82*m*	3.07/3.82*m*	2.89*m*	2.05*m*
Pittsburgh	2.275*u*	2.275*u*	2.275*u*	2.95*u*	3.275*u*	3.325*u*	3.325*u*	3.425*u*	3.425*u*	3.325*u*	3.325*u*	2.275*u*
St. Louis	2.275*uuu*	.....	.....	3.225*kk*	3.225*kk*	3.225*kk*	3.225*kk*	3.225*kk*	3.225*kk*	3.225*kk*	2.675*kk*	2.2675*kk*
San Francisco	2.30*u*	2.30*u*	2.315*u*	3.07*m*	3.07*m*	3.07*m*	3.07*m*	3.40*m*	3.40*m*	3.23*m*	2.68*m*	2.40*m*
Seattle	2.60*nu*	2.60*ndd*	2.80*nee*	2.75*m*	2.95*m*	2.95*m*	2.95*m*	3.30	3.30*m*	3.05*m*	2.75*m*	2.62*m*
Montreal ‖	1.25	1.25	1.25	1.63	1.63	1.63	1.63	1.89	1.89	1.63	1.70	1.50
Toronto	1.51*ii*	1.51*ii*	1.72*ii*	1.98*ii*	1.98*ii*	1.98*ii*	1.98*ii*	2.45*ii*	2.45*ii*	....	2.13*ii*	2.13*ii*

*a Incl 5¢/hr HWF *b lower rates, straight time, other broken *c 2-axle; 10-wheel $2.00; Euclid $2.20 *d Intermediate *e bldg constr; highway $2.145 *f less than 2-t *g blade *h scoop, bldg *i scoop, road *j plus $2 pd by employer for hosp. death benefits to family *k bldg constr; steel constr $3.40 *l higher rates are union, other taken from min wage scale approved by County Commissioners Court *m incl 10¢ H&WF *n flatbed *o under 10 cy *p over 10 cy *q over 50 hp *r blade grader *s form and subgrade *t single *u incl 7½¢ HWF *v up to 6 cy *w 6–8 cy *x cat oper *y up to 3½ cy *z 3½ cy & over *aa plus approx $5.30 per wk W&PF *bb incl 3% WF, 2% PF, 11 PH *cc incl 5% WF *dd up to 5 cy *ee 5 cy & over *ff over 1½ T but not incl 3 *gg over 3 but not incl 5 tons *hh excavating *ii incl 4% VP *jj includes 12¢ H, W & PF *kk 7½¢ WF included in base pay *ll Plus 8% fringe benefits *mm +4¢ eff 9/15 *nn 8 cy or less; 8–16 cy $2.675; 16–25 cy $3.125 *oo Plus $2.25/wk WF *pp 2–5 T $1.70.

SEPTEMBER CONSTRUCTION SCOREBOARD



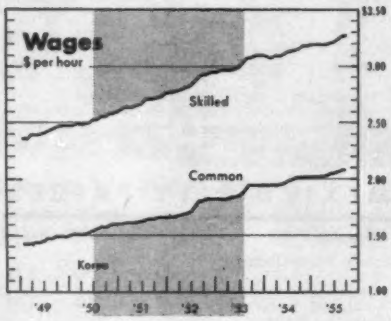





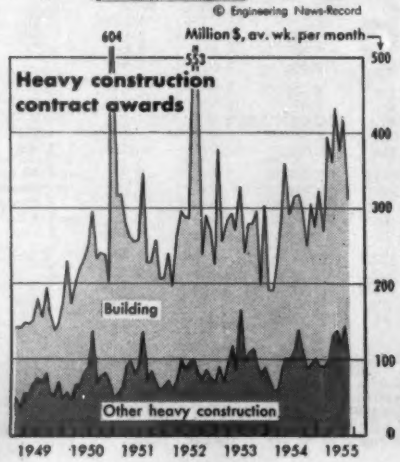

ENR INDEXES (1913 = 100), 20-cities' average	1955 Sept.	% Change from last Month	% Change from last Year
Construction Cost	672.80	+0.1	+5.1
Building Cost	479.21	+0.2	+5.5
WAGE RATES, 20-cities' average			
Common	$2.087	0.0	+3.7
Skilled (aver. 3 trades)	3.271	+0.3	+3.3
Bricklayers	3.522	0.0	+2.1
Structural Ironworkers	3.263	+0.5	+4.2
Carpenters	3.028	+0.2	+3.5
MATERIAL PRICES, 20-cities' average			
Cement, bulk, per bbl	$3.567	+0.3	+3.2
Structural Steel, (3-mill aver.), per cwt	4.600	0.0	+8.2
Sand, per ton	2.372	+0.4	+5.4
Lumber, 2x4 Fir, per M. ft. bm	121.388	+0.5	+7.4
Lumber, 2x4 Pine, per M. ft. bm	100.466	+0.4	+8.8
Common brick, per M	34.580	+0.1	+4.0
Ready-mixed concrete, per c. y.	12.601	+0.5	+3.3
Structural Clay Tile, 3x12x12 per M	162.571	+0.1	+0.4

CONTRACTS AWARDED (Millions)	1955 Aug.	1955 8-Months	% Change from '54 Aug.	% Change from '54 8-Months
Total U. S. (ENR reported)	$1,239.7	$12,348.0	−2.5	+32.1
Private	741.7	7,673.7	−6.4	+43.2
Public	498.0	4,674.3	+4.1	+17.1
Federal	61.3	1,166.7	−9.1	+44.4
ENR Volume Index, '13 = 100	508	611	−3.2	+26.8
NEW CAPITAL (Millions)				
Total	3,401.7	9,448.4	+148.0	+10.6
State & Municipal Bond Sales	249.7	2,837.5	+ 2.8	−22.4
Corporate Security Sales	131.3	2,204.9	0.0	+ 8.7
Federal (non-federal work)	119.4	941.7	+161.8	+25.3
Federal (federal work)	2,901.3	3,464.3	+204.7	+64.5

MATERIAL SHIPMENTS & LABOR SUPPLIES (millions)	1955 June (J) July (Ju)	6-Mos. 7-Mos.	% Change from '54 Mo.	% Change from '54 Yr.-Cum.
Cement, bbls. Bu. of Mines	31.260(J)	135.149(6)	+ 9.2	+10.6
Fabr. Struc. Steel, tons AISC	.218(Ju)	1.632(7)	−17.7	−13.5
Lumber, mil. ft. bm., NLMA	3.735(J)	19.966(6)	+14.4	+ 7.8
Lumber Prod., mil. ft. bm., NLMA	3.581(J)	19.391(6)	+14.6	+ 3.3
Contract Const. Employ., BLS	2.694(Ju)	2.414(7)†	+ 0.3	− 1.8

†Average

ENR CONSTRUCTION & BUILDING COST INDEXES IN 21 CITIES (1913 = 100)

	Construction Cost Sept. '55	Construction Cost June '55	Building Cost Sept. '55	Building Cost June '55		Construction Cost Sept. '55	Construction Cost June '55	Building Cost Sept. '55	Building Cost June '55
Atlanta	492	472	417	399	Los Angeles	705	672	483	457
Baltimore	595	575	472	452	Minneapolis	720	711	502	493
Birmingham	519	511	434	423	Montreal	532	525	412	405
Boston	709	696	488	471	New Orleans	547	535	451	439
Chicago	752	741	488	477	New York	794	750	548	533
Cincinnati	673	664	467	456	Philadelphia	721	711	533	523
Cleveland	785	762	489	477	Pittsburgh	690	669	498	489
Dallas	507	488	422	406	St. Louis	728	720	503	495
Denver	656	637	485	474	San Francisco	690	676	469	445
Detroit	776	763	503	490	Seattle	693	681	436	418
Kansas City	703	686	496	479	Toronto	552	543	449	449

August Contract Awards: The Pace Eases Up

Declines in private and federal work pull down the total 26% below July. But volume is still healthy

Heavy construction contracts slacked off in August from July's boom pace (ENR Aug. 4, p. 82). This is the first time in 1955 that contracts have shown any tendency to decline. The $1,240 million total was 26% below July's high volume and 2.4% below August 1954. Yet it was the third highest volume on record for August. The record was set in 1952, when a $1.2-billion contract for the Atomic Energy Commission's Portsmouth (Ohio) plant rocketed the month's total to $2.2 billion.

• **Private awards off**—Sharp declines in private construction and federal awards were mainly responsible for August's lower volume. Private mass housing dropped to an average of $89 million per week, lowest rate for any month this year, and 14% below July. This is the third consecutive monthly decline in housing awards. However, it still is a very sizable volume—60% above August of last year.

Commercial contracts also slumped sharply last month. Awards skidded to a weekly average of $24 million, the lowest since February. Industrial building was also off from the very high July rate, but the weekly average of $59 million was close to averages in other big months this year.

• **Federal slump**—The bottom dropped out of federal awards in August. Contracts fell to a weekly average of only $15.3 million, less than one-third of the high July volume and the lowest for any month since August 1954, which was itself a poor month. However, this decline in contracts does not indicate that contractors will have to look elsewhere for business in coming months. Congress has boosted appropriations for construction in this fiscal year. (See pages 21 and 22.)

• **State and municipal**—State and municipal work held up better than the other two categories mainly because of highway awards. In fact, August contracts set a record for the month—a weekly average of $109 million. Though 2% less than July, this is 6% above a year ago.

Highway awards held close to the July rate; the average was $44 million. This was about 12% higher than a year ago. Bridge awards declined from the high July weekly average, but were still fairly strong. Public buildings other than housing dropped to $35 million per week, after setting a very fast pace in July. But the August rate still compares favorably with other big months so far this year. Waterworks dipped to $6 million per week, while sewerage awards climbed to $7.4 million.

• **1955 to date**—Total awards so far this year are $12.3 billion, 32% above 1954 and 12% over the previous high in 1952. (That 1952 figure included more than $2.2 billion in atomic plants.)

Setting new records for the eight-months period are: Private work, up 44% over 1954 to $7.7 billion; state and local awards, up 10% over 1954 to $3.5 billion.

Federal awards racked up the biggest volume since 1952. They gained 44% over last year to a total of almost $1.2 billion.

• **Regions**—Since the end of the first half, two regions have extended their lead over 1954 volume. All regions remain ahead of last year.

The Mid-West's volume for the first eight months is 43% ahead of 1954, compared with a 31% increase at the end of June. New England has also stretched its gain from 21% at mid-year to 23% at the end of August.

By contrast, the 1955 gains are shrinking rather sharply in the other

ENGINEERING CONSTRUCTION CONTRACTS—AUGUST 1955

ENGINEERING NEWS-RECORD *reports continental U. S. Construction projects of the following minimum costs—Waterworks, excavation, drainage and irrigation,* $44,000; *other public works,* $73,000; *industrial buildings,* $93,000; *other buildings,* $344,000.

Four Weeks—Thousands of Dollars (000 Omitted)

	August, 1955							U. S. Cumulative Eight Months			
	New England	Middle Atlantic	South	Mid-West	West of Mississippi	Far West	Total U. S.	1955	1954	% Change '54 to '55	Canada August 1955
Public Works											
Waterworks	103	1,827	758	14,271	4,276	2,663	**23,898**	177,733	149,604	+19	1,078
Sewerage	1,051	10,160	2,562	8,497	3,684	3,807	**29,761**	252,783	246,814	+ 2	1,397
Bridges	3,205	3,709	2,851	10,584	10,042	3,906	**34,297**	309,579	315,186	− 2	5,856
Earthwork and drainage	509	8,213	1,211	161	7,568	2,052	**19,714**	338,499	180,507	+88	21,610
Streets and roads	7,148	13,043	26,463	34,492	82,870	13,340	**177,356**	1,427,914	1,194,369	+20	7,647
Public buildings, residential	1,343	.....	1,437	14,601	1,046	.....	**18,427**	183,152	164,258	+12	3,861
Other public buildings	10,927	20,974	26,170	19,570	20,336	41,123	**139,100**	1,161,427	1,158,890	+0.2	15,061
Unclassified	3,393	9,251	6,759	23,838	7,226	5,005	**55,472**	823,199	582,403	+41	7,346
Total public	**27,679**	**67,177**	**68,211**	**126,014**	**137,048**	**71,896**	**498,025**	**4,674,286**	**3,992,091**	**+17**	**63,856**
Federal government (included in above classifications)	3,266	3,028	26,124	3,753	18,539	6,580	**61,290**	1,166,721	807,983	+44	16,048
Private											
Bridges	.....	.....	.....	83	.....	.....	**83**	1,768	6,650	−74	.....
Industrial buildings	13,650	5,362	18,087	151,639	39,411	8,923	**237,072**	1,837,970	1,276,979	+44	44,672
Mass housing	9,197	85,172	3,255	95,647	123,898	38,239	**355,408**	4,175,067	2,780,469	+50	14,493
Commercial buildings	7,902	18,687	9,621	28,548	22,563	8,150	**95,471**	1,131,202	850,196	+33	6,419
Unclassified	87	100	12,500	790	36,393	3,739	**53,609**	527,739	443,246	+19	2,798
Total private	**30,836**	**109,321**	**43,463**	**276,707**	**222,265**	**59,051**	**741,643**	**7,673,686**	**5,357,540**	**+44**	**68,382**
Total Engineering Construction:											
August, 1955—4 weeks	**58,515**	**176,498**	**111,674**	**402,721**	**359,313**	**130,947**	**1,239,668**	.....	.....	....	**132,238**
July, 1955—4 weeks	81,185	419,607	194,252	385,357	400,466	203,296	**1,684,163**	.....	.....	....	135,971
August, 1954—4 weeks	49,892	363,869	124,073	208,066	327,305	197,746	**1,270,951**	.....	.....	....	365,212
Eight Months—1955	**609,564**	**3,388,323**	**1,288,647**	**2,777,240**	**2,894,744**	**1,389,454**	.....	**12,347,972**	.....	**+32**	**1,119,624**
Eight Months—1954	493,968	2,431,601	1,213,067	1,940,693	2,142,285	1,128,017	.....	.....	9,349,631	....	1,153,475
% Change '54 to '55	+23	+39	+6	+43	+35	+23	.....	.....	.....	....	−3

DROP-TIGHT SHUTOFF R-S Rubber-Seated Butterfly Valves give drop-tight closure to 125 psig through wedge-type action of the disc within a one-piece rubber seat. 65 of these valves, installed as shown for service in the San Jacinto River project near Houston, gave a substantial space reduction and direct, in-place cash savings of $124,000.

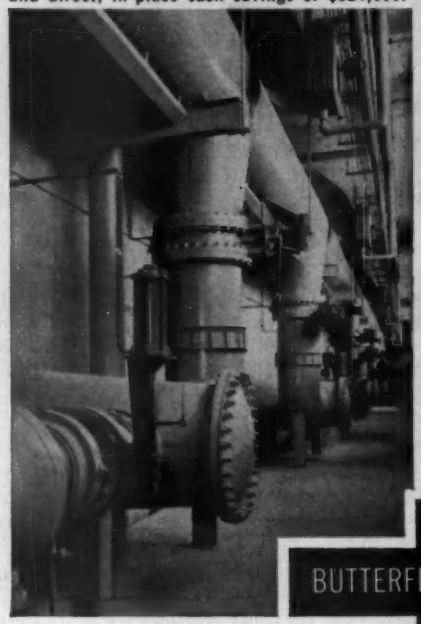

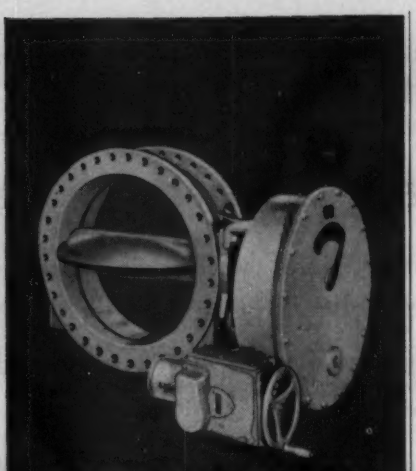

FOR HIGH-PRESSURE SERVICE SMS Babbit-Seated Butterfly Valves are built to give tight shutoff and meet the rugged demands of high-pressure service. They are available for shutoff pressures up to 200 psig, and for a wide range of velocities, including open-end free discharge.

BUTTERFLY VALVES

GET POSITIVE SHUTOFF, CUT CONSTRUCTION COSTS

For high or low-pressure water service, SMS has the Butterfly Valve to give you tight shutoff and help reduce construction costs. Using SMS or R-S Butterfly Valves in place of conventional gate valves permits a much more compact piping layout, means substantial savings in the initial building costs. For full information on the complete SMS valve line — Butterfly Valves, Ball Valves and Rotovalves —see our local representative or write S. Morgan Smith Co., York, Pa.

HYDRAULIC TURBINES
PUMPS
GATES & HOISTS
TRASH RAKES
ACCESSORIES
HYDRODYNAMICS
ROTOVALVES
BALL VALVES
BUTTERFLY VALVES
FREE-DISCHARGE VALVES
CONTROLLABLE-PITCH SHIP PROPELLERS

S. MORGAN SMITH

AFFILIATE: S. MORGAN SMITH, CANADA, LIMITED • TORONTO

regions. The Middle Atlantic is now 39% ahead of 1954; it was 60% ahead for the first half. The South is now only 6% over last year, compared with an 11% gain as of the first six months. The West-of-Mississippi is now 35%, compared with 46%, while the Far West is up 23% as against 40% at the end of June.

Cost Indexes Rise Slightly Due to Lumber, Wage Hikes

Construction costs have settled down since the sharp rise shown in the August indexes. For September, the ENR 20-cities Cost Indexes have increased very slightly. This month's upward nudge is due to lumber increases in five cities and a few scattered wage hikes in four cities.

The Construction Cost Index for September is 672.80, based on 1913 = 100. This is only 0.1% above the August index, but it's 5.1% higher than a year ago. The Building Cost Index for September gained 0.2% to 479.21, also based on 1913 = 100. Compared with a year ago, the Building Cost Index is up 5.5%. Both indexes are at new highs.

The persistent rise in lumber prices is now tapering off. ENR's price average for Douglas fir 2x4's is the highest yet recorded: $128.39 per Mftbm. This is only 0.5% above August; but it is also 7.4% higher than a year ago—and back then prices had already climbed because of a long strike at Northwest mills. Pine prices have risen even more in the past year. ENR's average for Southern pine 2x4's is now $100.47 per Mftbm, up 0.4% over August and 8.8% higher than a year ago.

For the September Construction Cost and Building Cost Indexes in each of 20 U.S. cities, plus Montreal and Toronto, see page 74.

Pennsylvania Turnpike Pushes Plans for New Extensions

The Pennsylvania Turnpike Commission announced last week that it intends to push construction of its Northwestern Extension along, just as soon as its traffic estimates show that revenue will be enough to cover debt requirements.

The commission already is planning to finance construction of a 35-mi link along Lake Erie between the New York Thruway and the Ohio border. The commission has not yet set a date for the financing, and a good guess might be that it will wait awhile in hopes of lower interest rates.

New York recently started extend-

ing the Thruway from its present terminus in Buffalo to the Pennsylvania line. Completion of the Thruway extension is scheduled for December 1965.

Presumably, the Turnpike Commission could delay the start of construction till next spring and still complete work on its short segment (which is in flat terrain) about the same time as New York.

• **Not feasible**—But the Pennsylvania agency says that the connecting route between the short Lake Erie section and the main line of the turnpike is not feasible yet. This part, and the stem of the "T", might possibly leave the main line in the Pittsburgh area go about 100 mi north to the crossbar of the "T."

The Turnpike Commission says it will push construction of the "stem"—or even parts of it—as soon as traffic studies show it can produce its share of revenue.

First step, however, will be construction of the already-feasible Lake Erie section. This is designed to carry along the long-distance traffic flowing off the Thruway and taking it on to the Ohio line, where it would connect with the proposed North-South Ohio Turnpike.

Business Briefs . . .

• **Home market survey** by the Federal Reserve Board shows that 15% of home-owners and 32% of renters aren't satisfied with their present quarters. The most common reason: not enough space. The percentage of those who have plans to buy or build this year or in 1956 is higher than it was in previous FRB surveys.

• **Price boost** of 4% is announced on clay and concrete products of American Vitrified Products Co. It gave as reasons: "Increased labor costs and increased costs of raw materials, such as coal, cement, and steel."

• **Cement Expansion**—Lone Star Cement Corp., of New York, now plans enlargements of plants in Hudson, N. Y., Dallas, and Houston, and a new 2,000,000 bbl plant at Lake Charles, La., to be finished next year. This will cost $35 million and brings the total of the company's current expansion program to $57 million, with a scheduled increase of 10.2 million bbl annual capacity.

• **New Delaware toll bridge**—The Delaware River Port Authority is seeking approval from the Pennsylvania and New Jersey legislatures for a new toll bridge, to cost about $50 million, across the Delaware between Camden and Philadelphia.

You can get the steel* you need from Levinson's large stocks

. . . when you need it!

Right now Levinson has under cover in stock the largest and most complete selection of the various sizes of steel beams, channels, angles, plates, sheets, and bars in its 52-year history.

If you need any of the above items, pick up your phone and call Pittsburgh, Pennsylvania, Hubbard 1-3200 and tell us what you want and ask for a quotation. You'll find Levinson, as it has in the past, never takes advantage of steel shortages to hike prices. Try Levinson and see—and if you need your steel fabricated, Levinson can do that too. Send your specifications.

**plain or fabricated*

Warehousers, fabricators, designers of steel for over half a century

the LEVINSON STEEL COMPANY

27th & Wharton Sts., Pittsburgh 3, Pa.

Phone HUbbard 1-3200

Imperial

the world's finest

TRACING CLOTH

In drafting rooms throughout the world Imperial quality is the standard by which fine tracing cloths are judged. This has been true for decades, and Imperial remains the finest tracing cloth because its makers have continued to improve its quality and value.

Activity This Week

As reported to ENR
(In millions of dollars)

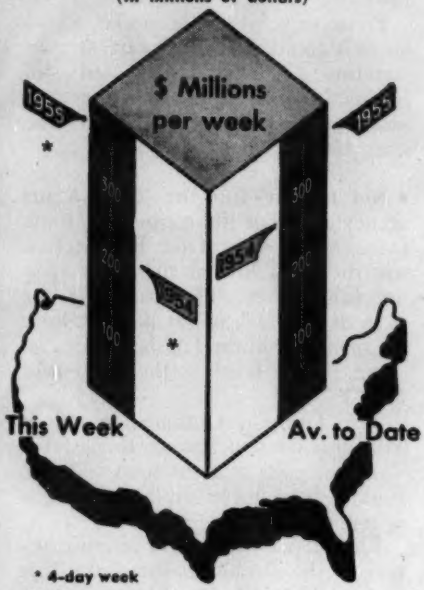

Amount of contracts let

(millions of dollars)

	This Week*	Cumulative 36 wks 1955	Cumulative 36 wks 1954	% chge
By Ownership				
Federal	$7.0	$1,193.0	$862.8	+38
State and municipal	78.9	3,731.1	3,399.3	+10
Total public	85.9	4,924.1	4,262.1	+16
Total private	289.8	8,129.8	5,684.9	+43
U. S. Total	$375.7	$13,053.9	$9,947.0	+31
By type of work				
Waterworks	$4.1	$186.9	$155.8	+20
Sewerage	5.3	264.4	263.1	+1
Bridges	9.8	329.7	341.6	−3
Highways	29.7	1,516.1	1,295.3	+17
Earthwork, waterways	7.0	362.3	191.6	+89
Buildings:				
Public, excl. hsg.	24.4	1,207.9	1,229.6	−2
Public housg.	0.5	215.0	167.0	+29
Private housg.	125.9	4,374.7	2,979.9	+47
Commercial	19.5	1,193.6	915.7	+30
Industrial	19.9	1,902.7	1,323.1	+44
Unclassified	129.6	1,500.6	1,084.3	+38
U. S. Total	$375.7*	$13,053.9	$9,947.0	+31

* 4-day week

NOTE: Minimum size projects included are: Waterworks and waterways, $44,000; other public works, $73,000; industrial buildings, $93,000; other buildings, $344,000.

New capital for construction

	Week of Sept. 1	Cumulative 35 Wks 1955	Cumulative 35 Wks % Chge '54-'55
Corporate securities	$37.2	$2,242.2	+9
State and municipal:			
All except housing	78.8	2,844.3	−21
Housing	...	72.0	−21
Federal loans	...	88.2	+9
Federal aid	...	853.5	+27
Total nonfederal	$116.1	$6,100.2	−6
Federal appropriations:			
In U. S.	...	3,379.7	+63
Outside U. S.	...	84.6	+155
Total new capital	$116.1	$9,564.5	+11

ENR cost and volume indexes, 1955

		Base years = 100 1913	1926	1949
Construction cost	9/1†	672.80	323.41	141.04
	7/28†	672.24	323.15	140.92
Building cost	9/1†	479.21	259.05	136.22
	7/28†	478.03	258.41	136.01
Volume	Aug.	508	207	147
	July	699	284	202

† Official ENR Indexes for Aug. & Sept.

REINFORCED CONCRETE DESIGNS...



....all worked out!

• Does away with laborious calculations. Simply locate the table covering the member you are designing, apply span and load requirements, then *read off* concrete dimensions and reinforcing steel data. Follows latest codes and practices. Ten-day, money-back guarantee. No C.O.D.'s please.

CONCRETE REINFORCING STEEL INSTITUTE
DIV. D

412 PAGES
$5.00 POSTPAID

38 South Dearborn Street, Chicago 3, Illinois

The BELMONT IRON WORKS

Engineers — Fabricators — Erectors
Contractors — Exporters
Cable address—Beliron

STRUCTURAL STEEL
BUILDINGS & BRIDGES
RIVETED — ARC WELDED

Shops: Eddystone, Pa.—Philadelphia, Pa. Royersford, Pa.

22nd St. & Washington Ave. Philadelphia 46, Pa. Main Office

New York Office 44 Whitehall St., N. Y. 4, N. Y.

McKIERNAN-TERRY

WIDE-RANGE LINE OF
PILE HAMMERS
AND
EXTRACTORS



Now made in complete standardized line of 11 double-acting hammers, 5 single-acting hammers and 2 double-acting extractors. Also Sand Drain Equipment and Steam Generators.

Write for free descriptive Bulletins.

Also builders of coal and ore bridges and unloaders, and specially designed machinery.

McKIERNAN-TERRY CORP.
80 Richards Ave., Dover, N. J.

Pre-cut, pre-curved roof deck speeds erection time, covers up to 4,000 sq. ft. a day!

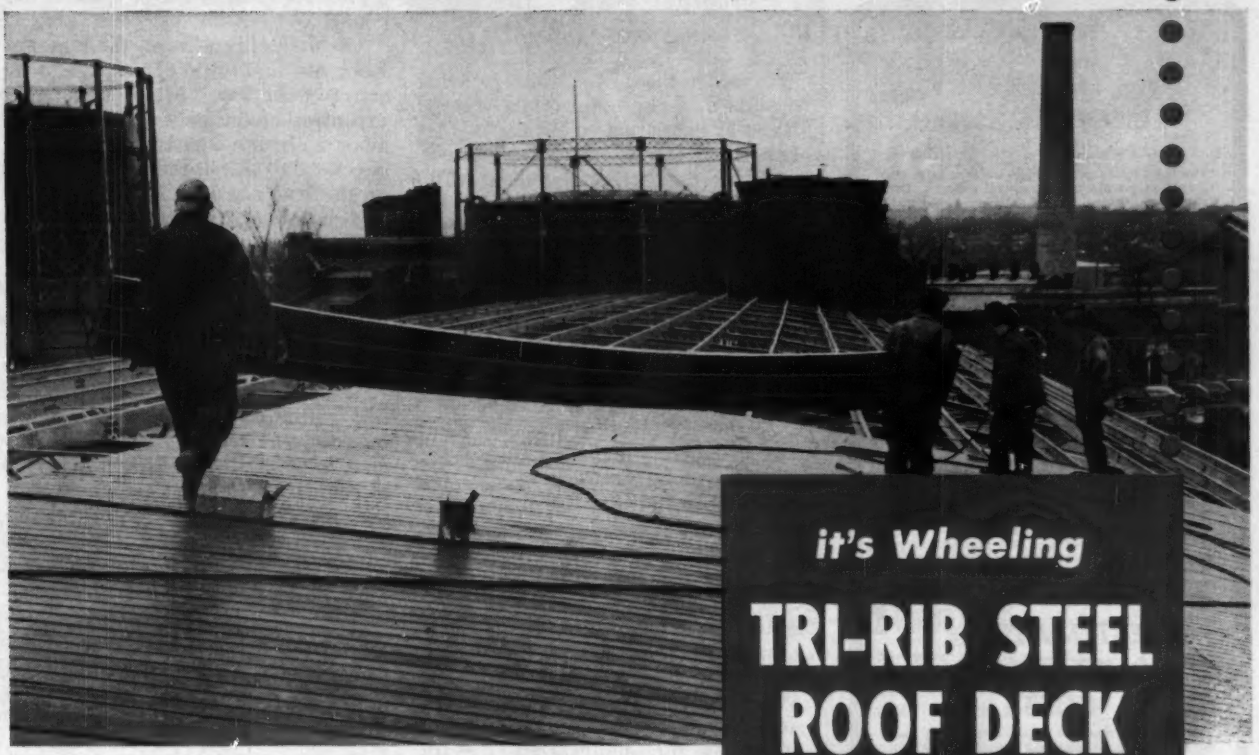

it's Wheeling

TRI-RIB STEEL ROOF DECK

—and its COP-R-LOY® base means longer life!

Grooved for quick, easy attachment, Wheeling Tri-Rib Steel Roof Deck covers large areas fast. A crew of 4 can lay up to 4,000 sq. ft. a day. No trick attachments, Tri-Rib spot welds directly to purlins. And by reducing dead load up to 22 lbs. per sq. ft., Tri-Rib permits use of fewer columns, shallower footings, no sub-purlins . . . saves valuable structural steel. Write for full details, or see our catalog in Sweet's.

Highway Construction—use Wheeling Galvanized Corrugated Culverts. Copper steel or pure iron. Manufactured to comply with Federal and all state highway specifications. Write for details.

DESCRIPTION

- **METAL THICKNESS:** *18, 20, or 22-Gauge Cop-R-Loy Steel sheets.*
- **FINISH:** *Zinc chromate iron oxide primer coat baked on after fabrication.*
- **LENGTHS:** *up to and including 22 feet, 6 inches.*
- **WIDTH:** *18 inches.*
- **PANEL WEIGHT:** *50 to 67 lbs., depending upon size of panel.*
- **RIB DEPTHS:** *1½", 1¾", 2", 2½", spaced 6" on centers.*
- **DEAD WEIGHT:** *8 to 10 lbs. per sq. ft. when insulated and with built-up roofing.*

Designed in accordance with specifications adopted by A. I. S. I. for light gauge structures, dated January, 1941.

Wheeling

steel does it better...Tri-Rib does it best!

WHEELING CORRUGATING COMPANY • WHEELING, WEST VIRGINIA

ATLANTA BOSTON BUFFALO CHICAGO COLUMBUS DETROIT HOUSTON KANSAS CITY
LOUISVILLE MINNEAPOLIS NEW ORLEANS NEW YORK PHILADELPHIA RICHMOND ST. LOUIS

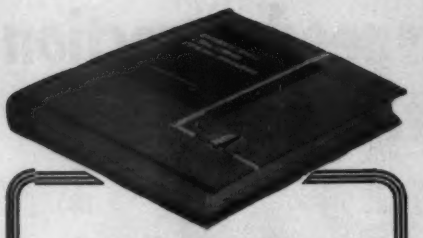

WATER SUPPLY ENGINEERING

Just Published—Fifth Edition

Thorough treatment of public water supply, also including private and industrial supplies. Discusses all phases of the subject necessary to complete waterworks planning and design—financial and administrative principles, estimating usage, computing surface runoff and ground-water supplies, hydraulics of flow, materials and their use, pumping stations, etc. Includes extensive treatment of water purification. **By H. E. Babbitt, San. Eng., and J. J. Doland, Prof. of Hydraulic Eng., Univ. of Ill. 5th Ed. 675 pp., 257 illus., $8.50**

PUMPS

Types, Selections, Installation, Operation and Maintenance

A complete and practical treatment of pumps and pumping problems. Discusses pump applications, performance, and service limitations . . . gives details on installing, operating, and maintaining them at peak efficiency. All important types are covered, including: reciprocating, centrifugal, turbine, propeller, and rotary pumps. Important types, like deep-well, boiler-feed, sewage and sludge, and sanitary pumps are treated in separate chapters. **By Frank A. Kristal, Lic. Prof. Engr., and F. A. Annett, Contributing Editor, POWER. Second Edition. 373 pp., 417 illus., $6.50**

ESTIMATING CONSTRUCTION COSTS

Here are the practical considerations you need to know to make accurate estimates on engineering projects—the understandable methods and helpful data you need for realistic, sound estimating. Each major type of construction is covered in detail not only on materials, labor, and equipment, but on overhead and profit as well. Over 100 time-saving tables help you make speedy, accurate estimates. **By R. L. Peurifoy, Prof. of Civil Engineering, A&M College of Texas. 350 pp., 60 illus., $8.00**

HANDBOOK OF HYDRAULICS

Here in compact, accessible form are the many tables and other reference data required by the practicing hydraulics engineer who wants to speed his computations without losing accuracy. Covers every phase of common practice as well as many special problems. Condenses and simplifies rules and formulas. **Fourth Edition** includes information on fluids other than water, orifices and sluice gates, weirs, pipes, uniform and non-uniform flow in open channels, etc. **By H. W. King. Revised by E. F. Brater, Prof. of Hyd. Engrng. Univ. of Mich. Fourth Edition. 567 pp., 133 tables. 165 illus., $8.00**

READ THESE BOOKS
10 DAYS FREE

McGraw-Hill Book Co. Att: H. W. Buhrow
Industrial & Business Book Dept.
327 W. 41st St., N.Y.C. 36

Send me book(s) checked below for 10 days' examination on approval. In 10 days I will remit for book(s) I keep, plus few cents for delivery costs and return unwanted book(s) postpaid. (We pay delivery cost if you remit with this coupon—same return privilege.)

- ☐ Babbitt & Doland—**Water Supply Eng.**—$8.50
- ☐ Kristal & Annett—**Pumps**—$6.50
- ☐ Peurifoy—**Estimating Const. Costs**—$8.00
- ☐ King & Brater—**Hndbk. of Hydraulics**—$8.00

(PRINT)
Name .....
Address .....
City .....Zone....State.....
Company .....
Position .....
For price and terms outside U. S., write McGraw-Hill Int'l., NYC. NR-9-8

LABOR

"United We Stand"

Merger was the big theme for Labor Day

It was on the AFL-CIO merger that organized labor pinned its biggest hopes as the nation celebrated its 61st Labor Day last Monday.

In his Labor Day statement, CIO president Walter Reuther said the new federation brings labor to "the threshold of a challenging new era.... This day, to an even greater degree than usual, is a time for looking forward—with great expectations—to the benefits that a united labor movement will bring not only to the workers, but to all the people of our great nation."

As the day ended, it was more clear than ever before that the results of the merger will be far-reaching. To the construction industry it will add up to more than a new and distant roof over the building trades even though their autonomy will be retained. Economically and politically, the proposed federation has an ambitious program.

Speaking to the millions of American trade union members on Monday, AFL president George Meany emphasized the "primary responsibility of organizing the unorganized." With an end to "civil war" within the ranks of labor, he confidently expects concentration of efforts on union organization.

Closely related—and high on the list of current goals—is a "more secure and more abundant" future for all. Hopeful of obtaining "greater equity in the distribution of purchasing power," Reuther said the CIO will continue to seek "a more just economic relationship among all the groups in our national economy," and will strive to "protect the interest and advance the welfare of America's most precious resource: the individual human being who constantly seeks a better life, a higher standard of living. . . ."

While Meany warned that the federation, directly and indirectly representing nearly a third of our population, will give labor "more power at the bargaining table," William Schnitzler, AFL secretary-treasurer, had this to say: "The AFL and CIO, made stronger because they are one, will be better able to see that the working men and women of America earn and are thus able to put into circulation a more fair share of the wealth they produce." There will be no attempt "to horsewhip the rest of the country," Meany assured, because the new federation "is dedicated, not to predatory objectives, but to serve as a force for good in the progress of our country."

On the political front, the hopes of labor are high. "We have made no secret of the fact," Meany said, "that expansion of the political activities of labor is slated when the merger takes effect. . . ." Right-to-work laws, now on the books of 18 states, and "manifold injustices," in the Taft-Hartley Act still lead the list of targets, but the whole broad field of social legislation—from social security to public housing—is already on the agenda for "strictly non-partisan" action on the part of labor.

While emphasizing labor's hopes and ambitions, labor leaders unanimously acknowledged the "tremendous responsibility" which the merger places on labor. "Let us prove once and for all, by deeds as well as by words," Meany urged, "that the united labor movement will serve as a force for good in the life of our nation."

And stressing the same point, Reuther offered this sober warning: "We know that a united labor organization can win the confidence of all Americans only as it keeps its own house in perfect order and dedicates itself with firmness and determination to serving not just the interests of the unions, but the welfare of the nation and all its people."

Unions Must Pay

Court outlines recovery of illegal strike losses

The Colorado Supreme Court, wrestling again with problems posed by unlawful union activity of the Denver Building and Construction Trades Council, has upheld a $26,000 award against the council and set a precedent for damages favorable to contractors.

Contractors' losses caused by job delays resulting from union activity not protected by the Taft-Hartley Act, it says, can be recovered in any court of competent jurisdiction, whether state or federal. And the logical yardstick of damage, where construction progress is delayed by the shutdown of equipment, is loss of use of idle machinery—not loss of profits as such.

• **What happened**— Henry Shore, contractor, got into trouble when he hired both union and non-union labor

on a state highway project. When he failed to heed the warning of the Denver Building and Construction Trades Council to use all union labor, the council picketed the project, the operating engineers walked off, and the project was delayed.

In a series of legal actions, a Colorado court found the union activity in violation of the state Labor Peace Act and granted an injunction. The NLRB and a federal court declared the council guilty of an unfair labor practice. And the case went before the state supreme court three times on appeal.

• **Issues**—Principal questions on the last appeal were whether a state court could award damages to the contractor and what they should be.

Shunning the ticklish question of original jurisdiction in labor cases, the court argued that state and federal laws haven't yet so tied the hands of state courts that they can't award damages for interference with work projects—at least where the federal law doesn't protect the union activity that caused it.

Loss of profits as a measure of damages made little sense to the court—too many factors are involved and you can't tell what proportion of the overall profit is attributable to each piece of heavy equipment. Only logical method, it said, is to compute the value of the time lost by the idle machinery. The formula: fair rental value of the equipment during the period it was idle.

Unless otherwise provided by contract or statute, the court added, interest on the damages so computed and attorney fees incurred by the contractor can't be recovered.

Although Shore had made a profit on the job despite delays, he won $26,000 in damages, but lost his claim for $8,428 as interest and $3,250 for legal fees.

Cement Masons Lag Behind But Win a Bigger Increase

AFL cement masons employed by members of the Building Trades Employers Association of Cleveland, Ohio, were granted a 15-cent hourly wage increase last week by William J. Kennedy, arbiter.

Among the last of the trades to settle, the union had refused to go along with the 7.5-cent settlement agreed to by most of the other trades. Ten of the crafts had previously signed two-year contracts granting a 7.5-cent increase each year, with no changes in fringe benefits. Electricians held out for more and won 10 cents in a one-year contract, and terrazzo mechanics

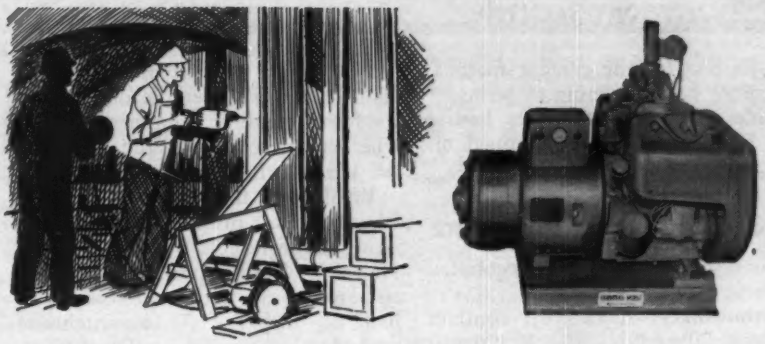

Fairbanks-Morse dependable generators

...on construction jobs anywhere!

You'll find Fairbanks-Morse power generators used almost everywhere in the world — on dams, bridge jobs, in oil fields, military building sites, industrial construction and on other jobs where independent electric power supply is needed.

These generators range in capacities from the handy little 600 watters for powering flood lights and tools to the 125 kw. models, large enough to supply light and power for a small city!

No matter what division of the construction industry you're in, you ought to have a copy of our free catalog which gives complete details about power generators. Write Fairbanks, Morse & Co., Chicago 5, Ill.

FAIRBANKS-MORSE

a name worth remembering when you want the best

WATER SYSTEMS • GENERATING SETS • MOWERS • MAGNETOS
PUMPS • MOTORS • SCALES • DIESEL LOCOMOTIVES AND ENGINES

Greater Value Per Dollar With WARREN-KNIGHT TRANSITS & LEVELS

29 Special and exclusive features of design and construction result in assured accuracy—ease and convenience in handling — lower maintenance costs — longer instrument life — time and money saved in use. All these, plus — a lower price and direct shipment from the Factory assures— THE GREATEST VALUE FOR DOLLAR OF INVESTMENT

Send for FREE Catalog NR-59

WARREN-KNIGHT

136 NORTH 12TH STREET PHILADELPHIA 7, PA.

A New WAY TO

IDENTIFY REFERENCE POINTS **Permanently-**

FOR PROPERTY LINES
RIGHTS-OF-WAY
PIPE LINES
Simply DRIVE

Can't Rust! thick copper covering molten welded to steel core

Write for Bulletin 144

Copperweld SURVEY MARKERS

Copperweld* Survey Markers provide permanent, easy-to-locate points of reference that eliminate troublesome disputes. Economical and easy to drive, they can't rot or rust—won't splinter, bend or break. Bronze head can be center-punched and stamped for identification. If larger head is needed, a 4" adapter is available.

*Trade Mark

Standard length is 3 feet—other sizes made to order. Packed 10 markers to a carton.

COPPERWELD STEEL COMPANY
WIRE AND CABLE DIVISION Glassport, Pa.

DUDGEON HYDRAULIC JACKS

SALES RENTALS

• CAPACITY TO 600 TONS

FOR:
PILE TESTING
•
UNDER-PINNING
•
BRIDGES
•
PIPE PUSHING
•
SOIL TESTING

Write to Dept. 8

RICHARD DUDGEON INC.

789 BERGEN ST. • ST 9-4040 • BROOKLYN, N. Y.

were waiting for the cement masons' settlement before coming to terms.

Under the new contract, hourly rates for cement masons jumped on Sept. 1 from $3.25 to $3.40.

More Boosts Here and There

Among contracts recently negotiated are these:

• **Ironworkers**—A two-year contract for Local 70 in Louisville, Ky., granting a 25-cent boost: 10 now, 2.5 Jan. 1, 10 Aug. 1, and 2.5 the following Jan. Basic rates (now $3.05) in 72 Kentucky and 10 Indiana counties will go up to $3.30 by 1957.

• **Carpenters**—A 25-cent package increase, ending a three-week strike in Racine, Wis. Seven cents goes to health and welfare—the balance to basic rates.

• **Plumbers**—A one-year contract with a 7-cent boost (raising the scale to $3.00) for Local 90 in Syracuse, N. Y.; and a one-year contract for Locals 107 (plumbers) and 522 (pipe fitters) in Louisville, Ky., with a 10-cent increase, upping the scale to $3.175, plus 2.5 cents for a jointly administered journeyman and apprentice training fund.

• **Sheet metal workers**—A one-year contract for Local 104 in San Francisco, granting a 15-cent hike plus 3% of gross earnings as vacation pay (limited to the equivalent of six paid holidays). New scale is $3.15.

• **Roofers**—Local 86 in Columbus, Ohio, signed a two-year contract, granting a 32.5-cent increase. Members get 15 cents now, and the balance in three installments next year, raising the scale to $3.075.

Secondary Boycotts

Can't confine picketing to where dispute arose

Although the line between legal and illegal secondary boycotts in the construction industry is still a thin one, a federal court has warned the NLRB against complicating the problem by being arbitrary.

Facing the question involved when the primary employer is conducting operations at several places, including a common site, it has ruled that the board has no authority to fix the situs of a dispute at only one of the primary employer's numerous business activities. To do so, it said, would isolate other employes of the primary employer from exercising their right to engage in mutual aid or protection.

The proper test, according to the court, is not whether the dispute has its focal point at another site, but whether picketing at the common site has a lawful objective.

Involved in the picketing was Otis Massey Co., insulation contractor, doing subcontract work at several Houston, Texas, projects where it employed only trades with whom it had no dispute. At a warehouse several miles away, it employed teamsters who occasionally made deliveries to the construction sites and with whom it did have a dispute. The teamsters struck and picketed the projects, but clearly indicated the dispute was with Massey and not the neutral employers.

The NLRB enjoined the picketing as illegal because the situs of the dispute, it said, was at the warehouse.

Overruling the board, the Court of Appeals for the Fifth Circuit said ". . .we think such peaceful picketing upon common premises directed solely against the primary employer with whom a labor dispute exists is still lawful under the Act, and that any adverse effect upon secondary, neutral employers must necessarily be viewed as incidental to the lawful exercise of that statutory right."

Labor Briefs . . .

• **Safety Award**—Blaw-Knox Company has received an AEC Award of Merit for its safety record last year on construction of a multi-million-dollar facility for the AEC at Richland, Wash., by its Chemical Plants Division. The two-year project required a peak labor force of 4,400 men. More than 1,100,000 accident-free hours of work performed in a three-month period.

• **Top Apprentices**—Winners of the second annual apprenticeship contest sponsored at Purdue University by the United Association of Plumbers and Pipefitters were Thomas J. Tobin, Jr., of Pipe-Fitters Local 420, Philadelphia, and Jack F. Goold of Plumbers Local 3, Aurora, Colo. Top honors in lead work went to Dale B. Morrow of Local 176, Tulsa, Okla.

• **Expelled**—In an effort to preserve the effectiveness of contractor associations as a collective bargaining unit, the Associated Contractors of Essex County, N. J., expelled one of its members and recommended similar action by the State Association. The action was taken after the contractor-member signed independently with carpenters who are still on strike over a new wage contract.

OFFICIAL PROPOSALS

Bids: September 21, 1955

Pennsylvania Turnpike Commission
Harrisburg, Pennsylvania

NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 10:00 a. m. Eastern Daylight Saving Time, the 21st day of September 1955, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room #1, North Office Building, State Capitol, Harrisburg, Pennsylvania and publicly opened and read aloud for the following contract:

For the Construction of Heating System for the Quakertown Maintenance Building at Turnpike Station 266+84, Bucks County, Contract No. 560-B.

The work to be performed under this contract is generally in and around the Maintenance Building at the Quakertown Interchange. The work does not include the Plumbing System, the Heating System nor building construction except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans, specifications and Contract Documents are on file and open to public inspection on 31 August 1955 at the office of the Pennsylvania Turnpike Commission in Harrisburg, Pennsylvania, at the Commission's Field Office in Conshohocken, Pennsylvania, 10th Avenue and Hallowell Street, at the Commission's Field Office in Lehighton, Blakeslee Boulevard, Lehighton, Pennsylvania and the Commission's Field Office in Quakertown, Route 663, Quakertown, Pennsylvania. Plans, specifications and other contract documents will not be available before this date for mailing to prospective bidders.

Plans and contract documents may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set. No refund will be made for plans returned, unless the project is withdrawn from letting by the Pennsylvania Turnpike Commission.

Remittances are payable by check or P. O. money order to the Pennsylvania Turnpike Commission and must accompany requests for drawings, specifications and contract documents.

Copies of Specifications for grading, drainage, paving and structures may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per copy.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
22 August 1955

U. S. Government

Bureau of Reclamation, North Platte River Projects 81653-P-3, Casper, Wyoming. For Immediate Release August 16, 1955. UNITED STATES, DEPARTMENT OF THE INTERIOR, BUREAU OF RECLAMATION. NOTICE IS HEREBY GIVEN that sealed bids on Specifications No. 703C-383 for furnishing labor and materials and performing all work for STREETS AND WALKS, TRAILER COURT AND UTILITIES FOR COMPLETION OF GLENDO GOVERNMENT HOUSING, Oregon Trail Division, Glendo Unit, Wyoming, Missouri River Basin Project, will be mailed or delivered to the office of the Bureau of Reclamation, Glendo, Wyoming, in time for the public opening at 1030 a.m., Mountain Standard Time, September 13, 1955. Copies of the standard forms and of the specifications may be obtained from the following offices of the Bureau of Reclamation: R. J. Walter, Jr., Regional Director, Building No. 46, Denver Federal Center, Denver, Colorado; C. S. Rippon, Construction Engineer, Glendo, Wyoming; and I. J. Matthews, Projects Manager, Box 280, Casper, Wyoming. No charge for copies of the specifications and drawings furnished for bidding purposes; for all others $1.50 per copy, not returnable. Payments should be made by check or money order payable to the Treasurer of the United States. I. J. Matthews.

OFFICIAL PROPOSALS

Bids: September 22, 1955

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.,—Pursuant to the provisions of the Highway Law, and Article 2, Title 9 of the Public Authorities Law, and special provisions for projects financed with Federal Aid Funds, sealed proposals will be received until ten-thirty o'clock A.M., advanced standard time, which is nine-thirty o'clock A.M., eastern standard time, on the 22nd day of September 1955, by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects:

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
DISTRICT No. 1, N. F. Ronan, Acting District Engineer, 353 Broadway, Albany, N. Y.						
Albany	C.T. 55-13	New York State Thruway: Catskill Section-Sub. 3A (Albany Div. Maint. Bldg. Site)	....	Grading, Paving and Misc. Work	$5,500 Plans $10	$100,000
Greene	C.T. 55-12	New York State Thruway, Catskill Section-Sub. 7 (Catskill Maint. Bldg. Site)	....	Grading, Paving and Misc. Work	$3,000 Plans $10	50,000
DISTRICT No. 3, Wm. Robinson, District Engineer, Weigh Lock Building, Syracuse, N. Y.						
Onondaga	O.T. 55-9 M.T. 55-10	New York State Thruway, Ontario Section-Sub. 8A Mohawk Sect.-Sub. 8B	....	Furnish and Install 8,200 L.F. Chain Link Fence 16,000 L.F. Cattle Wire Fence	$2,000 Plans $10	36,000
DISTRICT No. 5, E. G. H. Youngmann, District Engineer, 65 Court Street Buffalo, N. Y.						
Chautauqua	E. T. 55-7 S.T. 55-9	New York State Thruway, Erie Section-Sub. E-2B (West Forest Road to Brockton) Walker Rd., Pecor Rd., Mathews Rd., Lake Ave. & Acc. & Marginal Roads	4.88 (2.40) (Acc.)	Two Crse. Cem. Conc. Pavt. 2 @ 25'=4.86 Mi. Bit. Mac. Pen. Meth. Asp. Type 1=1.02 Mi. Asp. Conc. Ty. 2B=0.22 Mi. Gravel Surf. Treat.=0.97 Mi. Misc. Work=0.21 Mi. 6 Sep. Comp. I-Beam 144.5', 271.7', 330', 188.5' 182.5' and 138' 1 Reinf. Conc. Arch 20.7'	$215,000 Plans $50	3,908,000
Chautauqua	E.T. 55-9	New York State Thruway, Erie Section-Sub. E-3A (Brockton to Pomfret Town Line) (Sep. of Grades with the New York Central, Nickel Plate and Pennsylvania RR'S near Swede Rd.)	0.23	Two Crse. Cem. Conc. Pavt. 2 @ 25'=0.13 Mi. Cem. Conc. Pavt.=0.10 Mi. 2 Prs. Comp. I-Beam @ 432' ea.	$78,000 Plans $15	1,416,000
Erie	E. T. 55-8 R.C. 55-72 S.T. 55-10	New York State Thruway, Erie Section, Sub. E-6B (Cain Rd. to Evans Ctr.-Eden Rd.) Angola-Brant-Farnham, Angola-Evans Center, S. H. 642, Cain Rd., Pontiac Rd., Ryther Rd., Gowans Rd., Evans Ctr.-Eden Rd. & Versailles Plank Rd.	4.48 (2.94) (Acc.)	Two Crse. Cem. Conc. Pavt. 2 @ 25'=4.37 Mi. Cem. Conc. Pavt.=0.07 Mi. Asp. Conc. Opt.=2.94 Mi. Misc. Work=0.04 Mi. 4 Hy. Seps. Comp. I-Beam 350', 432', 330' & 320' 2 Brs. Comp. I-Beam @ 278' ea. 3 Brs. Twin Box @ 20' ea.	$232,000 Plans $100	4,225,000
DISTRICT No. 7, R. W. Sweet, District Engineer, 444 Van Duzee St., Watertown, N. Y.						
Jefferson	D.A. 55-2	Dry Hill Access Road Proj. D-AD-4(2)	1.15	Asp. Conc. Opt.=1.14 Mi. Misc. Work=0.01 Mi. Misc. Work=0.01 Mi.	$3,000 Plans $10	51,000
DISTRICT No. 8, J. S. Bixby, District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y.						
Ulster	C.T. 55-11	New York State Thruway, Catskill Section-Sub. 3B (Kingston Maint. Bldg. Site)	....	Grading, Paving and Misc. Work	$3,500 Plans $10	63,000
Westchester	H.T. 55-7	New York State Thruway, Hudson Section-Subs. 9A, 10 & 11 (New York City Line to Tappen Zee Br., East Approach)	....	Furnish and Install 25,900 L.F. Chain Link Fence 2,750 L.F. Woven Wire Fence	$7,000 Plans $10	113,000
DISTRICT No. 10, M. E. Goul, District Engineer, Montauk Highway at Little East Neck Road, Babylon, L. I., N. Y.						
Suffolk	SMSP 55-2	Sunken Meadow Spur Parkway Contract No. 7	0.95	Relocation of Stream Channel	$12,000 Plans $10	208,000
Nassau	FASS 55-7	Peninsula Boulevard, Cont. 4 (Lexington St. to Southern State Pkwy.) Proj. S-319(5)	1.32	Asp. Conc., Opt.=1.13 Mi. Misc. Work=0.19 Mi. 2 Ped. Overpasses I-Beam 124.7' ea.	$55,000 Plans $15	925,000

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts and Accounts, Albany, N. Y., and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement, and to the special provisions applying to projects financed with federal funds. Award of contract is subject to priorities and allocations under the Defense Production Act of 1950, as amended, and all regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Laws, as set forth in "Instructions to Bidders."

When optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated.

The right is reserved to reject any or all bids.

JOHN W. JOHNSON
SUPT. OF PUBLIC WORKS

Bids: September 15, 1955

New York State Road Work

NOTICE TO CONTRACTORS

STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of the Public Buildings Law, sealed proposals will be received until 10:30 A.M., Daylight Saving Time, on September 15, 1955 by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, the Governor Alfred E. Smith State Office Building, Albany, N. Y. for:

Contract B.P. 55-34A for Beach Protection (Extension of Stone Groins) at Troy and Clayton Avenues East Atlantic Beach, Town of Hempstead, Nassau County, New York

AND

Contract B.P. 55-51, Part III for Beach Protection (Four Stone Groins) at Atlantic Beach, Town of Hempstead, Nassau County, New York

Maps, plans and specifications may be examined and obtained at the following offices:

(a) Bureau of Contracts and Accounts, 14th Floor, The Gov. Alfred E. Smith State Office Bldg., Albany, New York.
(b) Mr. M. E. Goul, District Engineer, 325 West Main Street, Babylon, Long Island, N. Y.
(c) Mr. Charles Schaefer, Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is $10.00. A refund in full will be made to bidders for return of one set in good condition within 30 days of award or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Engineer's Estimate of Cost for each of these Contracts is as follows:

B.P. 55-34A	$108,000.00
P.P. 55-51, Pt. III	735,000.00

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each roposal must be accompanied by draft or certified check, payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum of five percentum, (5%) of the bid. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instruction to Bidders". The right is reserved to reject any or all bids.

J. W. JOHNSON
SUPERINTENDENT OF PUBLIC WORKS

Bids: September 21, 1955

Construction of Trunk Sewer

CONSTRUCTION OF
CONTRACT NO. I
WEST SIDE TRUNK SEWER
STATE FAIR BOULEVARD TO BRIDGE STREET, AND FREEMAN AVENUE SEWER EXTENSION
WEST SIDE SANITARY DISTRICT
ONONDAGA COUNTY, NEW YORK

Separate sealed bids for the construction of the West Side Trunk Sewer, State Fair Blvd. to Bridge Street, and the Freeman Avenue Sewer Extension will be received for the Onondaga Public Works Commission by the County Purchasing Agent, Room 107, County Court House, Syracuse 2, New York until 2 P.M. (Eastern Daylight Saving Time), September 21, 1955 and there at said office publicly opened and read aloud.

The West Side Trunk Sewer includes the construction of approximately 5,000 lineal feet of 42-inch sanitary sewer and approximately 240 lineal feet of 20-inch and 21-inch sanitary sewers, together with all connections and appurtenances.

The Freeman Avenue Sewer Extension includes the construction of approximately 2,500 lineal feet of 24-inch sanitary sewer with all connections and appurtenances.

Information for Bidders and all Contract Documents may be examined at the said office and copies of the same obtained upon payment of Ten Dollars ($10.00) for each set. Any bidder who has submitted a bona-fide proposal, upon returning such set in good condition within thirty days of the date of receiving bids, will be refunded the full amount of his deposit. One-half of the deposit will be refunded to all non-bidders upon return of such set within thirty days of the date of receiving bids.

Copies of the Contract Documents may be examined at no expense at the above office, at the office of the Onondaga Public Works Commission, Room 400, County Court House, Syracuse 2, New York, and at the office of O'Brien & Gere, Consulting Engineers, 400 East Genesee Street, Syracuse 2, New York.

The right is reserved to waive any informalities in the bids and to reject any or all bids.

ONONDAGA COUNTY
By R. W. Sollinger
Purchasing Agent

Dated: Aug. 24, 1955

U. S. Government

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4502) will be received at Winters, California, until October 11, 1955, for furnishing labor and materials for fish collecting facilities, Delta-Mendota Canal Intake, Central Valley Project, California. Location near Tracy, California in Alameda and Contra Costa Counties. Principal items are 112,000 cu. yds. excavation; 5,200 cu. yds. concrete in structures; 125,000 lbs. furnishing and installing trashracks and trashrack metalwork; 30,000 lbs. furnishing and installing steel and cast-iron pipe and fittings; and other work. Completion time 215 days. For particulars, address Bureau of Reclamation, P. O. Box 546, Winters, California; or Building 53, Denver Federal Center, Denver 2, Colorado. W. A. Dexheimer, Commissioner.

OFFICIAL PROPOSALS

Bids: September 20, 1955

State of New Jersey
State Highway Department
Trenton

NOTICE IS HEREBY GIVEN that sealed bids will be received by the State Highway Commissioner for:

ROUTE 48 (1927) U.S.40 (1953), SEC. 30 Route 48 (1927) Route U.S. 40 (1953), Section 30, from Jonathan's Thorofare to Shore Road, Widening and Resurfacing, Egg Harbor Township and City of Pleasantville, Atlantic County. Federal Project No. F-89(7). Length 2.131 miles. The principal items of work are:

Estimated:

4,728 cu. yds. Roadway Excavation, Earth
1,148 sq. yds. Pen. Gravel Surface Course, 2" thick
21,872 sq. yds. Macadam Base Course, 4" thick
21,707 sq. yds. Pen. Mac. Inter. Course, 3" thick
1,006 cu. yds. Road Gravel
7,700 tons Pavement Type FA-BC-2, Top Course
3,100 tons Pavement Type FA-BC-2, Bottom Course
6,087 lin. ft. Corrug. Metal Culvert Pipe, various sizes
41—Inlets and Manholes
18,352 lin. ft. White Concrete Vertical Curb
7,897 sq. yds. Concrete Sidewalk, 4" thick
3,794 sq. yds. Concrete Drives & Gutters, 6" thick

Bids for the above will be received at the office of the State Highway Department, in the CAFETERIA, State Highway Office Building, 1035 Parkway Avenue, Trenton, N. J., on Tuesday, September 20, 1955, at NINE o'clock (9:00 A.M.—EASTERN STANDARD TIME), TEN o'clock (10:00 A.M.—DAYLIGHT SAVING TIME), and will be opened and read immediately thereafter.

The receipt and opening of bids is subject to the proper qualification of the bidder in accordance with the provisions of the prequalification law and the regulations adopted by the State Highway Commissioner. Bidders must also submit a revised financial statement and statement of plan and equipment with their bid.

NOTE: The proposed project is a "Federal Aid Project" authorized by the provisions of Title 27 of the Revised Statutes of New Jersey and supplements and by P. L. 350, 83rd Congress, and is to be performed in accordance with the "Required Provisions-Federal Aid Contracts" of the Bureau of Public Roads, Department of Commerce, as outlined in the specifications. The attention of the bidders is directed to the special provisions covering subletting or assigning the contract. The minimum wage paid to all common labor employed on this contract shall be $0.75 per hour. The minimum wage paid to all intermediate grade of labor employed on this contract shall be $1.00 per hour. The minimum wage paid to all skilled labor employed on this contract shall be $1.50 per hour.

Drawings, specifications and form of bid, contract and bond for the proposed work are on file in the office of the State Highway Department, Trenton, N. J., and may be inspected by prospective bidders during office hours. Plans and supplementary specifications will be furnished upon payment of a fee of FIFTEEN DOLLARS ($15.00) for each set upon application to A. Lee Grover, Chief Clerk, State Highway Department, Room 139, State Highway Office Building, 1035 Parkway Avenue, Trenton, N. J., with a check drawn to the order of the State Highway Department. A charge of $5.00 will be made for supplementary specifications unaccompanied by construction plans. Bids must be made upon the standard proposal forms in the manner designated in the standard State Highway specifications and must be enclosed in sealed special addressed envelopes bearing the name and address of the bidder and work bid upon on the outside, and must be accompanied by the following documents: (1) a certified check drawn to the order of the Treasurer of the State of New Jersey for not less than ten percent (10%) of the amount of the bid, provided that the said certified check shall not be less than $500.00 nor more than $20,000.00; (2) a proposal bond for a sum of not less than fifty percent (50%) of the total price bid for the project; (3) a financial statement (Part 1 of the Prequalification Questionnaire); (4) a plan and equipment statement (Part 3 of the Prequalification Questionnaire); and (5) a Non-collusion Affidavit executed in duplicate; and must be delivered at the above place on or before the hour named. Copies of the standard proposal forms and special addressed envelopes will be furnished on application. Bids not enclosed in sealed special addressed envelopes will be considered informal and will not be opened. The right is reserved to reject any or all bids.

Signed: STATE HIGHWAY DEPARTMENT
A. Lee Grover, Chief Clerk

Bids: September 20, 1955

City of Richmond, Virginia

NOTICE TO BIDDERS

Sealed Proposals will be received at the office of the City Purchasing Agent, 4th floor, Mosque Building, Laurel and Main Streets, Richmond, Virginia, until but not later than 11 o'clock A.M., E.S.T. September 20, 1955; at which time they will be publicly opened and read aloud, for the following work which may be awarded in whole or in part:

DIVISION J—CARY STREET ROAD INTERCEPTING SEWER, PART 2

Location: The sewer is to be constructed in Cary Street Road from Hamilton Street, northwesterly to Maple Avenue, and in Banbury Road from Cary Street Road, southwesterly to Exeter Road, in the City of Richmond, Virginia.

Type of Work: The work comprises the construction of approximately 285 linear feet of 24-inch and 43 linear feet of 18-inch concrete pipe sewer and approximately 1472 linear feet of 30-inch and approximately 7862 linear feet of 36-inch reinforced concrete pipe sewer, complete with manholes, weir and junction chambers, and all other structures, as shown, specified, and directed.

DIVISION K—RIVER ROAD FORCE MAIN

Location: The force main and the water main are to be constructed from the site of the Gambles Mill Road Pumping Station, located on the south side of River Road at Gambles Mill Road, northeasterly in River Road to the intersection of Cary Street Road & Maple Avenue, in the City of Richmond, Virginia, and partly in Henrico County, Virginia.

Type of Work: The work comprises the construction of approximately 4172 linear feet of 24-inch reinforced concrete pipe force main, and approximately 1,999 linear feet of 12-inch and approximately 187 linear feet of 4-inch cast iron water main, complete with all appurtenances, as shown, specified, and directed.

The work to be done is part of the Sewage Disposal Project, and is divided into two Divisions. The Bidder may submit a proposal for either or both Divisions, but not for any port of a Division.

The Proposal and other Contract Documents may be examined at the office of the Director of the Department of Public Works, 217 Governor Street, Richmond, Virginia, and at the office of Greeley and Hansen, Engineers, 220 South State Street, Chicago 4, Illinois. Copies of the Contract Documents may be obtained from the Director or the Engineers upon deposit of Twenty-five Dollars for each set, to be refunded upon the return of such set in good condition within 10 days after the opening of bids.

J. W. HUFFMAN
CITY PURCHASING AGENT

Bids: September 27, 1955

The Mississippi River Bridge Authority
Contract No. 4

INVITATION TO TENDER

The Mississippi River Bridge Authority of the State of Louisiana invites proposals for the construction of the Superstructure of the River Crossing for the Greater New Orleans Bridge over the Mississippi River at New Orleans, Louisiana. Sealed proposals for the Work described will be received by The Mississippi River Bridge Authority in the office of the Authority, 422 City Hall Annex, New Orleans, Louisiana, until 10:00 a.m. Central Standard Time, September 27, 1955. Proposals will not be received after this hour. At 10:00 a.m. of the same day and date, the proposals will be publicly presented, publicly opened and publicly read in the Commission Council Chamber, City Hall.

This Contract No. 4 covers the furnishing of all materials for and the construction of the River Crossing Superstructure of a four-lane highway bridge over the Mississippi River in the vicinity of Thalia Street in New Orleans and Bringier Street in Gretna.

A fuller description of the work to be done and of the requirements, provisions, and details thereof is given in the Contract Drawings, Contract Documents and Specifications, copies of which are on display in the office of the Authority, Room 422, City Hall Annex, New Orleans, Louisiana, and in the offices of the Engineers, Modjeski and Masters, 2400 Canal Street, New Orleans, Louisiana, and State Street Building, Harrisburg, Pennsylvania, or may be obtained from said latter office upon the deposit of Twenty Dollars ($20.00) per set. Deposit checks should be made payable to Modjeski and Masters.

No Proposal will be received unless accompanied by a certified check satisfactory to the Authority drawn upon a National or Louisiana State Bank or Trust Company having an office or place of business in New Orleans, Louisiana, and payable to the order of The Mississippi River Bridge Authority for the sum of Six Hundred Thousand ($600,000.) Dollars as security for the proper execution of the Contract. Such check must not be enclosed in the sealed envelope containing the bid but must be delivered to the office of the Authority. Proper receipt for the deposit will be given by the Authority.

THE MISSISSIPPI RIVER BRIDGE AUTHORITY
Neville Levy, Chairman

Bids: September 13, 1955

The Hydro-Electric Power Commission of Ontario

ST. LAWRENCE POWER PROJECT, POWERHOUSE DRAFT TUBE STEEL PIER NOSINGS AND FOOTINGS"

SEALED TENDERS, in quadruplicate, addressed to the undersigned, 620 University Avenue, Toronto 2, Ontario and clearly marked

"TENDER FOR ST. LAWRENCE POWER PROJECT
POWERHOUSE, DRAFT TUBE STEEL PIER NOSINGS AN FOOTINGS"

will be received up to 4:30 p.m. Eastern Daylight Saving Time on

TUESDAY SEPTEMBER 13, 1955

for the manufacture, fabrication, shop assembly, supply and delivery of 170 tons or 510 tons or 680 tons of steel pier nosings and footings required for the Ontario Hydro powerhouse.

Delivery of 170 tons is required by January 1, 1956, 170 tons by April 1, 1956, 170 tons by August 1, 1956 and 170 tons by December 1, 1956.

Copies of the tendering documents may be obtained on or after August 30, 1955, at the office of the Director of Supply, 620 University Avenue, Toronto 2, Ontario, on payment of $10.00 for each set. This charge will be refunded on reutrn of the documents in good condition.

Tendering documents may be inspected at the above location and at the offices of the following: The Commission's Field Office, Cornwall, Ontario; Power Authority of the State of New York, 270 Broadway, New York 7, New York; and Uhl, Hall & Rich, 230 Congress Street, Boston 10 Massachusetts. The lowest or any tender will not necessarily be accepted.

E. B. EASSON
SECRETARY

OFFICIAL PROPOSALS

Bids: October 3, 1955

Construction of a Sewerage Treatment Plant

ADVERTISEMENT

Notice is hereby given that sealed bids will be received for Section G in accordance with the law by the Puerto Rico Aqueduct and Sewer Authority until 3:00 o'clock P.M. on the third day of October, 1955, at the office of the Authority in Santurce, Puerto Rico, and will then be publicly opened and read.

The work comprises furnishing materials and performing the labor for the construction of the Puerto Nuevo Sewage Treatment Plant, a primary sewage treatment plant with an initial capacity of twenty-four (24) million gallons per day including influent sewer, influent junction chamber, screening chamber, main sewage pumping station, grit chamber, settling tanks, effluent chamber, outfall sewer, sludge pumping station, sludge digestion tanks and digester control building, non-potable water supply system, administration building, garage and shop, outside connecting piping, roadways and paths, grading, miscellaneous structures and appurtenances and the installation of screening, grit handling, settling tank, chlorinating and pumping equipment furnished by others.

Copies of the plans and specifications may be examined without charge at the office of the Puerto Rico Aqueduct and Sewer Authority, Santurce, Puerto Rico, or at the office of Buck, Seifert and Jost, Consulting Engineers, 223 Manuel V. Domenech Street, Hato Rey, Puerto Rico and 112 East 19th Street, New York 3, New York. Copies thereof may be obtained at the office of the Treasurer of the Puerto Rico Aqueduct and Sewer Authority, Stop 26-½, Fernandez Juncos Avenue, Santurce, Puerto Rico or at the office of Buck, Seifert and Jost, Consulting Engineers, 112 East 19th Street, New York 3, New York, upon deposit of cash or certified check payable to the Puerto Rico Aqueduct and Sewer Authority in the amount of One Hundred and Fifty ($150.00) Dollars, which sum will be refunded upon return of the plans and specifications in good condition within twenty (20) days after the date on which bids are received or else the entire deposit will be forfeited.

Bids will be received only from persons who have requested the plans and specifications and made the required deposit therefore under their own names. These documents cannot be obtained later than September 16, 1955.

Each proposal must be accompanied by a certified check or bid bond from a reliable surety company authorized to do business in Puerto Rico and satisfactory to the Authority in amount equal to five (5%) percent of the proposal. The certified checks will be retained to pay for any damage or loss to the Authority or the liability bond will accrue in case the successful bidder shall neglect or refuse to enter into a contract in accordance with his proposal.

The Authority reserves the right to consider bids for thirty (30) days after their receipt before awarding any contract and the right is reserved to waive any informalities, to accept any bid or to reject any or all of them.

PUERTO RICO AQUEDUCT AND SEWER AUTHORITY
by RAFAEL V. URRUTIA
Executive Director
BUCK, SEIFERT AND JOST
Consulting Engineers

Bids: September 15, 1955

New York State Road Work

NOTICE TO CONTRACTORS

STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of Highway Law, sealed proposals will be received until 10:30 A.M., Daylight Saving Time, on September 15, 1955 by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, the Governor Alfred E. Smith State Office Building, Albany, N. Y. for

SOIL EXPLORATIONS AND FOUNDATION INVESTIGATIONS AT VARIOUS SITES ON THE HORACE HARDING EXPRESSWAY, SECTION 1, FROM GRAND CENTRAL PARKWAY TO LAWRENCE ST., QUEENS CO., CITY OF NEW YORK, WHICH CONSTITUTES CONTRACT NO. SPEC. SM-79

Maps, plans and specifications may be examined and obtained at the following offices:

(a) Bureau of Contracts and Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany 1, New York.

(b) Mr. M. E. Goul, District Engineer, 325 West Main Street, Babylon, Long Island, N. Y.

(c) Mr. Charles Schaefer, Department of Public Works, 270 Broadway, New York City.

The deposit for a set of plans, specifications and proposal forms is $5.00. A refund in full will be made to bidders for return of one set in good condition within 30 days of award or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

The Engineer's estimate of cost for this work is $27,725.00.

Proposal for this contract must be submitted in a separate sealed envelope with the name of the contract plainly endorsed on the outside of the envelope. Proposal must be accompanied by draft or certified check, payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum of $1,390.00. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instruction to Bidders".

The right is reserved to reject any or all bids.

J. W. JOHNSON
SUPERINTENDENT OF PUBLIC WORKS

Bids: September 21, 1955

Pennsylvania Turnpike Commission Harrisburg, Pennsylvania

NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 10:00 a. m. Eastern Daylight Saving Time, the 21st day of September 1955, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room #1, North Office Building, State Capitol, Harrisburg, Pennsylvania and publicly opened and read aloud for the following contract:

For the Construction of a Maintenance Building at Turnpike Station 266+84, Bucks County, at the Quakertown Interchange connecting to T. R. 663, Contract No. 560.

The work to be performed under this contract consists of the construction of a Maintenance Building at the Quakertown Interchange, at location on the Turnpike listed above, not including however, the plumbing, heating system, the electrical work, the general site grading, the paving or the seeding and sodding, except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans, specifications and Contract Documents are on file and open to public inspection on 31 August 1955 at the office of the Pennsylvania Turnpike Commission in Harrisburg, Pennsylvania, at the Commission's Field Office in Conshohocken, Pennsylvania, 10th Avenue and Hallowell Street, at the Commission's Field Office in Lehighton, Blakeslee Boulevard, Lehighton, Pennsylvania and the Commission's Field Office in Quakertown, Route 663, Quakertown, Pennsylvania. Plans, specifications and other contract documents will not be available before this date for mailing to prospective bidders.

Plans and contract documents may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set. No refund will be made for plans returned, unless the project is withdrawn from letting by the Pennsylvania Turnpike Commission.

Remittances are payable by check or P. O. money order to the Pennsylvania Turnpike Commission and must accompany requests for drawings, specifications and contract documents.

Copies of Specifications for grading, drainage, paving and structures may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per copy.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer
Harrisburg, Pennsylvania
22 August 1955

Bids: October 11, 1955

Wesley E. Seale Dam Project Near Corpus Christi, Texas

NOTICE TO BIDDERS

Sealed bids, in duplicate, will be received by the Lower Nueces River Water Supply District, at 211 Weber Building, Corpus Christi, Texas, until 1:30 P.M., C.S.T., Tuesday, October 11, 1955, and all bids will be publicly opened and read at 2:00 P.M., on that date, at the Corpus Christi Chamber of Commerce Office, 1201 N. Shoreline Drive, Corpus Christi, Texas, for constructing the

WESLEY E. SEALE DAM PROJECT ON THE NUECES RIVER, FIVE MILES SOUTH OF MATHIS, TEXAS.

The project consists of two Ambursen type reinforced concrete slab-and-buttress spillways 60 feet high, approximately 1346 feet and 1560 feet long, respectively; three sections of rolled fill dam approximately 2200 feet, 500 feet, and 400 feet long, respectively; an outlet structure and appurtenant works; and a field office building. The following approximate quantities are required for the principal items:

Stripping	75,000 cu. yds.
Core Trench Excavation	46,000 cu. yds.
General Excavation	146,000 cu. yds.
Trenching, and Finishing Excavation	30,000 cu. yds.
Backfill	14,000 cu. yds.
Embankments, Rolled Fill	787,000 cu. yds.
Embankments, Unclassified	110,000 cu. yds.
Topsoil	4,000 cu. yds.
Reinforced Concrete in Foundation Floors, Mats, and Paving	40,000 cu. yds.
Reinforced Concrete in Buttresses, Piers, Deck Slabs, Abutments and Structures	47,000 cu. yds.
Gravel Fill	31,000 cu. yds.
Riprap	26,000 cu. yds.
Rockfill	2,000 cu. yds.
Road Surfacing	12,000 sq. yds.
Steel Sheet Piling	5,650 tons
Reinforcing Steel	5,910 tons
Automatic Steel Crest Gates 9' x 37'	60 gates
Intake Tower, Complete with Valve & Sluice Gates	1 complete
Field Office Building -26' x 50' x 8'	1 complete

The plans, specifications, and bidding documents may be secured from the office of the general Manager, Lower Nueces River Water Supply District, 211 Weber Building, Corpus Christi, Texas; or from Reagan & McCaughan, 320 Wilson Building, Corpus Christi, Texas; or from Ambursen Engineering Corporation, 295 Madison Avenue, New York 17, or 603 Rosalie Avenue, Houston 6, Texas. A deposit of $100.00 is required for each set of plans and specifications. Upon return of plans and specifications in good condition within fifteen days after date of bidding to the Lower Nueces River Water Supply District, 211 Weber Building, Corpus Christi, Texas, the full deposit will be refunded to bona fide bidders and 50% to non bidders.

Bids must be made on the standard proposal form, in duplicate, and must be accompanied by a bid security in a total amount not less than 5% of the total maximum bid price. Of this bid security, it is mandatory under the Texas laws governing the District that a sum equalling not less than 1% of the total amount of the bid must be in the form of a certified check payable to the order of the Lower Nueces River Water Supply District. The remainder of the security may be in the form of a certified check or, at the option of the bidder, a bidder's bond. The District reserves the right to reject any and all bids, or to accept any bid deemed advantageous to it.

No bidder may withdraw his bid within 45 days after the opening thereof.

The successful bidder will be required to be bonded to the District in a sum equal to 100% of the amount of his proposal.

The bidder is hereby notified that the specifications contain the general prevailing wage scale and the Contractor shall not pay less than the wage rates so shown.

Dated this 2nd day of August 1955.

LOWER NUECES RIVER WATER SUPPLY DISTRICT
GUY I. WARREN
President
CHARLES GALLAND
Secretary

OFFICIAL PROPOSALS

Bids: September 20, 1955

City of Richmond, Virginia

NOTICE TO BIDDERS

Sealed Proposals will be received at the office of the City Purchasing Agent, 4th floor, Mosque Building, Laurel and Main Streets, Richmond, Virginia, until but not later than 11 o'clock A.M., E.S.T. September 20, 1955; at which time they will be publicly opened and read aloud, for the following work which may be awarded in whole or in part:

Notice to Bidders

Location: The equipment to be furnished shall be delivered to site of the Gambles Mill Road Pumping Station south of and adjacent to River Road at Gambles Mill Road near the westerly city limits of the City of Richmond, Virginia.

Type of Work: The equipment to be furnished is part of the West End portion of the Richmond Sewage Disposal Project and comprises the following:

Three (3) motor-driven vertical sewage pumps of 1.5, 3.0 and 6.0 mgd capacities at heads of 180 and 185 feet.

One (1) gasoline engine-driven vertical sewage pump of 6.0 mgd capacity at 185 feet head.

The Proposal and other Contract Documents may be examined at the office of the Director of the Department of Public Works, 217 Governor Street, Richmond, Virginia, and at the office of Greeley and Hansen, Engineers, 220 South State Street, Chicago 4, Illinois. Copies of the Contract Documents may be obtained from the Director or the Engineers upon deposit of Twenty-five Dollars for each set, to be refunded upon the return of such set in good condition within 10 days after the opening of bids.

J. W. HUFFMAN
CITY PURCHASING AGENT

Bids: September 21, 1955

Pennsylvania Turnpike Commission
Harrisburg, Pennsylvania

NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 10:00 a. m. Eastern Daylight Saving Time, the 21st day of September 1955, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room #1, North Office Building, State Capitol, Harrisburg, Pennsylvania and publicly opened and read aloud for the following contract:

For the Construction of Electrical System for the Quakertown Maintenance Building at Turnpike Station 266+84, Bucks County, Contract No. 560-C.

The work to be performed under this contract is generally in and around the Maintenance Building at the Quakertown Interchange. The work does not include the Electrical System, the Plumbing System nor building construction except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans, specifications and Contract Documents are on file and open to public inspection on 31 August 1955 at the office of the Pennsylvania Turnpike Commission in Harrisburg, Pennsylvania, at the Commission's Field Office in Conshohocken, Pennsylvania, 10th Avenue and Hallowell Street, at the Commission's Field Office in Lehighton, Blakeslee Boulevard, Lehighton, Pennsylvania and the Commission's Field Office in Quakertown, Route 663, Quakertown, Pennsylvania. Plans, specifications and other contract documents will not be available before this date for mailing to prospective bidders.

Plans and contract documents may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set. No refund will be made for plans returned, unless the project is withdrawn from letting by the Pennsylvania Turnpike Commission.

Remittances are payable by check or P. O. money order to the Pennsylvania Turnpike Commission and must accompany requests for drawings, specifications and contract documents.

Copies of Specifications for grading, drainage, paving and structures may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per copy.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
22 August 1955

OFFICIAL PROPOSALS

Bids: September 21, 1955

Pennsylvania Turnpike Commission
Harrisburg, Pennsylvania

NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 10:00 a. m. Eastern Daylight Saving Time, the 21st day of September 1955, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room #1, North Office Building, State Capitol, Harrisburg, Pennsylvania and publicly opened and read aloud for the following contract:

For the Construction of Plumbing System for the Quakertown Maintenance Building at Turnpike Station 266+84, Bucks County, Contract No. 560-A.

The work to be performed under this contract is generally in and around the Maintenance Building at the Quakertown Interchange. The work does not include the Electrical System, the Heating System nor building construction except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans, specifications and Contract Documents are on file and open to public inspection on 31 August 1955 at the office of the Pennsylvania Turnpike Commission in Harrisburg, Pennsylvania, at the Commission's Field Office in Conshohocken, Pennsylvania, 10th Avenue and Hallowell Street, at the Commission's Field Office in Lehighton, Blakeslee Boulevard, Lehighton, Pennsylvania and the Commission's Field Office in Quakertown, Route 663, Quakertown, Pennsylvania. Plans, specifications and other contract documents will not be available before this date for mailing to prospective bidders.

Plans and contract documents may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set. No refund will be made for plans returned, unless the project is withdrawn from letting by the Pennsylvania Turnpike Commission.

Remittances are payable by check or P. O. money order to the Pennsylvania Turnpike Commission and must accompany requests for drawings, specifications and contract documents.

Copies of Specifications for grading, drainage, paving and structures may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per copy.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
22 August 1955

U. S. Government

DEPARTMENT OF ARMY, CORPS OF ENGINEERS. Sealed bids will be received on 11 October 1955 for the widening of the west three miles of the Calumet-Sag Channel. The work involves the widening of existing 60 foot channel to a width of 225 feet. The approximate quantities are as follows: Common Excavation 2,015,000 cu. yd.; Rock Excavation 1,147,000 cu. yd.; Dumped Riprap 50,000 cu. yd. Plans and specifications may be obtained without deposit from Chicago District Office, Corps of Engineers, U.S. Army Room 475 Merchandise Mart, Chicago, Ill.

U. S. Government

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Invitation No. DS-4512) will be received at Denver, Colorado, until October 25, 1955, for furnishing two 3,500-horsepower, 360-rpm, vertical-shaft, hydraulic turbines; two governors for regulating the speed of the 3,500-horsepower turbines; and two 2,750-kva, 2,400-volt, 3-phase, 60-cycle, vertical-shaft, alternating-current generators for Deer Creek Power Plant, Provo River Project, Utah. Delivery is desired within 480 days. For particulars, address Bureau of Reclamation, Building 53, Denver Federal Center, Denver 2, Colorado. W. A. Dexheimer, Commissioner.

Sealed bids for remodeling Building No. 9, National Institutes of Health, Bethesda, Md., will be received until 1:00 PM EST., Sept. 30, 1955 in Rm. 5333 General Services Bldg., 19th & F Sts., N. W., Washington, D. C., and then publicly opened in Rm. 1304. Bidding material may be obtained from Rm. 1304 General Services Bldg., 19th & F Sts., N. W., Washington, D. C., EX.3-4900, Extn. 2397. P. A. Strobel, Commissioner of Public Buildings, General Services Administration.

SEARCHLIGHT SECTION

This index is published as a convenience to the reader. Every care is taken to make it accurate but SEARCHLIGHT SECTION assumes no responsibility for errors or omissions.

Aberthaw Co. 92
A. C. R. Co. 92
Albert Pipe Supply Co., Inc. 91
Ambursen Dam Co., Inc. 91
Anderson Equipment Co. 92

Boehck Engineering Co., Inc. 92
Boehrs Equipment Co., Gil. 91, 92
Buff 94

Cole, Rett 92
Contractors Machinery Co. 91, 93
Cooney, G. A. 90

Darien 90
Deatherage & Son Co. 90
Drachman Steel Corp. 93

Equipment Corp. of America 91

Fehrs Tractor & Equipment Co. 93
Forsythe Equipment Co., Inc. 91
Foster Co., L. B. 93
Frank, M. K. 93

Garrison Spillway Constructors 92
Gillis & Co. 93
Great Atlantic Iron & Steel Corp. 90
Greenheart (Demerara) Inc. 93
Greenpoint Iron & Pipe Co. 91
Greensburg Machine Co. 91

Hetz Constructors, Inc. 90
Hickerson, Roy D. 94
Huber Corp., J. M. 93

Johnson Construction Co. 93

Lestan Corp. 93
Lubrecht, III, Wm. 90

Meriwether, George M. 92
Midwest Steel Corp. 93
Mississipi Valley Equiment Co. 91, 93
Morrison Railway Supply Co. 93

National Blue Print Co. 94
North Jersey Equipment Co. 92

O'Neill, A. J. 92

Pfotzer Inc., E. & E. J. 90

Queensboro Steel Corp. 90

Schoonmaker Co., Inc., A. G. 91
Shasta Coal Corp. 92
Sherman Crane & Service Inc., Roger 92
Smith Inc., L. B. 92
Syracuse Supply Co. 90

Tamblyn System 90
Transit Sales & Service Inc. 92

Universal Wire & Cable Co. 92

Vulcan Iron Works 92

Warren, Knight Co. 94
Weiss Co., B. M. 91
Williams Construction Co. 92
Wilson Engineering Co. 90
Wyoming Valley Equipment 91

FOREIGN AIRBASE PROJECT
IMMEDIATE OPENINGS FOR
DESIGN ENGINEERS & ESTIMATORS

Must have degree plus minimum 6 years A-E experience. Single status, 1 year contract renewable.

P-7506, Engineering News-Record
330 W. 42nd St., New York 36, N. Y.

EMPLOYMENT OPPORTUNITIES

The Advertisements in this section include all employment opportunities—executive, management, technical, selling, office, skilled, manual, etc.

Positions Vacant | **Civil Service Opportunities . . .** | **Employment Agencies**
Positions Wanted | **Selling Opportunities Wanted** | **Employment Services**
Part Time Work | **Selling Opportunities Offered** | **Labor Bureaus**

DISPLAYED —RATES— **UNDISPLAYED**

The advertising rate is $24.25 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.
An advertising inch is measured ⅞" vertically on a column—3 columns—30 inches to a page.
Subject to Agency Commission.

$1.80 per line, minimum 3 lines. To figure advance payment count 5 average words as a line.
Box Numbers—counts as 1 line.
Discount of 10% if full payment is made in advance for 4 consecutive insertions.
Not subject to Agency Commission.

Send NEW ADS to ENGINEERING NEWS RECORD, 330 W. 42nd St., N. Y. 36, N. Y. for September 22nd issue closing September 12th.

Architects
and/or
Architectural Draftsmen

Overseas employment opportunities in West Indies. Will be required to perform architectural design and/or drafting duties pertaining to construction of commercial type office buildings. Work assignments may also include industrial buildings and residences. Job duration 6-12 months.

Traveling expenses and liberal salaries paid.

Write giving age, marital status, education and details of previous experience.

BOX 308-W
RADIO CITY STATION
NEW YORK, NEW YORK

CHIEF COST ESTIMATOR FOR MADRID, SPAIN

Must be qualified in all phases of engineering and building construction costs. Prefer man who is competent cost estimator himself, has supervisory experience with group of estimators, and with administrative record for getting large number of cost estimates prepared simultaneously. Highly satisfactory background would come from work as Chief Estimator for Architect Engineer firm doing work for Air Force, Navy or Corps of Engineers.
No U. S. Taxes deducted. Family accommodations available. Resumes for consideration must indicate past earnings and salary requirements. Send replies to:

PERSONNEL MANAGER
A.E.S.B.
250 Hudson St., N. Y. 13, N. Y.

Opportunity for
ARCHITECTURAL STRUCTURAL MECHANICAL and CHEMICAL ENGINEERS

with Record of Ingenuity and Originality in Research and Development of Quality Metal and Plastic Building Components.

Very large, progressive manufacturer in middle western city, who is establishing a new general research and development division, solicits applications for employment from persons qualified by training and experience for this work.

Send complete record of age, training, experience, employment and salary desired with first letter. All applications held strictly confidential and will be acknowledged promptly.

Write To:

P-7320, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

Chemical And Petroleum Specialist
AS
Product Applications Engineer

Kaiser Aluminum—one of the nation's three largest fully integrated producers of aluminum—offers product applications position for well-qualified engineer with chemical and petroleum background. An intimate knowledge of the chemical and petroleum industries is required.
The product applications engineer will promote the development of new applications for aluminum in the chemical and petroleum industries. Involves travel on a national basis to contact key personnel in the chemical and petroleum industries. Will be located at national headquarters, Chicago.
Salary commensurate with experience. Please submit personal resume describing previous experience and indicating present and required salary to:

R. E. BANKERT
Kaiser Aluminum & Chemical Sales, Inc.
919 North Michigan Avenue
Chicago 11, Illinois

STRUCTURAL ENGINEERS

Having experience with heavy material handling equipment
Permanent Position For Qualified Men
HOSPITALIZATION
INSURANCE
VACATION
Phone or Write
Chief Engineer for interview

THE WELLMAN ENGINEERING CO.

7000 CENTRAL AVE.
Cleveland 4, Ohio
Telephone EN 1-0842

Don't forget the
BOX NUMBER

When answering the classified advertisements in this magazine don't forget to put the box number on your envelope. It is our only means of identifying the advertisement you are answering.

REFINERY
CONSTRUCTION SUPERINTENDENT
WANTED
Submit experience record and photograph
California Location
P-7552, Engineering News-Record
1111 Wilshire Blvd., Los Angeles 17, Calif.

DESIGN ENGINEERS

PERMANENT OPPORTUNITIES
AT OUR

Cleveland, Ohio, offices with an engineering firm having over 50 years of successful operation doing business all over the world.

The McKEE organization continues to grow and expand and continues to offer many permanent present and future opportunities for qualified, experienced ENGINEERS and DESIGNERS in the following fields:

—STRUCTURAL STEEL
—CONCRETE
—ELECTRICAL
—HEAVY MACHINERY
—PIPING
—PROCESS HEATERS
—EQUIPMENT SPECS
—ARCHITECTURAL
—MECHANICAL
and
—ELECTRICAL DRAFTSMEN
—PIPING DRAFTSMEN

Applicants should have at least 5 years of good design experience in any of the above fields, applicable to heavy construction as described below—

McKEE designs and constructs Blast Furnaces, Open Hearth Furnaces, Sintering Plants and Auxiliary Facilities; Oil Refineries, Chemical and Petro-Chemical Plants and Atomic Energy, Aluminum, Industrial and Other Non-Ferrous Metal Plants; All of these afford a wide diversification of opportunities to energetic and qualified engineers.

HERE IS AN OPPORTUNITY FOR YOU TO UTILIZE YOUR ABILITIES AND TALENTS AS A DESIGN ENGINEER

McKEE offers top compensation commensurate with experience and ability. No age limitations.

In addition to good earnings, permanency and opportunities, McKEE offers a pension program to qualified persons. Liberal vacation and sick leave, insurance. Promotion from within the organization. Transportation and moving allowances; an excellent job evaluation and merit-rating program as well as the best in working conditions in air conditioned offices.

Please Send Resume To:

Edward A. Kolner
ARTHUR G. McKEE & CO.
2300 Chester Avenue
CLEVELAND, 1, OHIO

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

Construction Foreman for firm engaged in extensive sewer, water main and treatment plant facilities. Permanent position in N. Y. State area. Only qualified applicants with broad experience. P-6595, Engineering News-Record.

Wanted: Instructor in engineering drawing and descriptive geometry. Salary $3600 for 9 month period. Dept. of Engr. Drawing, University of North Dakota, Grand Forks, North Dakota.

Estimator for building construction firm with main office in Boston. Must have engineering background and experience in this type of work. Permanent position for qualified applicant. Salary open. Write Beacon Construction Company, 102 Hano Street, Allston 34, Massachusetts.

POSITIONS VACANT

Engineers experienced in water and sewage works projects or related fields. Opportunity for permanent connection with long established consulting firm. Please state full qualifications, experience, references and salary requirements. Location Ohio. P-7504, Engineering News-Record.

Architect or Engineer—Experienced graduate to supervise school construction for architectural firm. Either resident position or one with considerable travelling in connection with several projects. Throughout Michigan or within 100 mile radius surrounding Chicago. Salary dependent upon qualifications. Give summary of education and experience, with salary expected. P-7500, Engineering News-Record.

Paper Mill Construction Superintendent — Either foreign or domestic projects. Must have 20 years experience in all phases of paper mill construction including foundations, buildings, equipment setting, boilers, conveyors, piping and instrumentation. Must have proven administrative ability to coordinate all crafts. Reply should include full resume, age, assignment preference and salary required. P-7509, Engineering News-Record.

General Construction Superintendent — For foreign and domestic assignment. Should have 15 years experience heavy industrial building construction. Engineering background preferred. Must have strong references demonstrating extensive administrative ability and capacity to handly all phases of a project. Reply giving age, complete resume and salary required. P-7510, Engineering News-Record.

Cost Engineering for Boston Building Contractor. Must be capable of processing job cost reports complete. Send resume education, experience and salary requirements. P-7527, Engineering News-Record.

Chief Estimator and assistant to the manager for young, expanding building contractor operating throughout the U. S. This is an unusual opportunity for an experienced construction engineer with proven ability to permanently associate with growing organization. Write full details of experience, personal information, references and salary requirements to Blount Brothers Construction Co. P. O. Box 949, Montgomery, Alabama.

Engineer with estimating and management experience for general contractors office doing industrial and public works building. Excellent opportunity. State age, experience and references. Our employees know of this ad. Midwest location. P-7492, Engineering News-Record.

Engineer qualified to teach structural design. Full or part-time. Rank and salary open. C. E. Dept., Manhattan College, N. Y. 71, N. Y.

Wanted—Open pit mining engineer for manganese mining in Virginia area. Write full qualifications, age and salary, to Mining Contractors, Inc., Box 790, Cedar Rapids, Iowa.

Needed immediately experienced structural engineer permanent position with progressive established engineering firm. Salary open. Write complete details education & experience to H. J. Ross Associates, 3047 Biscayne Blvd., Miami, Fla.

Engineer—Estimator, foreman, for sewer, water and roadwork. Must be top man, willing to work hard. The Forest Company, 121 North Main St., Wharton, N. J. Phone Dover 6-2320.

Estimator; Experienced in taking-off quantities for public buildings, industrial and commercial construction. Permanent position with General Contractor located in Ohio. Write, fully stating experience, education and salary expected. All replies confidential. P-7483, Engineering News-Record.

Building Construction Superintendent wanted by Boston Building Contractor for large Public Building Supervision in New England. Send complete details, salary requirements, and when available. P-7526, Engineering News-Record.

Civil Engineer—For asst. city engineer position. Must be P.E. with experience in construction and design. Civil Service tenure. Salary $645 to $724 per mo. Max. age 50. For details write to Civil Service Office, City Hall, Dearborn, Mich.

POSITIONS VACANT

Superintendents and Foremen for firm utilizing all types of construction equipment. Must have extensive mechanical experience, proven ability to supervise operators and mechanics. Permanent locations, good starting salary and opportunity for advancement. Send complete details of background, experience and salary requirements to: Box P-7624, Engineering News-Record.

Bridge designers and draftsmen wanted. State education, experience, and salary desired in reply. T. B. Gunter, Jr., Bridge Engineer, State Highway and Public Works Commission, Raleigh, North Carolina.

Graduate Engineer versed in concrete mix design, selling and marketing experience for foreign service. French or Spanish essential. Box P-7609, Engineering News-Record.

Estimator—Engineering graduate with several years experience in estimating costs of oil refineries and chemical plants for contractor in Chicago area. Submit complete resume and photograph indicating education, experience and salary requirement. Box P-7614, Engineering News-Record, 330 W. 42nd Street, New York 36, N. Y.

Highway and Bridge designers and draftsmen. Positions open for men experienced in the design of highways and bridges. Long established Pennsylvania firm. Steady program of work. Usual employee benefits. Please submit information concerning education, complete experience, references, salary requirements, and availability. P-7615, Engineering News-Record.

Engineer—Superintendent for concrete paving on roads, airports, etc. Must be graduate engineer between 30-40 years old who has been actively engaged in actually doing this type of work for at least the last five years in this capacity. This is a permanent position with a substantial company in New York State. This opening has a real future for the right man. Salary open. Box P-7558, Engineering News-Record.

See our Field Construction Manager Ad on Page 88 of this issue, P-7602

Wanted: Soil Boring Foreman with experience in Gow Method of boring and Shelby tube sampling. New firm in mid-west offers future for right person. Send application stating experience record, present employer, starting salary required, in application letter. P-7589, Engineering News-Record.

EMPLOYMENT AGENCIES

Wanted Engineers, Designers, Draftsmen-Structural, Architectural, M.E., C.E., E.E., and Ind., also Teachers and Chemists, Cleveland Engineering Agency, 2132 E. 9, Cleveland.

POSITIONS WANTED

Construction Engineer, graduated with over 20 years experience as resident manager, cost and office engineer on domestic and overseas jobs. Very reliable. Knowledge of foreign languages. Capable of administration, planning and cost control. Just completed overseas assignment in Pacific. Write to PW-7418, Engineering News-Record, 68 Post Street, San Francisco 4, California.

Controller Office Mgr.—12 yrs. experience engineering & construction accounting. Top administrator all financial & accounting functions. Resume on request. Go anywhere. PW-7496, Engineering News-Record.

Engineer, 40 yrs. exp. preparation of contractors' claims for extra work, change orders. Heavy construction, buildings. PW-7482, Engineering News-Record.

Construction Supt. or Project Manager, aged 46, graduate civil engineer, 18 years experience in diversified construction of Super Highway, bridges, air force bases and PWA housing projects, in Maryland, Penn, Ohio and Indiana. Just completed three and one-half million dual lane highway for state of Maryland, good organizer, have efficient following with exceptional clean record of accomplishments, will go anywhere, available at once. PW-7535, Engineering News-Record.

Superintendent-Administrative: 20 yrs highway, airports, dams. Phone Los Angeles, ATlantic 67843 or Box No PW-7576, Engineering News-Record.

Registered Professional engineer and construction superintendent, twenty years experience, desires position. Available September first. PW-7366, Engineering News-Record.

Experienced Surveying Crew available with equipment. D. G. Hollister, Old Forge, N. Y.

—DESIGN ENGINEERS—

Permanent Positions in Atlanta Georgia for Qualified

Chemical Plant Design Engineers

Bridge & Highway Design Engineers

Applicants should have at least 10 years responsible design experience in either of the above fields and capable of checking and directing the work of others. Salaries commensurate with education and specific experience.

Reply in full, giving particulars concerning salary, education, experience, personal history and availability.

PATCHEN AND ZIMMERMAN
Engineers
120 SPRING STREET
ATLANTA, GEORGIA

FIELD CONSTRUCTION MANAGER

A long-established, growing commercial and industrial building construction firm in Iowa has an opening for a man qualified to direct the field operations of the company. This is one of the top opportunities in the contracting field for a man who is interested in building himself a secure position with a leading organization at a commensurate level of compensation. Only men who are qualified to administer a large operation need apply. Salary is open. Reply in writing, giving full details of experience, education, personal background and salary desires to

P-7602, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

ASS'T QUARRY SUPERINTENDENT

Well established Middle Western company needs man with minimum of five years experience to assist superintendent in operation of large quarry. Prefer mechanical or civil engineer, or equivalent who has had some supervisory experience. Age 35 to 45. Fine opportunity for advancement. Good salary and outstanding benefits. Please reply giving personal, educational and work history, and salary requirements.

P-7593, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

ENGINEERS — DESIGNERS

Chemical - Mechanical - Electrical - Structural - Piping

San Francisco assignment

Recent design experience on petroleum refineries, chemical plants, or related projects. Compensation commensurate with ability. Liberal moving allowances.

Please write furnishing complete chronological experience record and salary history, also full details regarding education, salary desired, businesss and character references.

BECHTEL CORPORATION
220 Bush Street — San Francisco 4, Calif.

DIRECTOR OF PURCHASES

Large, progressive company located in Chicago area, associated with construction and building industry is seeking top executive to handle and direct all activities in purchasing organization. Prefer M.E. or C.E. age 35 to 45, having minimum of ten years experience in off-the-road, mineral dressing and heavy construction equipment. Excellent opportunity for growth and advancement. Salary commensurate with ability. Unique profit sharing and bonus. Other benefits. Write giving work history, personal and academic background.

P-7595, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

HIGHWAYS ENGINEERS

A rapidly expanding organization devoted exclusively to highway engineering has openings at all levels for men experienced in the design of highways, freeways, expressways and associated work.

Work is in air-conditioned St. Louis office on long-term projects, with ample opportunity for professional development and advancement.

Assistance with moving expenses, excellent employee benefit and retirement plan, Blue Cross, paid vacations and holidays and sick leave.

Please send complete experience record, references, date available and salary desired in first letter.

SVERDRUP & PARCEL ENGINEERING COMPANY
1134 Locust St. St. Louis 1, Mo.

ENGINEERS

HIGHWAYS AND BRIDGES

Designers
Draftsmen
Office Engineers
Maintenance Engineers
Project Engineers
Location Engineers
Soils & Materials Engineers

FIELD SURVEY PERSONNEL

Party Chiefs
Instrumentman
Chainmen

OTHER PERSONNEL

Hydrologist
Equipment Supervisor
Master Mechanic

Domestic and Overseas Assignments
Knowledge of Foreign language necessary in some classifications.

Write giving full particulars concerning education, experience, personal history and availability to:

Richard L. Shaw
Personnel Director
Michael Baker, Jr., Inc.
Consulting Engineers
Baker Building — Rochester, Penna.

3 STRUCTURAL DETAILERS

Permanent jobs for men with at least 3 yrs. experience with structural steel fabricators. Technical education not required. Apply by letter giving resume of experience and salary expected.

1 CHIEF DRAFTSMAN-CHECKER WITH SQUAD BOSS EXPERIENCE

Non-Deductible Insurance
Family Health Plan
Profit Sharing Plan

Fort Wayne Structural Steel Co.
4020 Northrop St. — Fort Wayne, Ind.

ENGINEERS

Recent (1954-1955) engineering M.E., C.E., or mining graduates to train and work on variety of stimulating assignments in industry producing building materials. Eventual responsibility for all phases of work from layout and design to tryout. Will work both in the field and inside. Excellent prospects for growth and future attainment of administrative position. Work location Lyons, Ill. Unusual profit sharing plan and other benefits. Please write giving work history, personal and academic background.

P-7597, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

STRUCTURAL STEEL DETAILERS AND CHECKERS

Top rates for exp. men, long program, overtime, vacation, holidays.

SAMUEL LICHTENBERG
STRUCTURAL ENGINEER
113 West 42nd St. — New York 36, N. Y.

When Answering
BOX NUMBERS . . .

to expedite the handling of your correspondence and avoid confusion, please do not address a single reply to more than one individual box number. Be sure to address separate replies for each advertisement.

CLASSIFIED SEARCHLIGHT SECTION ADVERTISING

BUSINESS OPPORTUNITIES — EQUIPMENT - USED or RESALE

UNDISPLAYED RATE:

$1.80 a line, minimum 3 lines. To figure advance payment count 5 average words as a line.

PROPOSALS $1.80 a line an insertion.

BOX NUMBERS count as one line additional in undisplayed ads.

DISCOUNT of 10% if full payment is made in advance for four consecutive insertions of undisplayed ads (not including proposals).

DISPLAYED RATE:

The advertising rate is $20.50 per inch for all advertising appearing on other than a contract basis. Contract rates quoted on request.

AN ADVERTISING INCH is measured ⅞ inch vertically on one column, 3 columns—30 inches—to a page.

EQUIPMENT WANTED or FOR SALE ADVERTISEMENTS acceptable only in Displayed Style.

Send NEW ADVERTISEMENTS to N. Y. Office, 330 W. 42nd St., N. Y., 36, N. Y. for Sept. 22nd issue closing Sept. 12th.

IMMEDIATE DELIVERY

STRUCTURAL STEEL

ESPECIALLY HEAVY BEAMS

Excellent Condition for RE-USE

LARGE STOCK—USED STRUCTURAL SHAPES

AT TREMENDOUS SAVINGS

ONLY 5 MORE
TRENCH PUMPS
WITH 40 H.P. MOTORS A.C.
Priced Low Enough to use for parts.

WRITE for our LATEST STOCK LISTINGS

GREAT ATLANTIC IRON & STEEL CORPORATION

15 WARREN ST. JERSEY CITY, N. J. *N.Y. Phone BA. 7-5616 N.J. Phone HE. 4-5743*

ESTIMATORS Pocket-Size 150 tables proven thousands of them use labor hours, material quantities for rapid unit-cost calculation. "BUILDING LABOR CALCULATOR" postpaid $10.00 with order. Thirty sixth year. Ten days free trial money back guarantee. TAMBLYN SYSTEM, 1420 Gilpin Street, Denver 18, Colorado.

Engineers—Foremen—Office Men

Learn latest methods to organize and run work. Prepare for the top jobs.
Send post card for details.

GEO. E. DEATHERAGE & SON CONSTRUCTION CONSULTANTS
P.O. Box 921 Lake Worth, Florida

All Equipment Listed Below In First Class Condition

CONSTRUCTION EQUIPMENT		SELLING PRICE
D8 Caterpillar Tractor		$3,500.00
HD 20 Allis Chalmers Tractor		8,500.00
HD 14 Allis Chalmers Tractor		3,500.00
HD 7 Allis Chalmers Tractor		2,800.00
1954 Ferguson Tractor and Pippen Backhoe		3,800.00
Bucyrus Erie Scraper		2,500.00
1949 Ford F600 Dump Truck		1,100.00
1950 Chevrolet 6100 Dump Truck		1,100.00
TRACTORS AND TRAILERS		
Ward La France Tractor	(1951)	$3,500.00
902 G.M.C. Tractor	(1954)	5,000.00
Gindy Trailer	(1955)	5,300.00
Gardner Hay Trailer		500.00
COMPLETELY REBUILT ENGINES (DIESEL)		
N. H. CUMMINS	(200)	$3,400.00
HRB CUMMINS	(165)	2,100.00
G.M.C.	(471)	1,600.00
G.M.C.	(671)	2,400.00

TERMS: 40% CASH ON DELIVERY
12 MONTHS AT 6% INTEREST

FS-7623, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

FOR SALE

1—Bay City Model 65 (1¼ yard) Crawler Shovel Crane Serial No. 5037. Cummings—H-6 Diesel power. Equipped with two shovel fronts and 70-foot boom. Excellent condition. **Price $16,000.**

1—P & H Model 855 Crawler Shovel Crane. Serial No. 10984. Powered by GM 671 Diesel. Equipped with shovel front and 90-foot boom. Excellent condition. **Price $27,000.00.**

1—Lorain Model 820 Crawler Crane. Serial No. 18221. Powered by Caterpillar D 13000 Engine and 90-foot boom. Excellent condition. **Price $26,000.00.**

The above equipment is available and ready to work immediately.

E. & E. J. PFOTZER, Inc.
P. O. Box 126 Wilmington, Delaware

STRUCTURAL ENGINEERING
ARCHITECTURAL ENGINEERING
OUR COURSES of instruction by mail HAVE HELPED THOUSANDS to better positions and to pass State Board Examinations. Forty third year.
WILSON *Engineering Corp*
Fellows House Offices HARVARD SQ. CAMBRIDGE MASS.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

BUSINESS OPPORTUNITIES

Practicing Engineer desires to purchase substantial interest in a Florida Engineering and Surveying Corporation. Address BO-7464, Engineering News-Record.

Gunite-Sandblasting Contractor, well rated, due to illness desires responsibile associate; will combine or sell; modern equipment and complete personnel; profitable work in progress and established contacts; Ohio Location, BO-7625, Engineering News-Record.

Civil Engineering and Surveying business, firmly established. Located Florida West Coast metropolitan area. Grossing approximately $100,000 annually, can be tripled. Excellent location; commodious offices. Investment will pay out of earnings in three years. Qualified persons please contact BO-7463, Engineering News-Record.

FOR SALE
PUMPCRETE

Like New, Perfect Condition Rex 200D, Complete, Gas Powered—600'-8" Pipe, Spare Parts—Ready for Immediate Work.

G. A. COONEY
2128 Hudson Chicago 14, Ill.
Financial 6-0456

MODERN EQUIPMENT FOR RENT

American Truck Crane 25 Ton Cap. 90 foot boom, new 1953.
Ingersoll Rand 315 cu. ft. Gyro Flow Air Compressor.
5 Lincoln Welders 300 amp. driven by 230 V. D.C. Current.
1 Westinghouse 300 amp. driven by 220 V-25 cy. A.C. Current.
7 Clipper Brick Saws. 220 V. A.C.—25 cy.
2 Air Tuggers, Ingersoll Rand Eul.
Together with all other miscellaneous hand tools, supplies customary for field erection crews. Write for particulars.

HETZ CONSTRUCTORS, INC.
P. O. Box 671 Warren, Ohio
Ph. Niles, Ohio OL 2-6688

D ROADSTERS

One 1954 LeTourneau D Roadster with sideboards, GMC engine, cab and special filters. The very latest machine in very excellent condition. Price $11,000.

SYRACUSE SUPPLY CO.
394 Ainsley Drive Syracuse, N. Y.
Phone 4-3157

WANTED

FOR SALE
BUCYRUS-ERIE DRAGLINE
Model 9W with 200' boom, 8 cu. yd. bucket.

WILLIAM LUBRECHT, III
Construction Equipment
311 W. Diamond Ave. - Hazleton, Pa.
Phone: Gladstone 5-4041 or 5-0253

WANTED
Alamo Rotary Bar Bender
1½" Round Capacity
10 H. P. AC 3 phase 60 cycle motor
Queensboro Steel Corporation
P. O. BOX 1376
Wilmington, North Carolina.

Your Inquiries to Advertisers Will Have Special Value . . .

—for you—the advertiser—and the publisher, if you mention this publication. Advertisers value highly this evidence of the publication you read. Satisfied advertisers enable the publishers to secure more advertisers and—more advertisers mean more information on more products or better service—more value—to YOU.

FOR SALE or RENT

25 ton American Stiffleg Model 846.
160 HP Caterpillar D17000 Diesel Unit.
75 HP American 3D Gas Hoist. New.
140 HP 2D Diesel Hoists 15000# SLP.
100 HP Lucey Portable Boilers. 200# WP.
50 ton American Diesel Loco., Crane 1947.
25 ton Ind. Brownhoist No. 5 Diesel Loco. Crane. New 1942.
80 ton Whitcomb Diesel Elec. Loco. 1943.
44 ton GE Diesel Elec. Loco. 1948.
¾ yd Bucyrus 22B Crane-Backhoe 1952.
2½ yd Manitowoc 3500 Diesel Crane.
2½ yd Koehring 1005 Diesel Crane 1952.
60 ton American R-25 Elec. Revolver.
10 ton Unit Mobile Crane Model 1020 12 tires. New 1946.

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St. St. Louis 1, Mo.

DIESEL POWER



IMMEDIATE SHIPMENT
• PURCHASE OR RENTAL
UNIT CAPACITIES—10 TO 2475 KVA
A.C.—50 AND 60 CYCLES
• ALSO D.C. UNITS

A PARTIAL LISTING OF OUR INVENTORY

KW	Make	Model	HP	RPM	KW	Make	Mode	HP	RPM
1180	Worthington	SEH-8	1685	360	320	Superor	60E-6	460	450
1136	Fairbanks Morse	38D	1600	720	360	Fairbanks Morse	32E14	450	300
1100	General Motors	16-278A	1600	720	300	General Motors	8-268A	450	1200
1000	General Motors	16-567B	1440	720	250	Clark	GD-4	375	360
750	General Motors	12-567	1080	720	200	General Motors	6-268A	350	900
700	Worthington	EE-8	1000	327	175	General Motors	12-71	275	1800
675	Fairbanks Morse	38D	960	720	150	Buckeye	80	240	600
500	General Motors	8-567	720	720	148	Fairbanks Morse	32E14	220	300
500	Alco	6-12 x13T	750	600	100	General Motors	3-268A	150	1200
350	Baldwin	VO-6	510	450	60	General Motors	6-71	90	1200
320	Enterprise	D8G-6	460	450					

A. G. SCHOONMAKER COMPANY, INC.
DIESEL DIVISION, 50 CHURCH ST., NEW YORK 7, N. Y.

FORSYTHE EQUIPMENT CO., INC.

MANITOWOC SPEEDCRANES

RENTALS

Capacities to 70 Tons
Booms to 140 ft. and 30 ft. jibs.
Special rates on long rentals

Exeter 2-6125 37-11 Vernon Blvd.
Long Island City 1, New York

PILE DRIVING EQUIPMENT

Vulcan and McKiernan-Terry
Steam Pile Hammers and Extractors
Drop Hammers - Driving Caps
Steel Leads - Pile Driver Hose
Hoists and Boilers

CONTRACTORS MACHINERY CO.
Phone VAlentine 4740 — 2637 SOUTHWEST BLVD. KANSAS CITY 8, MO

SALE OR RENT

ECA Special

1—CEMENT GUN, size N-2. Like new cond.

1—KOEHRING MUD JACK, Model-50-2A. A good buy.

1—BARBER-GREEN CONVEYOR, portable, 24" x 30'. Troughing type, gas powered.

1—UNIT WAGON CRANE, Model 1020, self-propelled, cap., 10 to 15-ton, 40' boom. Mounted on 12 pneumatic tired carrier, hydraulic steering, air brakes. Completely rebuilt.

Please contact your nearest ECA office.

Equipment Corporation of America
PITTSBURGH 30, PA., P.O. Box-933-J
CHICAGO 4, ILL., 327-J SO. LA SALLE ST.
CLIFTON HEIGHTS, PA., P.O. BOX-608-J
(suburb of Philadelphia)

FOR SALE OR RENT

1—35 ton, 4-wheel Diesel Electric Locomotive.
1—50 ton 0-4-4-0 Diesel Electric Locomotive.
1—25-ton Ind. Brownhoist Diesel Locomotive Crane.
1—10-ton Krane Kar.
1—Large Lot New Spare Parts for 25-ton Industrial Brownhoist Loco. Crane.
2—20 and 25 Ton Truck Cranes.
1—Burro Model 30 Rail Crane.

B. M. WEISS COMPANY
Girard Trust Building
Philadelphia 2, Pa.

LOW COST INSTALLATION AND OPERATION

CABLEWAYS
IMMEDIATE SHIPMENT
ELECTRIC, STEAM OR DIESEL
CAPACITY 3 TO 20 TONS
SELL, RENT OR BUY

FOR DAMS BRIDGES BREAKWATERS FILTRATION AND SEWERAGE PLANTS
FOR SPEED ECONOMY EFFICIENCY FLOOD SAFETY LABOR REDUCTION

AMBURSEN DAM CO. INC.
295 MADISON AVE. NEW YORK

FOR SALE

3 **LeTourneau C Roadsters** 12 cu. yd., 1953 and 1953, powered GM and Cummins diesel, excellent condition, good tires, available immediate delivery. $13,000.00 each.

1 **Caterpillar D8 with bulldozer.** 1953 machine, S.N. 13585. $14,500.00. Excellent condition, available immediately.

GIL BOERS EQUIPMENT CO.
7625 S. Kedzie Ave. Chicago 29, Ill.

NEW AND REBUILT
STORAGE BATTERY
LOCOMOTIVES
1½ to 10 Ton — 18" to 56" Track Gauge
GREENSBURG MACHINE CO.
Greensburg, Pennsylvania

PIPE
SURPLUS NEW and USED **FOR SALE**

Pipe Sizes ⅛" to 72" OD

CUTTING-THREADING-FLANGING-WELDING
BEVELING-BENDING-COILING-LINING
TO ALL STANDARD SPECIFICATIONS

PIPE, VALVES & FITTINGS
pipe piling • culverts • valves
specialists in prefabricating pipe

"one call gets them all"
fittings • FLANGES • WELDING • IRON-STEEL
SPEEDLAY pipe systems

ALBERT PIPE SUPPLY CO., INC., Berry at North 13 Sts., B'klyn, N. Y.

"EARTH BORING MACHINERY"

is our specialty.

Complete parts stock used or new, available for Sterling, Jaques, and other special makes. Orders promptly filled.

Make your next digger a "STERLING"—rebuilt or new, 3 models available to fit your needs.

Ask for a demonstration.

Wyoming Valley Equipment
714 Wyoming Ave., Kingston, Pa.
Phone BU 7-3158

When you need
PILING . . . fast

use this section, as many contractors do, as a piling buying directory. It can save you time when you want to know, quickly, where to buy good new or used piling.

PIPE
VALVES and FITTINGS
All Sizes in Stock
NEW—USED
GREENPOINT IRON & PIPE CO. INC
Bogart and Stagg Streets Brooklyn, N.Y.

For Sale
COMPLETE SAND PLANT
Capacity 125-150 Tons Per Hour

With Following Equipment

1 Eagle Double Screw Classifier-Dehydrator, 84" x 25' Tub, 36" Dia. Flights, 30 HP 220/440 V Motor
1 Woods 96" Sand Classifier
1 Woods 72" Sand Classifier
1 Auto-Vortex Bowl Classifier, 20'
1 Ruth Rod Mill 4' x 11' with D13000 Generator
1 Conveyor 30" x 200' w/30 HP Motor
1 Conveyor 30" x 100' w/20 HP Motor
1 Conveyor 30" x 140' w/10 HP Motor
2 Ripl-Flo Double Deck Screens, 4' x 12'
1 Johnson 35 c.y. Steel Hopper w/Clam Gates
1 Steel Hopper 28 c.y. and Steel Decking
1 Pomona Vertical Pump 12" 3 Stage—40 HP Motor
1 Nagle Horizontal Pump 3", Type T-#95J
1 Lighting Pump, 4" Model X
1 Marlow Pump, #10EV w/½ HP Motor
2 Syntron Vibrators
3 Syntron Vibrators—V200
1 Syntron Feeder 37N-F22, w/Electric Motor
5 Tunnel Gates
102 L.F. Tunnel Liner Plates 84" Dia. 7 Gauge
1500 L.F. App. 8"—12 Gauge Spiral Steel Pipe
30 L.F. Metal Culvert Pipe 84"—8 Gauge
270 L.F. 8" Vitualic Steel Pipe
Complete with Electric Controls.

Would Consider Sale of Individual Items. This plant produced Corps of Engineers Specification Sand, Garrison Dam. Can be inspected at Riverdale, North Dakota.

Price Where-is As-is Subject Prior Sale
F.O.B. Cars, Riverside, North Dakota
$48,000.00

For Further Information Write:

GARRISON SPILLWAY CONSTRUCTORS
Riverdale, North Dakota
Tel. Riverdale 633

PUMPS: 2—10,000 GPM at 280 ft. head, 20" suction, 18" discharge, 800 H.P., 2200 volt, 1180 RPM, with automatic control equipment. NEW condition.

OVERHEAD ELECTRIC TRAVELING CRANES: 10 ton capacity, 54 ft. span, 4 motor, bucket operating, cage control, 440 volt, A.C., with quantity of new parts. Other cranes A.C. and D.C., 5 to 150 tons capacity, various spans.

LOCOMOTIVE CRANE: 25 ton capacity, standard gauge, gasoline powered, cast steel trucks, air brakes, with or without 1¼ yd. Williams clam shell bucket, thoroughly modern, excellent condition. Located Minnesota. For sale or rent.

LOCOMOTIVES: 2—65 ton, diesel electric, standard gauge, thoroughly modern, excellent condition. For sale or rent.

JAW CRUSHERS: Allis Chalmers 18" x 30", sectionalized for underground use, V-belt, 50 H.P., 220/440 volt motor, NEW condition. Also, 48" x 60", 42" x 40" and 36" x 48", with or without motors and drives. Other sizes from 4" x 6" to 48" x 60".

We Buy and Sell Equipment Throughout North and Central America

A. J. O'NEILL
Lansdowne, Pa.
Phila. Phones: MAdison 3-8300—3-8301

EUCLIDS
Used 13 yd. bottom dumps
Cummins & General Motors Powered
Located - Texas - Pa. - N. Y. State
Write, Wire or Phone
L. B. SMITH, INC.
Camp Hill, Penna.
***Tel:* Harrisburg, Regent 7-3431**

OVERHEAD CRANES
For Sale

Capacity	Span	Volts	Girders	Ser. Nos.
15 Ton	75' 1"	DC	FB Box	7378
20 Ton (2)	60' 0"	DC	FB Box	7381-2
15 Ton (2)	56' 11"	DC	FB Box	7379-80
20 Ton (2)	38' 5"	AC	FB Box	7385-6
15 Ton (2)	23' 11"	AC	Straight	7383-4

GEORGE M. MERIWETHER
1712 Seventh Avenue, No.
Birmingham 4, Alabama
TELEPHONE 54-2456

SCHOOL BUSES
NEW — USED
All makes and sizes
Delivery by School Opening

TRANSIT SALES & SERVICE, INC.
23 SOUTH STREET
DANBURY, CONN.
TEL. Pioneer 3-4437

Completely rebuilt and guaranteed
KOEHRING TWINBATCH 34E PAVER
Serial #19376, GM diesel, over $4,000.00 in parts and labor used in rebuilding. Machine in perfect condition. Ready for immediate inspection and delivery.
Price $14,000.00 f.o.b. Chicago.
GIL BOERS EQUIPMENT CO.
7625 S. Kedzie Ave., Chicago 29, Ill.

CRANES FOR RENT

CRAWLERS	Capacities to 60 tons Booms to 180 ft.
TRUCK CRANES	Capacities to 35 tons Booms to 130 ft.

P and H. Lima and Manitowoc.
Top-Condition erection cranes

ROGER SHERMAN
CRANE SERVICE, INC.
East Hartford, Connecticut JAckson 8-4106

FOR SALE
Completely modernized and in A1 condition—30 cu. yd. bucket, 150 ft. boom, 72 ft. dipper handle. Now in operation and may be inspected at Shasta Coal Corporation mine, Bicknell Indiana.

Available at end of two years or possibly sooner.

SHASTA COAL CORP.
6 NO. MICHIGAN AVE., CHICAGO

FOR SALE:
Used Standard 4000 pound
ASPHALT PLANT
With dust collector, dust elevator, electric starters, steam generator, etc., in top operating condition.

RETT COLE
244 Grove Street, Brooklyn 37, New York.
Telephone: GLenmore 6-3621.

FOR SALE OR RENT—EASY TERMS
Rebuilt — A 1 Condition
48B Bucyrus Erie Shovel 2 cy Diesel
Caterpillar Auto Patrol No. 12
Caterpillar D8 Bulldozer
Caterpillar Scraper Model 80
3—Caterpillar DW 10's

WILLIAMS CONSTRUCTION COMPANY
Box 145 Balto. 20, Md. Murdock 6-6600

DRAGLINE - 3 YARD
MARION Model 93M, Serial #9676 Caterpillar D17000 Diesel Engine Air Controls—20-ft. Crawlers, 36" treads, 70' boom, 3 Yard Hendrix Bucket. Machine purchased new 1952. Never worked over 8 hrs. per day. Very Good Condition.

Rental or Rental Purchase

Anderson Equipment Company
BOX 1737, PITTSBURGH 30, PENNA.
Phone: LEhigh 1-6020

ELECTRICAL
WIRE AND CABLE
—YOUR BEST SOURCE—
• for every industrial and power application
• Odd lengths—long and short—reasonably priced
One of the Largest Stocks in the Midwest
Let us quote on requirements—
send your inquiries
We'll also buy your Surplus
Branch Offices:
Houston— Walnut 3-4580
Los Angeles— ANgeles 3-5148
FOR YOUR TEMPORARY NEEDS TRY OUR SURPLUS DIVISION
UNIVERSAL Wire and Cable Co.
2666M N. Clybourn Ave., Chicago 14, Ill.
EAstgate 7-4777 Code: UNIWIRE

FOR SALE
One—25 Ton Steel Erectors
Guy Derrick—114' Mast—105' Boom
Price $2500

ABERTHAW COMPANY
133 Southampton St., Boston, Mass.
Tel. Highlands 5-6700

PUMPCRETE BARGAIN
Model 200 Rex Single Pumpcrete, with Re-mixer, Electric Motors, and 1000 ft. of Model 80 Pipe; also miscellaneous ells, pipe, etc. Only used on one 5000-yard job.

BOEHCK ENGINEERING CO., INC.
P. O. Box 12187, Houston, Texas
Phone OLive 4-4331.

Lorain 820
CRANE OR DRAGLINE
S/N 17646 Cat. 13000 Price $18,500
Wanted—Hyster Towing Winches—All sizes.

A. C. R. CO.
19615 Nottingham Rd., Cleveland 10, Ohio

VULCAN
PILE HAMMERS AND EXTRACTORS
REBUILT AND REPAIRED
AT FACTORY STANDARDS
327 N. BELL AVE., CHICAGO 12, ILL.

FOR SALE
2—ELGIN STREET SWEEPERS
Model 81 — 1948, Good condition
Ready for use.....$4000 — each.

NORTH JERSEY EQUIPMENT CO.
450 State Highway #1 Newark 5, N. J.

FOR SALE

One La Plant Choate Scraper TS300 with L Plant Choate Tractor 6DAS
Price $11,900.00

Two Euclid Scrapers 14SH with Euclid 7TDT Tractors Price each $11,400.00

Three Euclid 58W bottom dump wagons with Euclid 25FDT Tractors
Price each $6,900.00

This equipment is in excellent condition and may be inspected at the J. M. Huber Corporation Mine Shop, Huber, Twiggs County, Georgia.

For additional information call or write

J. M. Huber Corporation
100 Park Avenue, New York City 17,
or Huber, Twiggs County, Ga.

FOR SALE

New and Used material—Immediate delivery from stock Angles, Channels, I and WF Beams, especially for Contractors needs

H BEAMS

50 pcs	10" B P S	42#	48/60'
46 "	10" B P S	57#	40/67'6"
60 "	12" B P S	53#	60'
63 "	14" B P S	73#	60/75'

PILE SECTIONS

Phone or Wire your steel requirements

We are also interested in purchasing your surplus material.
We assure you our prices will be the best obtainable.

HY DRACHMAN STEEL CORP.

Warehouse
1423 34th Avenue, Astoria, New York
AStoria 8-4484 8-8023

Sales Office
563 East Tremont Ave., New York City, N. Y.
CYpress 9-5440

---

36 TANK CARS TANKS
10,000 & 8000 GAL. CAP.—WITH OR WITHOUT HEATING COILS
Shipment N. J.—Ill.—Ark.—Kan.

LESTAN CORP.
Rosemont, Penna.

FOR SALE
One (1) Northwest
Model 80-D SHOVEL
S/N 12636. Good Condition.

Fehrs Tractor & Equipment Co.
1909 Cuming St. Omaha 2, Neb.

FOR SALE
ROAD FORMS

10,000 Feet, Blaw-Knox, 10" Heavy Duty Road Forms, 10' sections, excellent condition. Write:

W. L. JOHNSON CONSTRUCTION CO. AND ASSOCIATES
P. O. Box 668, Bexley Station
Columbus 9, Ohio or call Groveport, Ohio 7-3324

PILING

SURPLUS NEW and USED For Sale or Rent

RAILS-TIES

TRACK ACCESSORIES

NEW and RELAYING

RAILS

FOR IMMEDIATE DELIVERY

500 Tons	80# ASCE	Relay
400 Tons	90# ARA-B	Relay
150 Tons	90# ASCE	Relay

TIE PLATES • Excellent Relay
TURNOUTS — LIGHT RAILS
TRACK ACCESSORIES

MORRISON
RAILWAY SUPPLY CORP.
814 Rand Bldg. Buffalo 3, N. Y.
MOhawk 5820

We do a Nation-Wide business in

STEEL SHEET PILING

IMMEDIATE SHIPMENT

685 pcs. 68-39 ft. Carn. MP-101—West Coast
396 pcs. 60-50 ft. M-116 & M-115—Illinois
400 pcs. 60-30 ft. Beth. DP-2—New York
504 pcs. 60 ft. M115, M112, M116—Kansas City
80 pcs. 50 & 40 ft. Carn. M-112—N. Dakota
86 pcs. 40 ft. Carn. M-116—S. Carolina
130 pcs. 30 ft. Carn. M-115, Ohio.

Other Lengths & Sections at Various Locations

PILE DRIVING EQUIPMENT

Vulcan and McKiernan-Terry Steam Pile Hammers and Extractors Hoists and Boilers

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., Chestnut 1-4474, St. Louis, Mo.

STEEL SHEET PILING

86—Pcs. M-116, 48 to 51 ft., Georgia
59—Pcs. DP-2, 47 to 52 ft., Georgia
200—Pcs. M-116, 40 to 60 ft., Chicago
150—Pcs. M-115, 50 to 60 ft., Chicago
75—Pcs. M-112, 60 ft., Chicago
80—Pcs. M-116, 25 to 30 ft., Minnesota
80—Pcs. MZ-38, 10 to 40 ft., Kansas City
55—Pcs. M-116, 60 ft., Kansas City
68—Pcs. M-112, 40 to 50 ft., North Dakota
600—Pcs. MP-101, 40 to 70 ft., Washington

Available for Prompt Shipment
Other Lots at Various Locations

CONTRACTORS MACHINERY CO.
Phone VAlentine 4740
2637 SOUTHWEST BLVD
KANSAS CITY 8 MO

NEW—RAILS—Relayers

All sizes and weights. Also frogs, switches, spikes, bolts, tie plates, contractors' and mine equipment carried in stock.

M. K. FRANK

480 Lexington Ave. New York, N. Y. Reno, Nevada
Park Bldg. Pittsburgh, Pa. Carnegie, Pa.

STEEL SHEET PILING IN U.S. & CANADA
125 TONS ALGOMA B6—20', 35' & 40' CANADA.
800 TONS BETH. SP4—20, 30, 35' US & CANADA.
600 TONS BETH. DP2—AP-3—40 & 60 FT. N.Y.
500 TONS BETH. DP1—ZP32—45/50 FT. N.Y.

9 DIESEL LOCOMOTIVES
G.E. 25, 35, 45, 65, 80 & 100 TON.

20E CLYDE ELEC. WHIRLEY 45 TON
100' BOOM—30' GAUGE—3 DRUM HOIST.

NEW 1953 MIX & BATCH PLANT
400 YD. JOHNSON OCTAGON BIN, WEIGHERS, 800 BBL. CEMENT BIN, CONVEYORS, FEEDERS, 3—2 YD. TILT MIXERS. ALL COMPLETE.

PORT. AGGREGATE PLANT
PIONEER 150 PG PRIMARY, 140S SECONDARY, 40S W WASHING PLANT & SAND EJECTOR.

DARIEN — 60 E. 42nd St., N. Y. 17, N. Y.

RENT STEEL SHEET PILING

Get the exact lengths and sections you need from Foster—all standard makes, delivered *on time*—and at Foster's standard low rental rates. Also Rental Pile Hammers & Extractors.

L.B. FOSTER CO.
PITTSBURGH 30 • NEW YORK 7 • CHICAGO 4
HOUSTON 2 • LOS ANGELES 5

RAILROAD Cross and Switch TIES

Promptly from adequate stocks
NEW and USED *(as available)*

GILLIS & COMPANY
29 East Madison St. . . Chicago 2

GREENHEART

PILING • TIMBER • LUMBER
Rated f3300 by N. Y. Port Authority
Fire and Marine Borer Resistant
GREENHEART (DEMERARA) INC.
52 Vanderbilt Ave — New York 17, MU 6-0410

When you need PILING . . . fast

use this section, as many contractors do, as a piling buying directory. It can save you time when you want to know, quickly, where to buy good new or used piling.

PROFESSIONAL SERVICES

NEW ENGLAND

Engineering Services Inc.
Foundation Investigations.
Soil Testing & Test Borings
Minerals Exploratory
Service

119 New London Tpk. Glastonbury, Conn.

Jackson & Moreland
Engineers and Consultants
Design and Supervision of Construction
Reports—Examinations—Appraisals
Machine Design—Technical Publications
Boston New York

Metcalf & Eddy
ENGINEERS
Investigations Reports Design
Supervision of Construction and Operation
Management Valuation Laboratory
1300 Statler Building, Boston 16

MIDDLE ATLANTIC

Alster & Associates, Inc.
Photogrammetric Engineers
Topographic Mapping, Planning, Surveying, Map Consultants, Photo Mosaics.
6135 Kansas Ave., N. E.
Washington 11, D. C.
Phone: Taylor 9-1167

Greer Engineering Associates
SOIL MECHANICS
Foundation Designs and Analyses
Airphoto Soils and Geological Mapping
Undisturbed Sample Borings
Field and Laboratory Soil Tests
Geological Studies for Engineering Projects.
Earth Dam Design and Control
98 Greenwood Ave, Montclair, N. J.

Edwards, Kelcey & Beck
Consulting Engineers
Reports, Design Supervision
Subways, Expressways, Traffic, Parking
Harbor Works, Bridges, Tunnels
Housing and Industrial Developments
Newark, New Jersey
New York Philadelphia Boston

Porter, Urquhart, McCreary & O'Brien
O. J. Porter & Co.
CONSULTING ENGINEERS
Airports—Highways—Expressways—Buildings—Bridges—Dams—Harbors — Foundations — Stabilization — Pavements
Reports, Designs & Supervision
415 Frelinghuysen Ave., Newark 5, N.J.
615 Eighth Avenue, New York 18, N.Y.
3568 W. Third St., Los Angeles 5, Cal.
503 Market St., San Francisco 5, Cal.
516 Ninth Street, Sacramento 14, Cal.

Ammann & Whitney
Consulting Engineers
Design and Supervision of Construction of Bridges, Highways, Expressways, Buildings, Special Structures, Airport Facilities
111 Eighth Ave., New York 11, N. Y.
724 E. Mason St., Milwaukee 2, Wisc.

E. Lionel Pavlo
Consulting Engineer
Design, Supervision, Reports
Bridges, Highways, Expressways
Marine Structures, Public Works
Industrial Construction, Airports
7 E. 47th St. New York 17, N. Y.

D. B. Steinman
Consulting Engineer
BRIDGES
HIGHWAYS
Design, Construction
Strengthening, Investigations,
Reports, Advisory Service
117 Liberty St., New York 6, N. Y.

Severud-Elstad-Krueger
Consulting Engineers
Structural Design - Supervision
Reports - Buildings - Airports
Special Structures
415 Lexington Avenue
New York 17, N. Y.

Toledo Testing Laboratory
Engineers—Chemists
Concrete — Soils — Asphalt
Inspection Research
Tests Development
Foundation Investigation
Borings — Diamond Drilling — Lead Tests
Soils Mechanics Laboratory
1810 North 12th St. Toledo 2, Ohio

Michael Baker, Jr., Inc.
Consulting Engineers, Civil Engineers, Planners & Surveyors; Airports & Highway Design; Water Works & Sewerage Design & Operation; Aerial Topo Maps; Surveys; Reports & Investigations; Irrigation. Home Off.—Rochester, Pa. Br. Off.: Jackson, Miss.; Harrisburg, Pa.; College Park, Md.

Buchart Engineering Corp.
Engineers
Highways — Bridges — Toll Roads
Sewerage — Industrial Waste and Disposal — Water Works — Surveys — Reports — Design — Supervision — Consultation — Industrial — Municipal — Structures
611 W. Market St., York, Pennsylvania

SOUTH

Duval Engineering & Contracting Co.
General Contractors
FOUNDATION BORINGS
For Engineers and Architects.
Jacksonville Florida

Rader Engineering Co.
Water Works, Sewers, Refuse Disposal, Ports, Harbors, Flood Control, Bridges, Tunnels, Highways, Airports, Traffic, Foundations, Buildings, Reports, Investigations, Consultations.
111 N.E. 2nd Ave., Miami 32, Florida

CHECK this section whenever you need professional advice.

When you need a SPECIALIST in a hurry . . .
Engineering News-Record's Professional Service Section offers the quickest, most direct method of contacting consultants who may be available NOW.

John J. Harte Co.
Engineers • Architects
Water • Sewer • Gas • Highways
Airports • Chemical Process • Industrial
Power • Aerial & Ground Surveys
284 Techwood Dr., Atlanta, Ga.
New York • Washington • Foreign

MIDDLE WEST

Consoer, Townsend & Associates
Water Supply, Sewerage, Flood Control & Drainage, Bridges, Express Highways, Paving, Power Plants, Appraisals, Reports, Traffic Studies, Airports, Gas & Electric Transmission Lines.
351 East Ohio St., Chicago 11, Illinois

Harza Engineering Co.
Consulting Engineers
Calvin V. Davis E. Montford Fuelk
Richard D. Harza
Hydroelectric Plants and Dams
Transmission Lines
Flood Control, Irrigation
River Basin Development
400 West Madison Street Chicago 6

DREDGING

Frank Hefling
Air Lift Suction Dredging Cuts Costs.
Cofferdams, Aerate sewage movements
Dredges solids pipe size. No priming. No loading. No pump impellers, Ck. valves, cutter heads. Efficient in deep water, digs under waters, highly mobile.
P. O. Box 60 Chicago 90; Ph. ES-5-7010

GEOLOGISTS

Geologic Associates
ENGINEERING GEOLOGISTS
Studies and Reports
Foundation Investigations
Specialized Drilling and Sampling
1506 8th Ave. So — Nashville, Tenn.
9-1519 Phones 5-4402

INSPECTION & TEST

Johnson Soils Engineering Laboratory
Foundation Design - Highway & Airport Pavements - Construction Control - Load Tests - Shear & Consolidation Tests - MOBILE LABORATORIES
193 West Shore Ave., Bogota, N. J.
Bogota-Hubbard 7-4408

SEARCHLIGHT SECTION
(Continued from preceding page)

SURVEYING INSTRUMENTS
USED • REBUILT • SALE • RENT • REPAIRING

TRANSITS AND LEVELS

New or Rebuilt
Sale or Rent
Headquarters for REPAIRS — any make — Factory Service. We will also *buy* your old instruments or take them in *trade*.
A complete line of Engineering Instruments and equipment for field or office. Write for Catalog NRL 59.
WARREN-KNIGHT CO.
Manufacturers of Sterling Transits and Levels
136 No. 12th St., Philadelphia 7, Penna.

FROM STOCK

Brand New & Rebuilt
TRANSITS & LEVELS
Fully equipped modern shop—all makes and models repaired—all work guaranteed — instruments rented
Midwest Representative: W. & L. E. Gurley
NATIONAL BLUE PRINT CO.
Established 1914.
210 S. Canal St. Chicago (6), Ill.

IF THERE IS
Anything you want
that other readers of this paper can supply
OR—
Something you don't want
that other readers can use, advertise it in the
Searchlight Section

RE-BUILT REPAIRS RENT REAL EXPERTS
ALL MAKES
BUFF

69 Day St., New York WOrth 2-2797

SPECIALIZED REBUILDING
of surveying and engineering instruments.
All makes and models expertly repaired in modern shop. All work guaranteed.
USED REBUILT INSTRUMENTS
for sale or rent
ROY D. HICKERSON
8 N. EDMONDSON AVE. INDIANAPOLIS 19, IND.

ADVERTISERS IN THIS ISSUE

Aero Service Corp. 42
Amer. Hoist & Derrick Co. 27
Amer. Marietta 45
Armco Drainage & Metal Prod., Inc. .....2nd cover
Automotive & Aircraft Div., Amer. Chain & Cable Co. 55

Barber-Greene Co. 95
Belmont Iron Works..... 78
Bethlehem Steel Co. .....3rd cover
Bruning Co., Inc., Charles..... 33
Buffalo Forge Co. 53
Byers Co., A. M. 18

Cement Gun Co. 56
Concrete Reinforcing Steel Institute..... 78
Contractor's Register..... 50
Copperweld Steel Co. 81

Douglas Fir Plywood Assoc. 10
Dudgeon, Inc., Richard..... 81

Earle Gear and Machine Co. 65
Economy Forms Corp. 66
Electric Tamper & Equip. Co. 32

Fairbanks-Morse Co. 81
Fate-Root-Heath Co. 15

General Electric Co. 48, 49
General Motors Truck Div., G.M.C. 14
Goldblatt Tool Co. 64
Greenlee Tool Co. 62
Griffin Wellpoint Corp. 66
Gunite Concrete & Const. Co. 65

Harnischfeger Corp. 1
Hose-McCann Telephone Co., Inc. 64

Imperial Pencil Tracing Cloth..... 78
Ingalls Iron Works Co. 56
International Harvester Co. 28, 29
International Harvester Co. (Trucks).... 59
Irving Subway Grating Co. 51

Jackson Vibrators, Inc. 32
Jones & Laughlin Steel Corp. 12, 13

Kern Instrument Co. 52

Levinson Steel Co. 77
Lincoln Electric Corp. 37
Lipe-Rollway Corp. 41
Lone Star Cement Corp. 20
Lycoming Div., Avco Mfg. Corp. 6, 7

Mahon Co., R. C. 67
Maxon Const. Co. 63
McGraw-Hill Book Co. 80
McKiernan-Terry Corp. 78
Midwestern Ind., Inc. 65
Mueller Co. 71

Noble Co. 9
Northwest Engineering Co. 3

Ozalid Prod. Div., General Aniline & Film Corp. 54

Pennsylvania Drilling Co. 63
Phoenix Bridge Co. 95

Ramset Fasteners, Inc. 57
Republic Steel Corp. 38, 39
Ryerson & Sons, Inc., Jos. T 16

Smith Co., S. Morgan..... 76
Sonoco Prod. Co. 46, 47
Spencer, White & Prentis, Inc. 31
Sprague & Henwood, Inc. 63
Symons Clamp & Mfg. Co. 2

Texas Co. 4, 5
Timken-Detroit Axle Div., Rockwell Spring & Axle Co. 60, 61
Timken Roller Bearing Co. .....4th cover
Tinney Drilling Co. 65
Truscon Laboratories..... 40

Warren-Knight Co. 81
Weil Pump Co. 30
Wheeling Corrugating Co. 79
Wickwire Spencer Steel Div., Colorado Fuel & Iron Corp. 11

Yeomans Brothers Co. 8

Professional Services..... 94

CLASSIFIED ADVERTISING
T. J. Eberle, Ass't. Mgr.

Employment Opportunities.....87-89
Educational 90
Proposals 82-86
Equipment (For Rent, Sales Wanted)...90-94

ENGINEERING NEWS-RECORD
330 West 42 St., New York 36—LOngacre 4-3000

ABC Member

Number of copies of this issue printed 68,441

D. S. Robertson, Advertising Manager
Howard T. Olsen, Business Manager

ADVERTISING REPRESENTATIVES
New York, 36—330 W. 42 St.,
M. J. Storz, C. D. Neulen, S. Kennedy
Chicago, 11—520 No. Michigan Ave.,
L. H. Hunt, W. G. Payne
San Francisco, 4—68 Post St.,
R. C. Alcorn
Philadelphia, 3—17th and Sansome Sts.,
A. B. Cozzens, D. G. Jensen
Cleveland, 15—Hanna Bldg.,
E. E. Duff, Jr., F. P. DiToro
Detroit, 26—Penobscot Bldg.,
J. A. Houghton
St. Louis, 8—Continental Bldg.,
B. F. Horn
Los Angeles, 17—1111 Wilshire Blvd.,
H. L. Keeler
Atlanta, 3—Rhodes-Haverty Bldg.,
W. D. Lanier
Dallas, 1—First National Bank Bldg.,
J. H. Cash

OTHER SALES OFFICES:
Pittsburgh, 22—919 Oliver Bldg.,
Boston, 16—350 Park Square Bldg.,
London, McGraw-Hill House

848 series
High-capacity line (80 to 200 tons per hour) for Highest Type Mixes, Cold Aggregate Control, Stabilization, and Road-Mix (Travel Plant).

845 series
Capacities of 50 to 70 tons per hour. An engineering achievement in compactness and portability.

840 series
Delivers 20 to 40 tons per hour; all types of mixes possible, including highest types.

804 mixall
For all the hot patch material you want, 5 tons per hour; cold mix, 10 tons per hour.

BG **BITUMINOUS PLANTS**

see your B-G distributor or write

Barber-Greene
AURORA, ILLINOIS, U. S. A.

from
●
●
OFFICE MANAGER
●
to
●
GENERAL MANAGER
●
●

yes, that is the quality of the personnel available to your organization through the Classified Advertising pages of ENGINEERING NEWS-RECORD.

Classified Advertising Division
ENGINEERING NEWS-RECORD
330 W. 42nd St. New York 36, N. Y.

PHOENIX BRIDGE COMPANY
Engineers—Fabricators
Erectors
Structural Steel
BRIDGES and BUILDINGS
AISC
General Office and Shops
PHOENIXVILLE, PA.
Subsidiary—Barium Steel Corporation

EDITORIALS

Local Leadership Needed for Flood Protection

THE MAMMOTH TASK of cleanup and repair forced on the states and cities damaged by the floods that struck the Northeast U. S., Aug. 17-20, is being undertaken with great courage and resourcefulness. But it would be even more heartening to be able to report that the great destruction suffered had fathered a determination to do everything possible to prevent a repetition of the disaster. Signs of such determination, however, are still lacking, particularly where they would be most significant—on the local government front.

Local apathy and opposition to congressionally authorized flood control proposals, cost the states of Connecticut, Massachusetts and Rhode Island a good many million dollars in last month's floods. And this fact must continue to cast a pall over the recommendation made last week by General Sturgis, Chief of Engineers, that these latent projects plus others to cost $150 million more must be built to assure against a recurrence of a major flood disaster in southern New England. They cannot be built unless the local people want them and will work for them.

Ever since Congress, back in the Thirties, placed the federal government in the role of principal flood-control planner and provider, local enthusiasm for flood control has been hard to generate. Sometimes it is federal "interference" that is resented. Or the cost of land and easements, required to be paid for locally, runs into taxpayer opposition. Or it may be simply that the necessary physical changes called for are considered to be inconvenient. Whatever the cause, local initiative in flood protection is far from what it should be—not only in New England but elsewhere.

There are exceptions, however, and Pennsylvania, hard hit in the recent storm, should be mentioned since its Department of Forests and Waters has built several flood control dams at state expense. But it is in California that a procedure has been developed that shows great promise as a means of enlisting local participation in flood protection and giving it force and purpose. This is the plan of its Division of Water Resources to draw up complete development schemes for entire streams or river basins, leaving for future decision who will eventually finance and build the several projects involved.

A good example of how the plan works is afforded by a study just completed for the American River basin. There are already two federal dams on this river, but the study came up with 22 more plus a system of conduits to carry the water to proposed hydro plants and irrigation projects. The report is advisory only, but available for the use of any agency—public or private—considering projects on the river. It is a state master plan, and as such may be supposed to reflect needs and wishes of the local people.

This California procedure could well be considered by the New England states, both those in the path of the latest flood and the others fortunate enough this time to escape. It is true that the local New England viewpoint was given opportunity for expression in the recent comprehensive report of the New England-New York Inter-Agency Committee, but the leadership there came from the federal government, with the states following along, some reluctantly. And it is further true that the New England states exhibited local initiative in the compact that Connecticut and Massachusetts made with New Hampshire and Vermont to help pay for storage reservoirs in the latter two states. But by and large local leadership has been lacking, and it is this lack that keeps vital projects on paper long after they should be built.

No doubt the New England situation is more difficult than in Pennsylvania or California because of the presence of more interstate streams. Nevertheless state plans are possible, and the interstate relationships could be handled. Moreover, cities, through zoning and building ordinances, could do a good deal more than they have done to improve their flood protection.

The mere development of home-grown plans would enlist a degree of local support apparently unattainable when a plan is proposed by the federal government. Once this local support is available, the federal plans would have more chance to be carried out—or alternately, state, local or private interests could undertake individual projects, always with the certainty that they fitted into a sound development plan for the river basin.

In one way or another, local support must be obtained if flood protection is ever to be really effective in New England. Developing master plans on the local level may be one way to get it. It is sincerely to be hoped that the people of New England may find in this device—or some other even more effective—a way to assure their safety from another such disaster as the one they have just suffered.

More Uniform Traffic Control

FLORIDA'S State Road Department has won from the state legislature a prize that many other state highway departments covet. It has been granted absolute control of traffic on all state roads regardless of municipal boundaries. No longer can the town fathers of small municipalities set speed and traffic laws to meet their own whims. The Road Department even has control of parking on state roads.

It could be advantageous if more states followed Florida's example. One of the chief reasons for the widespread disregard for speed-limit signs in this country is the almost universal abuse of them by towns and cities. With state highway departments in control much of this abuse could be eliminated.

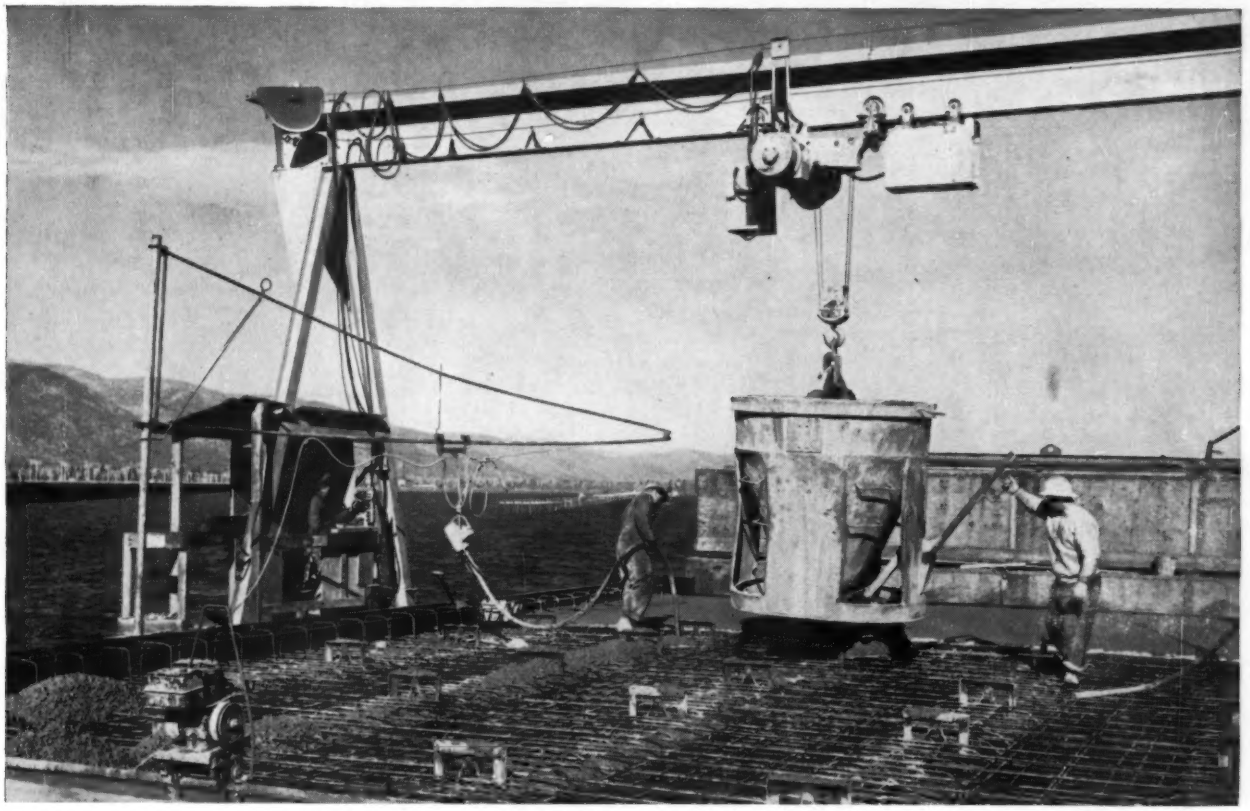

Joint contractors for the Lake Pend Oreille bridge are Peter Kiewit Sons' Co., Omaha, Neb., and Le Boeuf Dougherty Contracting Co. of Richmond, Calif. *Supervisory Authority:* Idaho Department of Highways. Seattle Concrete Pipe Co. is sub-contractor for precast concrete work on shore.

Steel-Reinforced Deck Units, 35 ft Long, Precast on Shore for Idaho Lake Bridge

When an old wooden bridge across Lake Pend Oreille in Idaho needed replacing, exhaustive studies were made as to the type of new bridge that would be built, and its exact location. The bridge is an important link in the route which connects northern Idaho with Spokane and other points south. A good deal of time and mileage are saved by crossing Lake Pend Oreille rather than going around it.

The new bridge, now under construction, is 6000 ft long. Basic design includes bents spaced generally every 35 ft except for an 82-ft navigation span. A complete concrete precasting and steam-curing operation was set up on shore to build 154 35-ft trestle spans and 25 half or 17-ft spans. Special equipment was devised to ferry and place the 70-ton,

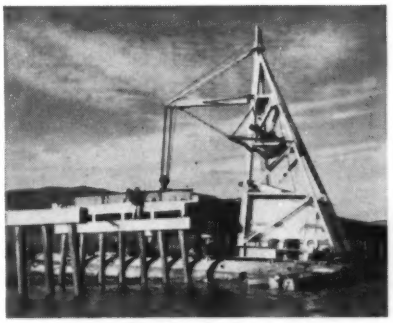

Special floating derrick ferries deck unit to bridge. Each unit weighs about 70 tons.

30-ft-wide deck units. In addition, this equipment was used in setting forms and pouring the concrete for capping the piling.

The on-shore casting is done on a pier long enough to hold five deck units at a time. The slabs, which include stringers and curbing cast integrally with the deck, are lifted by coil loops cast in the longitudinal beams. Steam-curing on the site develops the concrete strength called for in the specifications in 48 hours.

Bethlehem is supplying 750 tons of reinforcing bars for the Lake Pend Oreille bridge. The bars are shipped completely fabricated, bundled and tagged, and ready for placing.

TEN BAR FABRICATING SHOPS AT YOUR SERVICE

Boston New York Philadelphia Johnstown, Pa. Baltimore Buffalo Detroit Chicago St. Paul Seattle

BETHLEHEM STEEL COMPANY
BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. *Export Distributor:* Bethlehem Steel Export Corporation

BETHLEHEM STEEL

BETHLEHEM STEEL

New portable plant produces 7½ tons of ¾″ aggregate per minute

TIMKEN® bearings absorb the shocks

THE "All American 77", Diamond Iron Works' new crushing and screening plant can be towed as a trailer or as a separate unit—yet it crushes as much as 450 tons per hour of ¾″ aggregate in 25-35% crush, field reports say. To take the rugged shock loads, it relies on 18 Timken® tapered roller bearings: eight on the jaw crusher, six on the oversized star gear roll crusher, and four on the deck vibrating screen.

Timken bearings take the heavy, jarring shock loads with ease because the rollers and races are case-carburized to give them a hard, wear-resistant surface over a tough, shock-resistant core. And line contact between rollers and races gives them extra load carrying capacity.

The tapered construction of Timken bearings lets them take both radial and thrust loads in any combination. And by holding housings and shafts concentric, Timken bearings make closures more effective—keep dirt and moisture out, lubricant in. Maintenance costs are cut.

Specify Timken bearings for all the machinery you build or buy. You get longer life, less friction, minimum maintenance. Look for the trade-mark "Timken" on every bearing. The Timken Roller Bearing Company, Canton 6, Ohio. Cable address: "TIMROSCO".

This symbol on a product means its bearings are the best.

DIAMOND IRON WORKS, DIVISION GOODMAN MANUFACTURING CO., mounts the jaw crusher, roll crusher and deck vibrating screen on Timken bearings to assure less maintenance, longer life.



TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.

TAPERED ROLLER BEARINGS



HARD ON THE OUTSIDE, TOUGH ON THE INSIDE

Rollers and races of Timken bearings are case-carburized to give a hard, wear-resisting surface and a tough, shock-resisting core. Result: longer bearing life.

The Timken Company leads in: 1. advanced design; 2. precision manufacture; 3. rigid quality control; 4. special analysis Timken steels.

NOT JUST A BALL ○ NOT JUST A ROLLER ▭ THE TIMKEN TAPERED ROLLER ▭ BEARING TAKES RADIAL ▯ AND THRUST →▯← LOADS OR ANY COMBINATION →✳←